



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWO-068697]
 Machine Id
VOLVO L150H 22611
 Component
Transmission (Auto)
 Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP438019	VCP402484	VCP369490
Sample Date		Client Info		04 Jan 2024	08 Mar 2023	08 Nov 2022
Machine Age	hrs	Client Info		13655	12385	12113
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	72	▲ 196	▲ 189
Chromium	ppm	ASTM D5185m	>2	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>5	2	2	1
Lead	ppm	ASTM D5185m	>75	<1	0	0
Copper	ppm	ASTM D5185m	>75	3	4	5
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	4	4	3
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	2
Boron	ppm	ASTM D5185m	187	74	63	66
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	1	<1	0
Manganese	ppm	ASTM D5185m	0.0	<1	2	<1
Magnesium	ppm	ASTM D5185m	6.8	3	6	0
Calcium	ppm	ASTM D5185m	215	67	102	74
Phosphorus	ppm	ASTM D5185m	445	233	177	166
Zinc	ppm	ASTM D5185m	56	50	25	0
Sulfur	ppm	ASTM D5185m	1336	2007	1638	1660
Visc @ 40°C	cSt	ASTM D445	35.3	28.8	26.3	26.2

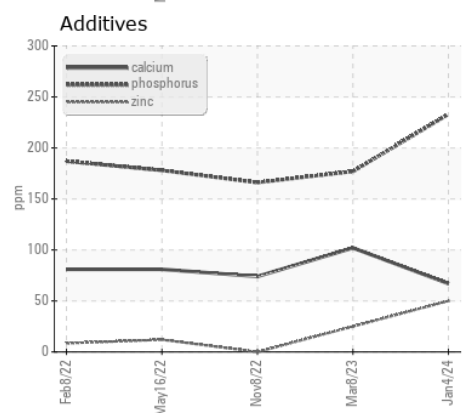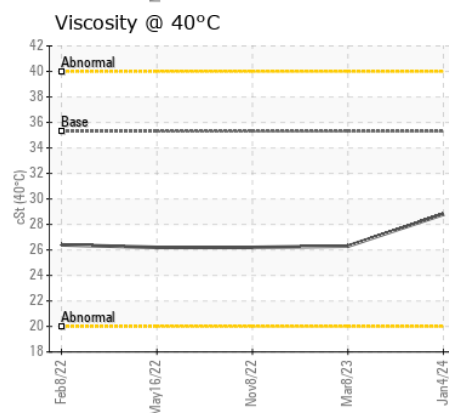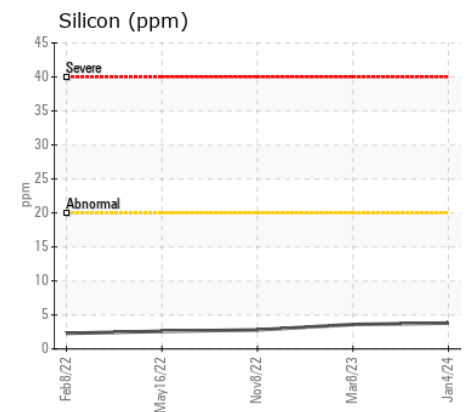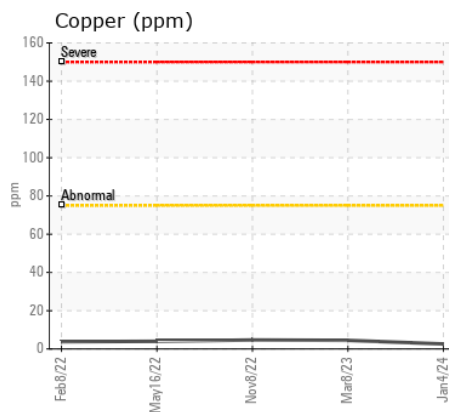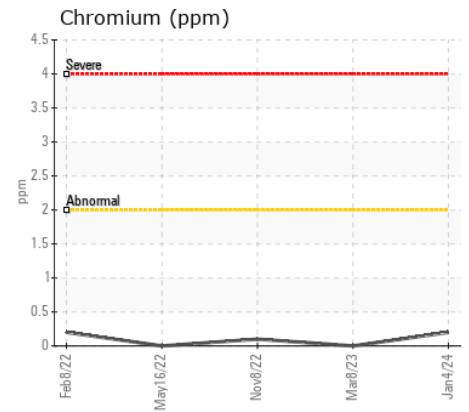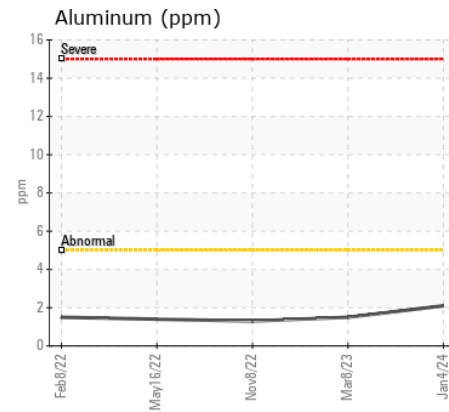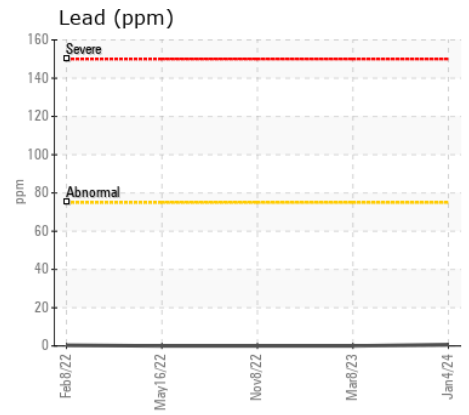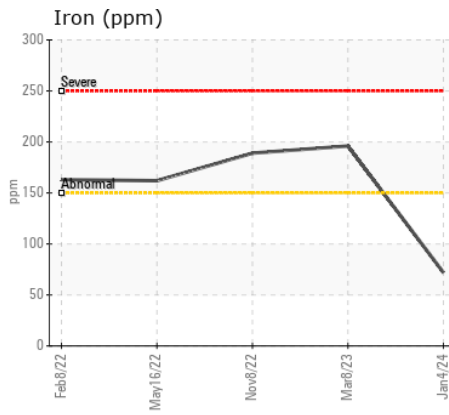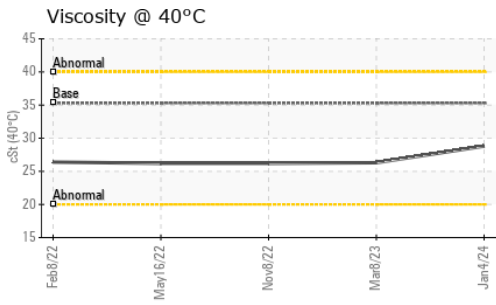

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP438019 **Received** : 08 Jan 2024
Lab Number : 06054458 **Diagnosed** : 09 Jan 2024
Unique Number : 10820407 **Diagnostician** : Wes Davis
Test Package : MOB 1

WHITAKER CONTRACTING
 692 CONVICT CAMP RD
 GUNTERSVILLE, AL
 US 35976
 Contact: BROTHER WHITAKER
 BrotherWhitaker@whitaker-contracting.com
 T: (256)298-3905
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)