



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
33704
Component
Diesel Engine
Fluid
CHEVRON (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0881504	WC0855544	WC0812996
Sample Date		Client Info		21 Dec 2023	13 Sep 2023	23 Jun 2023
Machine Age	mls	Client Info		195924	113207	87385
Oil Age	mls	Client Info		25000	25000	25000
Filter Age	mls	Client Info		25000	25000	25000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	15	16
Chromium	ppm	ASTM D5185m	>20	2	2	2
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	3	4	4
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	15	39	41
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	8	5
Potassium	ppm	ASTM D5185m	>20	3	8	13
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.1	9.2	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	21.0	22.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m		3	0	1
Barium	ppm	ASTM D5185m		0	3	<1
Molybdenum	ppm	ASTM D5185m		65	64	62
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		1091	952	997
Calcium	ppm	ASTM D5185m		1174	1097	1262
Phosphorus	ppm	ASTM D5185m		1211	921	984
Zinc	ppm	ASTM D5185m		1465	1169	1309
Sulfur	ppm	ASTM D5185m		3176	2367	3146
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.0	17.2	18.4
Base Number (BN)	mg KOH/g	ASTM D2896		8.1	7.9	8.5
Visc @ 100°C	cSt	ASTM D445		13.7	14.0	13.5

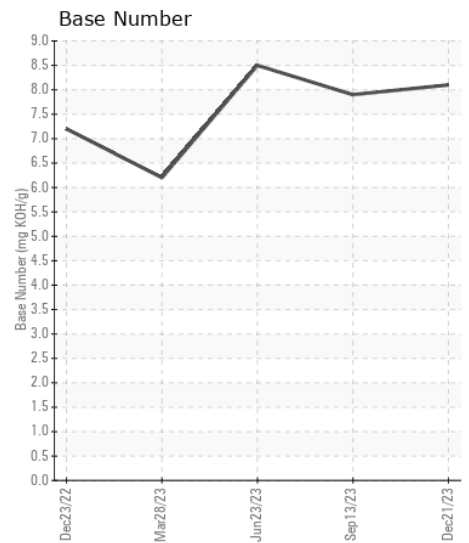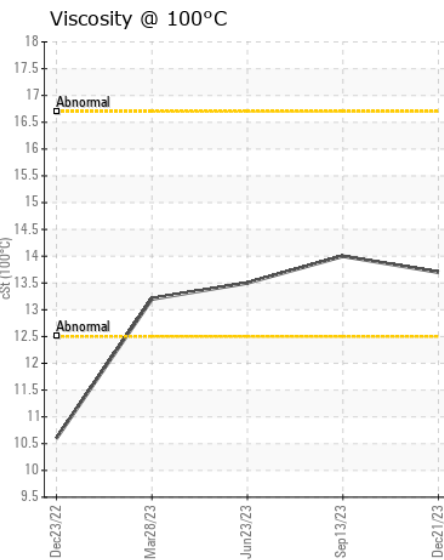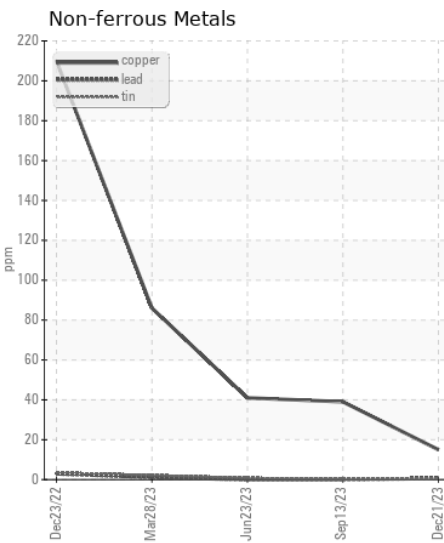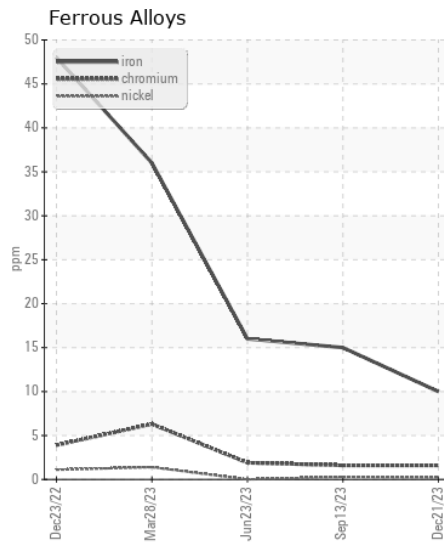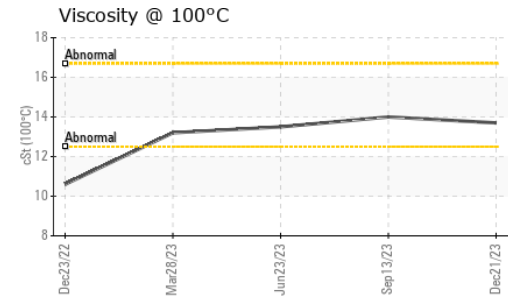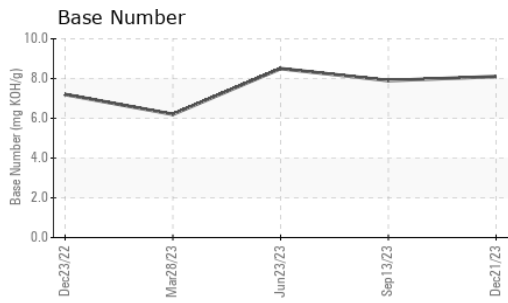

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0881504 **Received** : 08 Jan 2024
Lab Number : 06054570 **Diagnosed** : 09 Jan 2024
Unique Number : 10820519 **Diagnostician** : Wes Davis
Test Package : FLEET

SALEM NATIONALEASE CORPORATION
 198 PARK PLAZA DRIVE
 WINSTON SALEM, NC
 US 27105
 Contact: Audrey Hopkins
 Audrey.Hopkins@salemcorp.com
 T: (336)767-9642
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)