



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
74
 Component
Diesel Engine
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLY0001827	TLY0001844	---
Sample Date		Client Info		30 Dec 2023	08 Aug 2023	---
Machine Age	mls	Client Info		139128	116623	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	7	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>40	1	<1	---
Copper	ppm	ASTM D5185m	>330	3	<1	---
Tin	ppm	ASTM D5185m	>15	2	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	6	---
Potassium	ppm	ASTM D5185m	>20	4	5	---
Fuel	%	ASTM D3524	>5	0.3	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	10.4	6.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	20.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	---
Boron	ppm	ASTM D5185m		18	45	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		61	62	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		601	518	---
Calcium	ppm	ASTM D5185m		1597	1313	---
Phosphorus	ppm	ASTM D5185m		815	727	---
Zinc	ppm	ASTM D5185m		1034	885	---
Sulfur	ppm	ASTM D5185m		2657	2648	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.3	18.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.6	8.2	---
Visc @ 100°C	cSt	ASTM D445		11.0	11.0	---

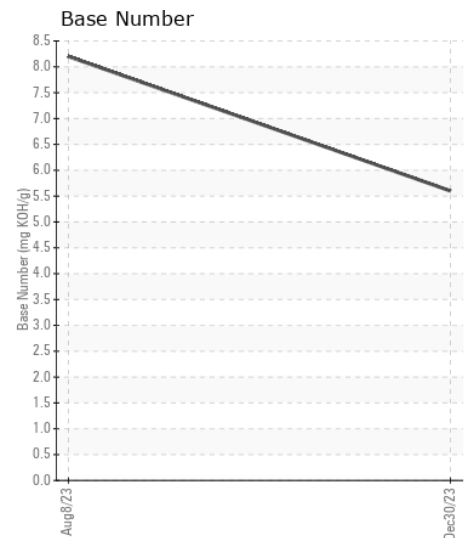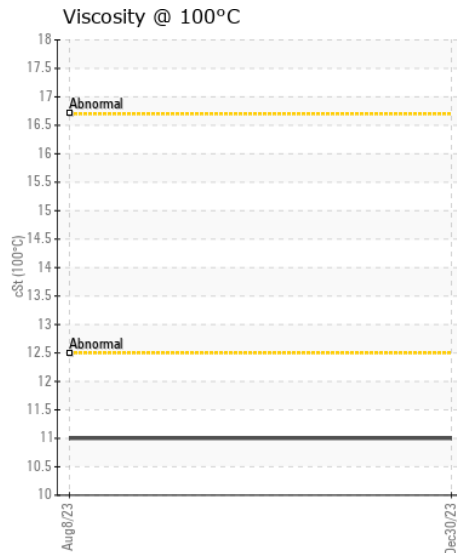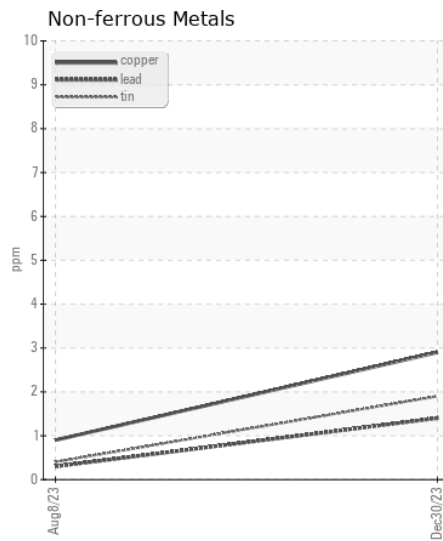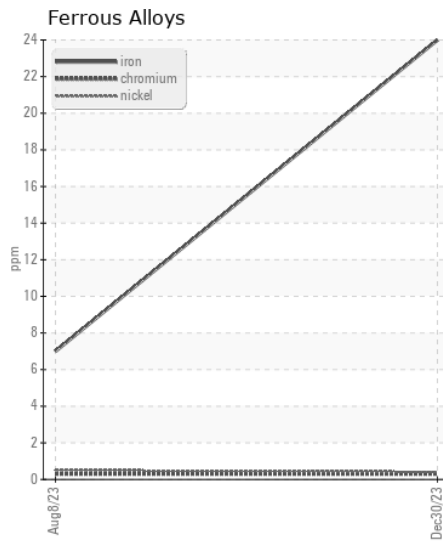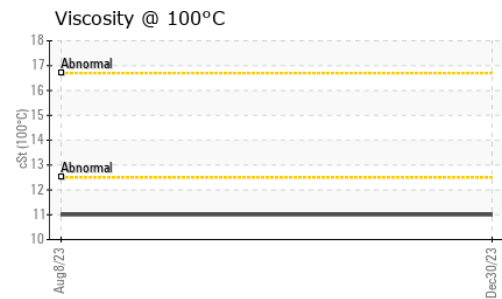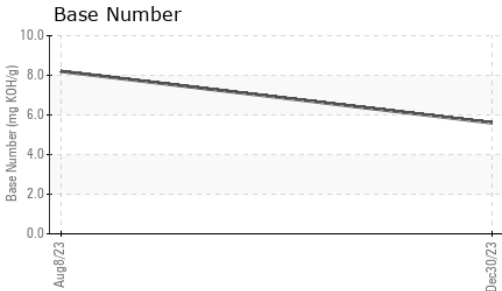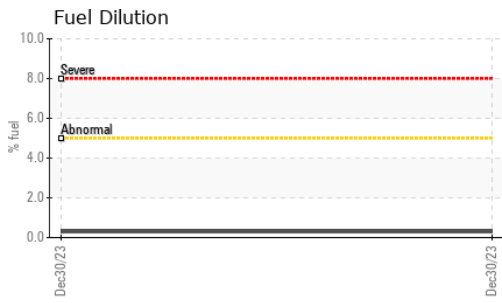

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLY0001827 **Received** : 08 Jan 2024
Lab Number : 06054678 **Diagnosed** : 12 Jan 2024
Unique Number : 10820627 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

COCKEYS ENTERPRISES
 3300 TRANSWAY RD
 HALETHORP, MD
 US 21227
 Contact: FRANK ROLNIAK
 frank.rolniak@cockeys.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: