



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[ROBBIE TREXLER]**  
 Machine Id  
**JOHN DEERE 948LII F714192**  
 Component  
**Hydraulic System**  
 Fluid  
**JD (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0164592</b>	JR0145633	---
Sample Date		Client Info		<b>05 Jan 2024</b>	29 Mar 2023	---
Machine Age	hrs	Client Info		<b>1316</b>	492	---
Oil Age	hrs	Client Info		<b>1316</b>	0	---
Filter Age	hrs	Client Info		<b>1316</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>18</b>	13	---
Iron	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>75	<b>1</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>2</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>706</b>	848	---
Particles >6µm		ASTM D7647	>1300	<b>214</b>	264	---
Particles >14µm		ASTM D7647	>160	<b>28</b>	22	---
Particles >21µm		ASTM D7647	>40	<b>10</b>	5	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	1	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/15/12</b>	17/15/12	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	1	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Calcium	ppm	ASTM D5185m		<b>96</b>	98	---
Phosphorus	ppm	ASTM D5185m		<b>710</b>	690	---
Zinc	ppm	ASTM D5185m		<b>939</b>	937	---
Sulfur	ppm	ASTM D5185m		<b>1855</b>	2136	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.57</b>	0.76	---
Visc @ 40°C	cSt	ASTM D445		<b>58.4</b>	58.3	---

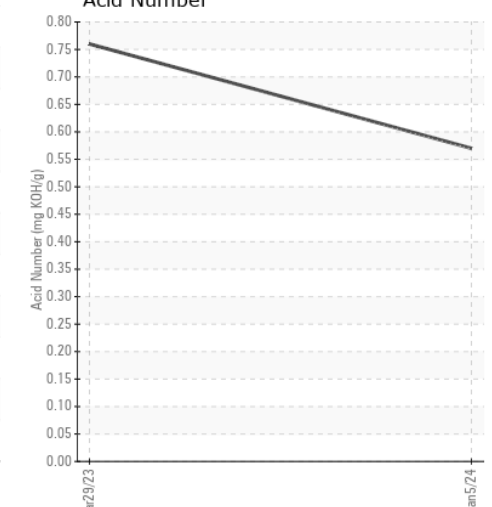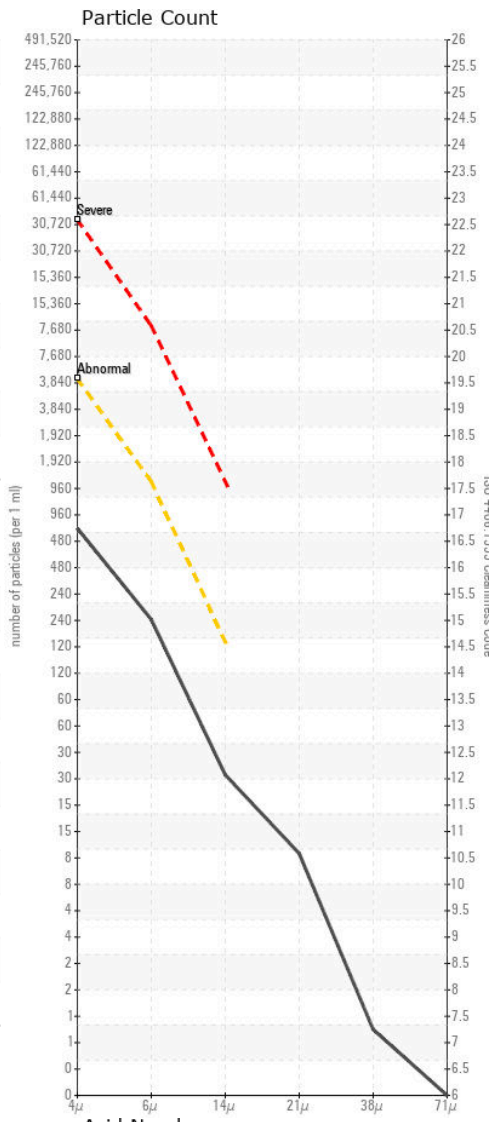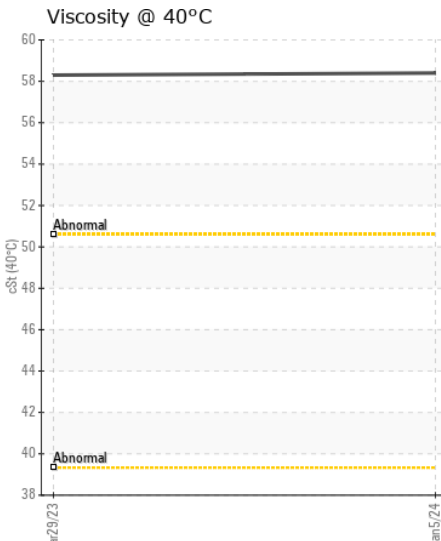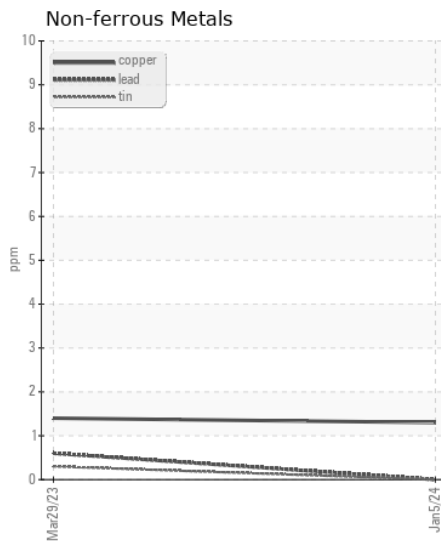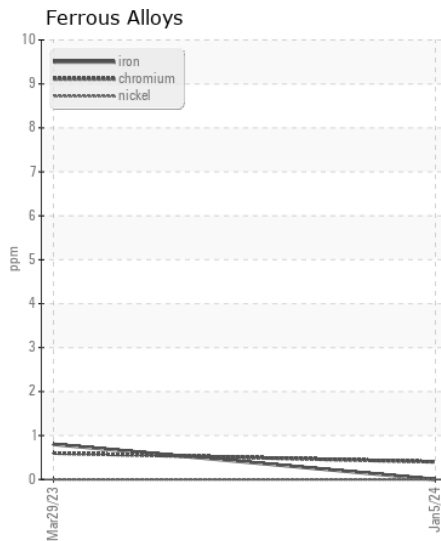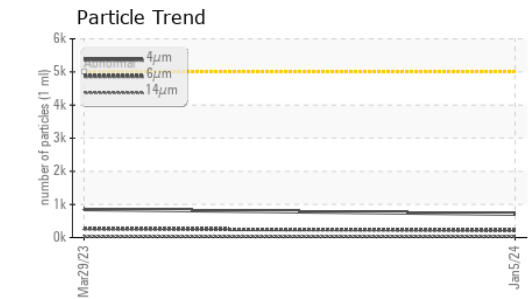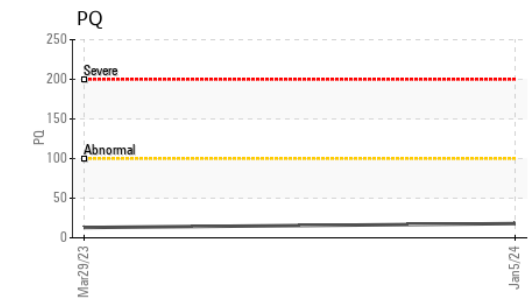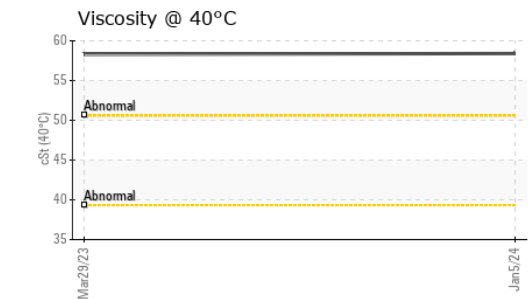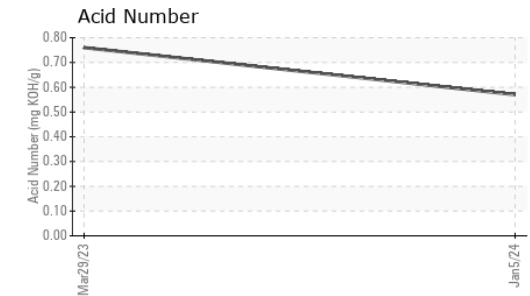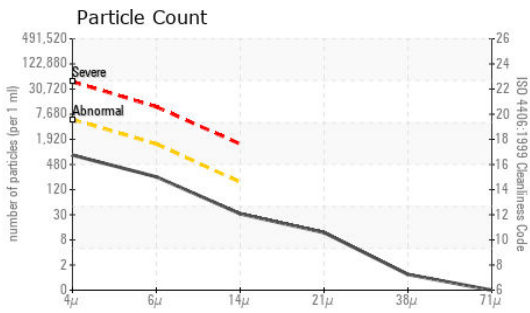

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0164592 **Received** : 08 Jan 2024  
**Lab Number** : 06054739 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10820688 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - MOUNT GILEAD**  
 305 NORTH MAIN STREET  
 MOUNT GILEAD, NC  
 US 27306  
 Contact: TIM ELSWORTH  
 telsworth@jamesriverequipment.com  
 T: (910)439-5653  
 F: (910)439-4568