



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH30M 121854-1253**  
Component  
**Front Right Wheel Hub**  
Fluid  
**CHEVRON DELO GEAR ESI OIL 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0272749</b>	LH0264394	LH0220809
Sample Date		Client Info		<b>02 Jan 2024</b>	04 Aug 2023	05 Dec 2022
Machine Age	hrs	Client Info		<b>6976</b>	6000	3974
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>450	<b>137</b>	161	98
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	1	3
Lead	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>75	<b>3</b>	4	3
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	<b>4</b>	5	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	6	4
Boron	ppm	ASTM D5185m	15	<b>2</b>	4	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>2</b>	1	1
Magnesium	ppm	ASTM D5185m	0	<b>5</b>	7	9
Calcium	ppm	ASTM D5185m	5	<b>40</b>	48	54
Phosphorus	ppm	ASTM D5185m	600	<b>763</b>	765	631
Zinc	ppm	ASTM D5185m	0	<b>2</b>	9	11
Sulfur	ppm	ASTM D5185m	22000	<b>24545</b>	27519	25056
Visc @ 40°C	cSt	ASTM D445	140	<b>127</b>	131	137

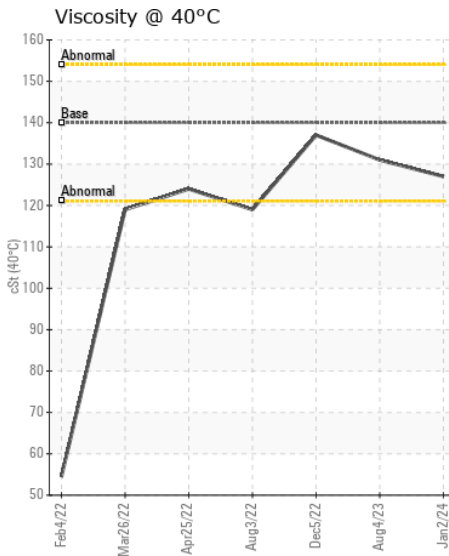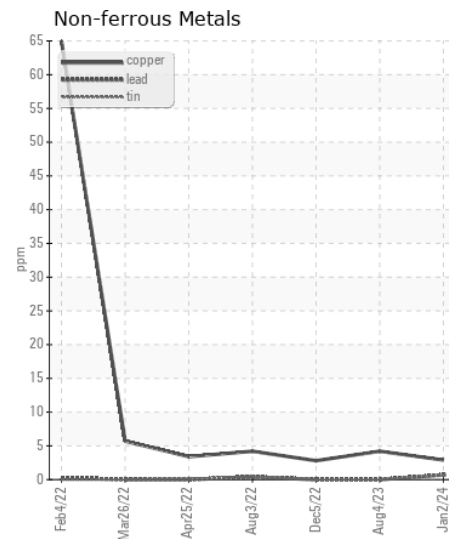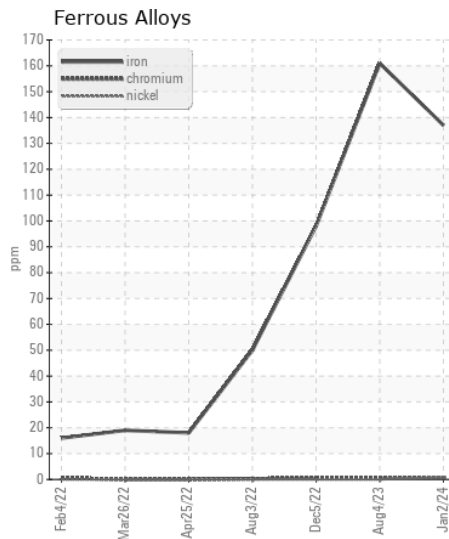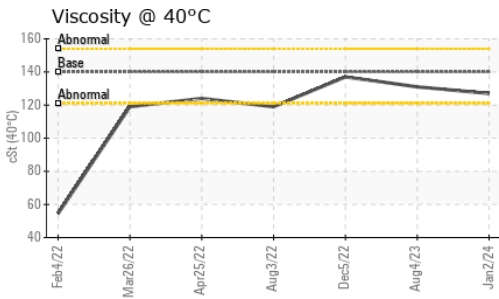

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LH0272749 **Received** : 08 Jan 2024  
**Lab Number** : 06055082 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821031 **Diagnostician** : Sean Felton  
**Test Package** : CONST

**AMERICAN STATE EQUIPMENT CO.**  
 2400 NORTH 14TH AVENUE  
 WAUSAU, WI  
 US 54401  
 Contact: CHRIS BARTNIK  
 cbartnik@amstate.com  
 T: (715)675-6900  
 F: (715)675-9748

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)