



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area

[16W15164]

Machine Id

JOHN DEERE 853M 1T0853MXCPL446298

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 16W15164)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196279	---	---
Sample Date		Client Info		22 Dec 2023	---	---
Machine Age	hrs	Client Info		511	---	---
Oil Age	hrs	Client Info		511	---	---
Filter Age	hrs	Client Info		511	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

The copper level is abnormal. Cylinder, crank, or cam shaft wear is indicated. Exhaust valve wear is indicated. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

Iron	ppm	ASTM D5185m	>51	▲ 52	---	---
Chromium	ppm	ASTM D5185m	>11	1	---	---
Nickel	ppm	ASTM D5185m	>5	▲ 25	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	9	---	---
Lead	ppm	ASTM D5185m	>26	3	---	---
Copper	ppm	ASTM D5185m	>26	▲ 158	---	---
Tin	ppm	ASTM D5185m	>4	3	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	13	---	---
Potassium	ppm	ASTM D5185m	>20	24	---	---
Fuel	%	ASTM D3524	>2.1	0.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	2	---	---
Boron	ppm	ASTM D5185m		112	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		229	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		731	---	---
Calcium	ppm	ASTM D5185m		1678	---	---
Phosphorus	ppm	ASTM D5185m		779	---	---
Zinc	ppm	ASTM D5185m		1072	---	---
Sulfur	ppm	ASTM D5185m		2885	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.4	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	---	---

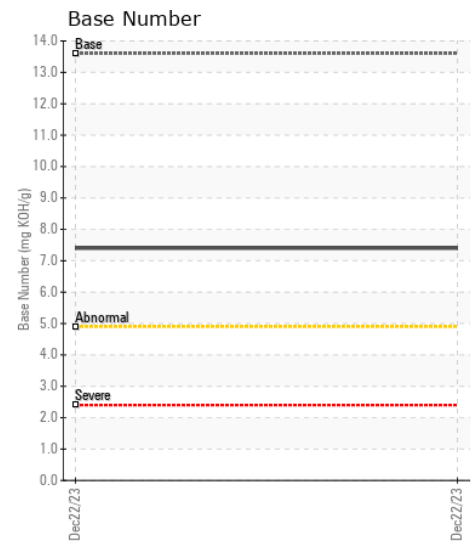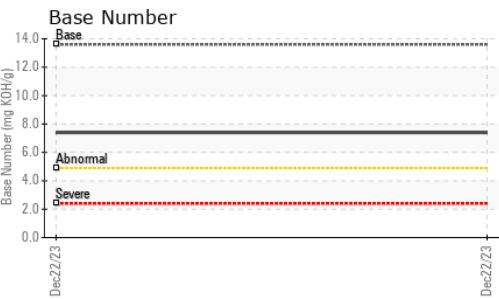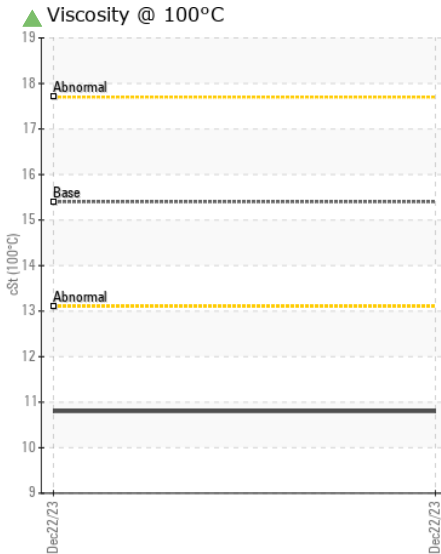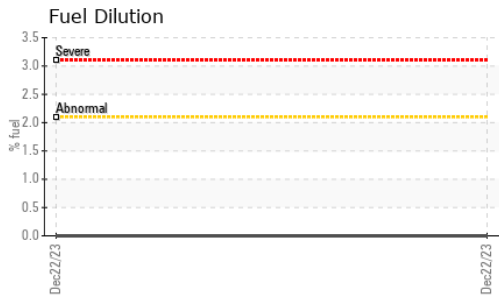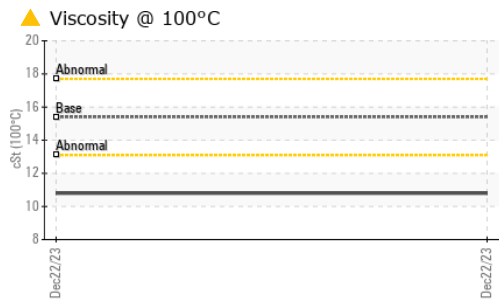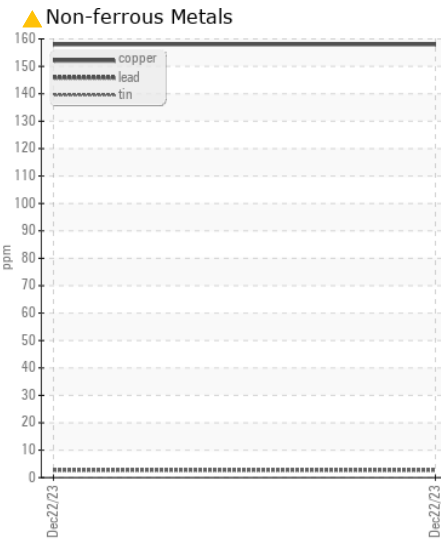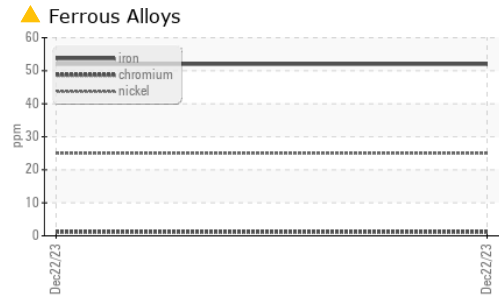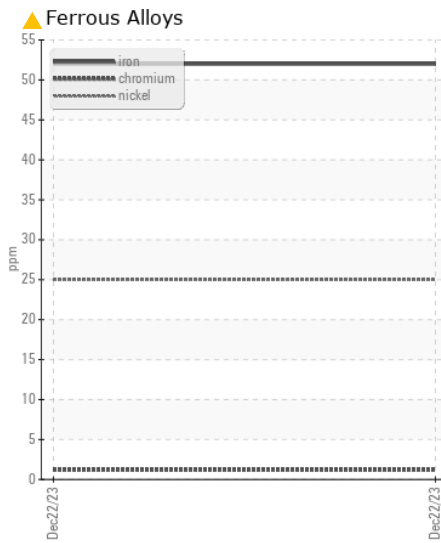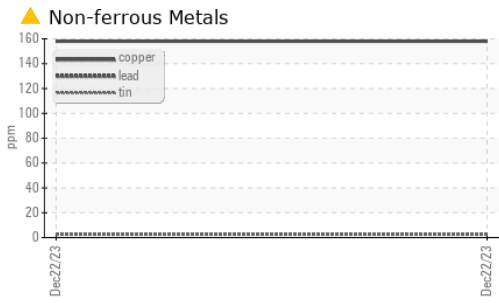

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196279 **Received** : 09 Jan 2024
Lab Number : 06055177 **Diagnosed** : 11 Jan 2024
Unique Number : 10821126 **Diagnostician** : Doug Bogart
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432