



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 550K-II 1T0550KKKNF428224**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0194390</b>	JR0182593	---
Sample Date		Client Info		<b>08 Jan 2024</b>	29 Aug 2023	---
Machine Age	hrs	Client Info		<b>1559</b>	1094	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>18</b>	47	---
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	2	---
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	8	---
Lead	ppm	ASTM D5185m	>26	<b>13</b>	▲ 133	---
Copper	ppm	ASTM D5185m	>26	<b>11</b>	▲ 89	---
Tin	ppm	ASTM D5185m	>4	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>10</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	7	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	12.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	27.1	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>0</b>	6	---
Boron	ppm	ASTM D5185m		<b>212</b>	52	---
Barium	ppm	ASTM D5185m		<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m		<b>251</b>	149	---
Manganese	ppm	ASTM D5185m		<b>2</b>	5	---
Magnesium	ppm	ASTM D5185m		<b>836</b>	514	---
Calcium	ppm	ASTM D5185m		<b>1859</b>	2098	---
Phosphorus	ppm	ASTM D5185m		<b>983</b>	940	---
Zinc	ppm	ASTM D5185m		<b>1301</b>	1251	---
Sulfur	ppm	ASTM D5185m		<b>4101</b>	4040	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.2</b>	22.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.1</b>	6.6	---
Visc @ 100°C	cSt	ASTM D445		<b>13.6</b>	13.0	---

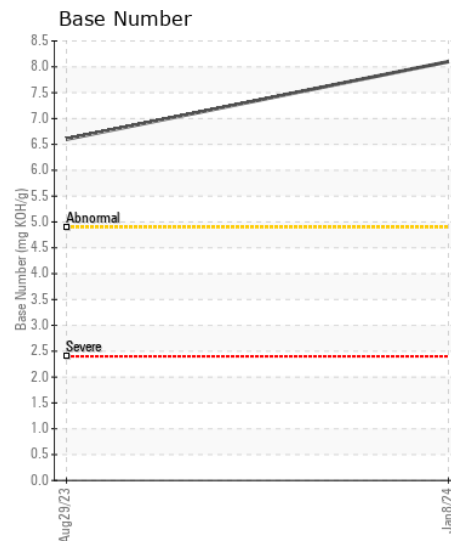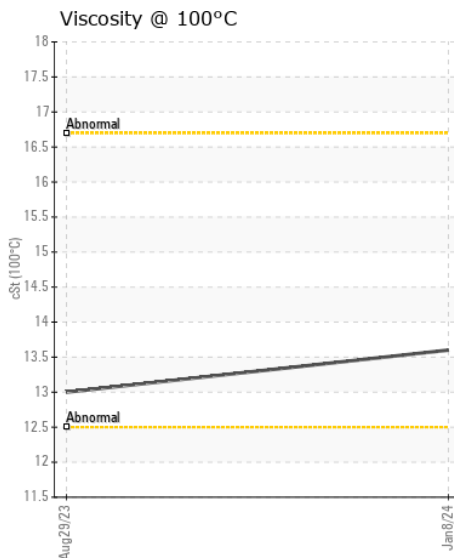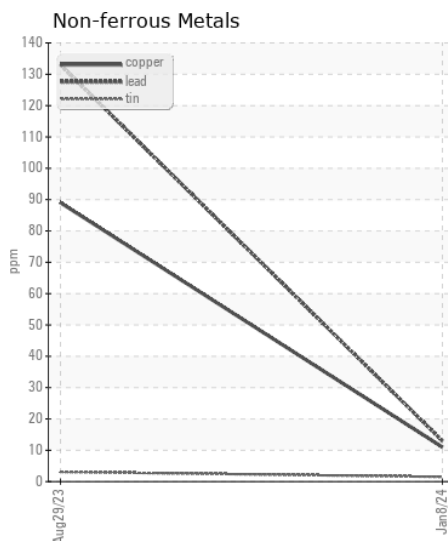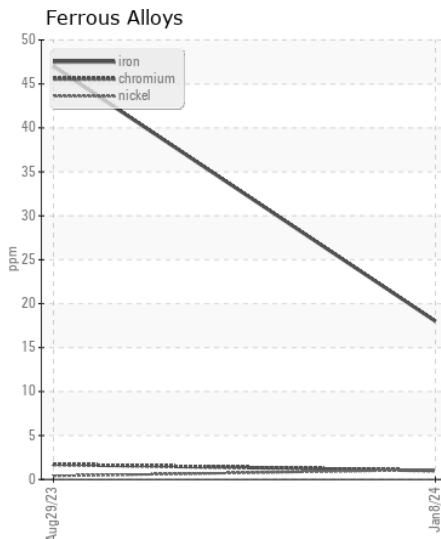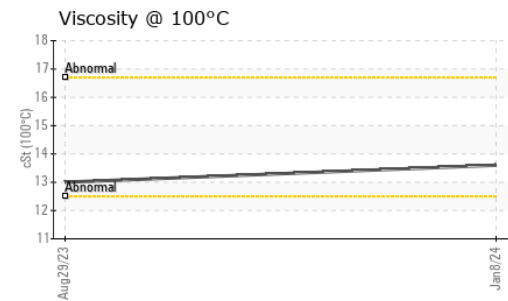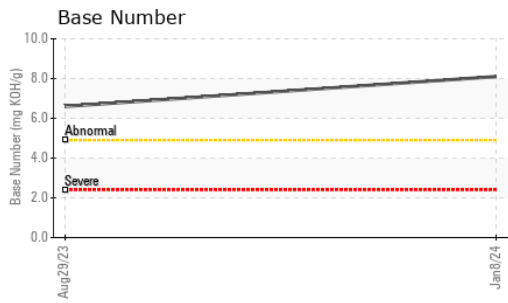

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0194390 **Received** : 09 Jan 2024  
**Lab Number** : 06055179 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821128 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409

Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556