



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 437E 1T0437EDKNF413536

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0179664 | JR0165568 | JR0147069 |
| Sample Date | | Client Info | | 05 Jan 2024 | 21 Jul 2023 | 10 Mar 2023 |
| Machine Age | hrs | Client Info | | 2476 | 1966 | 1490 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >51 | 31 | 25 | 39 |
| Chromium | ppm | ASTM D5185m | >11 | 1 | <1 | 1 |
| Nickel | ppm | ASTM D5185m | >5 | 5 | <1 | 1 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >31 | 4 | 2 | 5 |
| Lead | ppm | ASTM D5185m | >26 | 1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >26 | 2 | 3 | 10 |
| Tin | ppm | ASTM D5185m | >4 | 1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >22 | 10 | 6 | 8 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 2 | 5 |
| Fuel | | WC Method | >2.1 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.21 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.5 | 0.4 | 0.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.1 | 10.0 | 10.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 25.3 | 24.1 | 24.3 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | >31 | 0 | 4 | 2 |
| Boron | ppm | ASTM D5185m | | 131 | 122 | 134 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 262 | 250 | 246 |
| Manganese | ppm | ASTM D5185m | | 1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 872 | 865 | 779 |
| Calcium | ppm | ASTM D5185m | | 1498 | 1552 | 1534 |
| Phosphorus | ppm | ASTM D5185m | | 841 | 908 | 867 |
| Zinc | ppm | ASTM D5185m | | 1134 | 1126 | 1093 |
| Sulfur | ppm | ASTM D5185m | | 3225 | 3522 | 3122 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 20.0 | 19.0 | 19.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 7.6 | 7.8 | 8.7 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.8 | 13.3 | 13.6 |

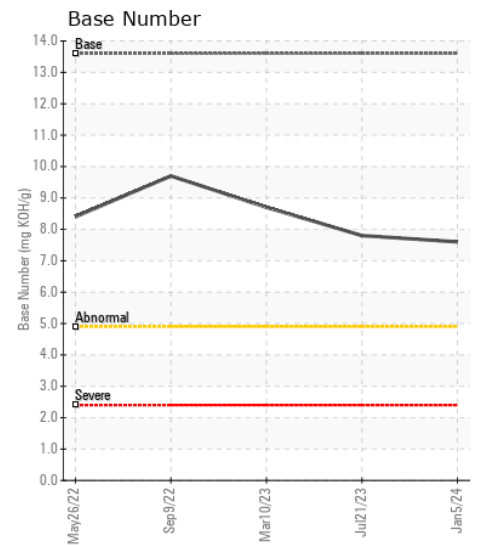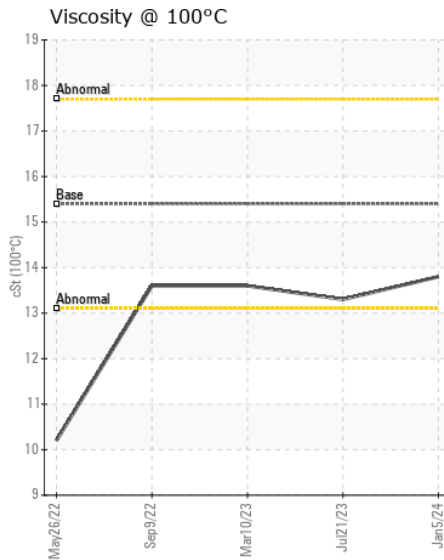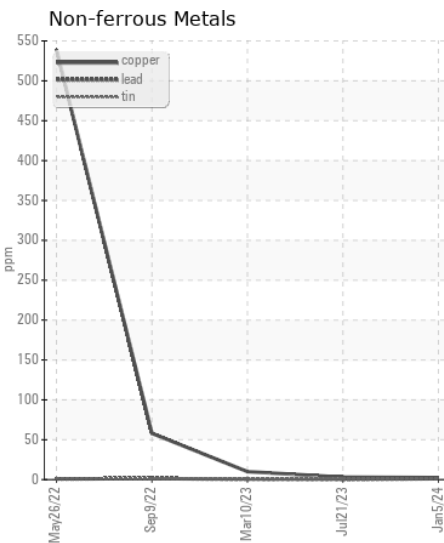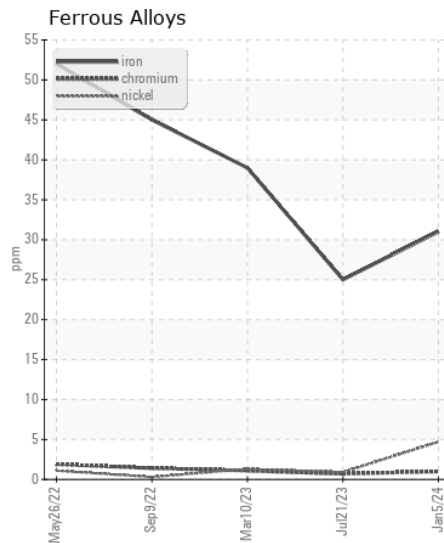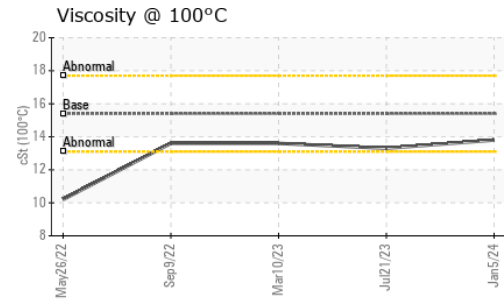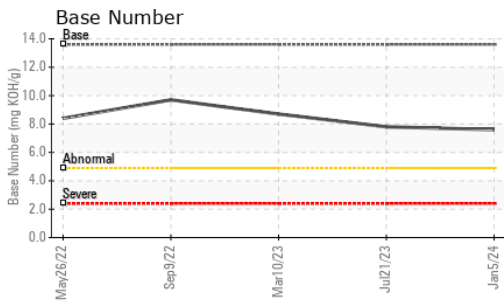

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0179664 **Received** : 09 Jan 2024
Lab Number : 06055189 **Diagnosed** : 10 Jan 2024
Unique Number : 10821138 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005

Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com

T: (804)798-6001
 F: (804)798-0292