



Machine Id
2279
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (50 QTS)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0092740	GFL0086419	WC0647880
Sample Date		Client Info		27 Dec 2023	28 Jun 2023	20 Sep 2022
Machine Age	mls	Client Info		482485	482485	0
Oil Age	mls	Client Info		732	742	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				SEVERE	SEVERE	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	61	▲ 134	15
Chromium	ppm	ASTM D5185m	>20	1	2	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	<1	29
Lead	ppm	ASTM D5185m	>40	6	20	0
Copper	ppm	ASTM D5185m	>330	6	14	39
Tin	ppm	ASTM D5185m	>15	2	3	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>25	4	5	7
Potassium	ppm	ASTM D5185m	>20	2	2	77
Fuel	%	ASTM D3524	>3.0	7.7	8.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	1.3	3.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.3	12.1	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	28.4	22.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		0	6	2
Boron	ppm	ASTM D5185m	0	3	3	44
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	60	52	52	54
Manganese	ppm	ASTM D5185m	0	1	1	<1
Magnesium	ppm	ASTM D5185m	1010	830	846	694
Calcium	ppm	ASTM D5185m	1070	1031	1071	1251
Phosphorus	ppm	ASTM D5185m	1150	804	818	714
Zinc	ppm	ASTM D5185m	1270	1102	1074	880
Sulfur	ppm	ASTM D5185m	2060	2763	2793	2822
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	23.1	19.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.7	4.1	10.3
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.1	▲ 11.8	13.0

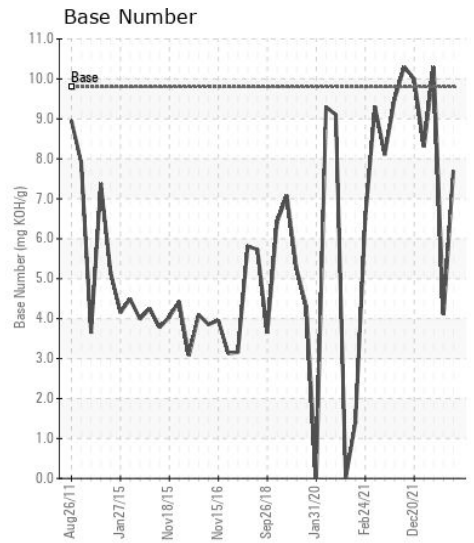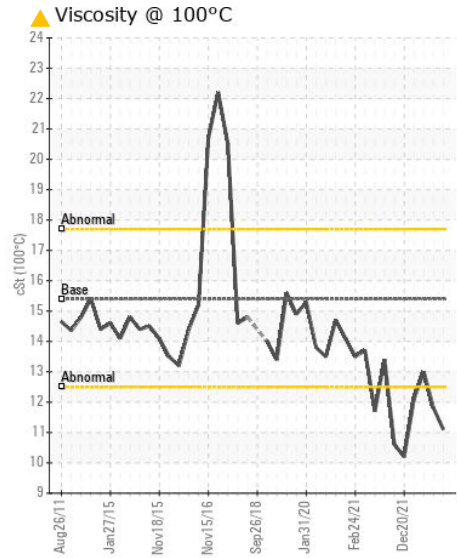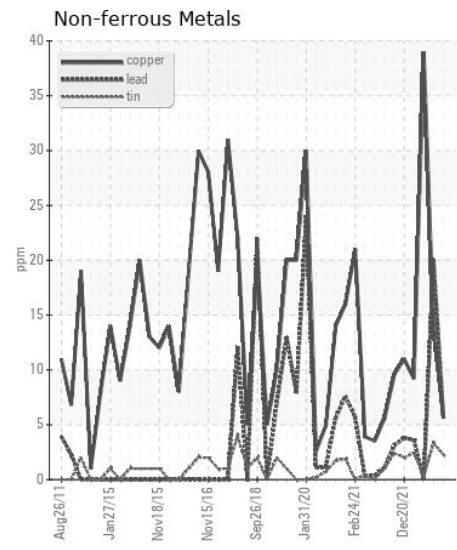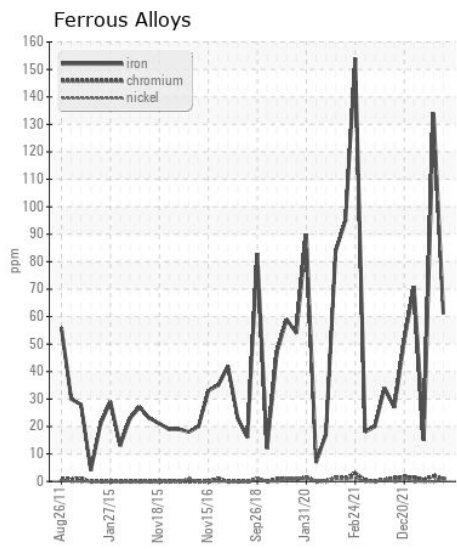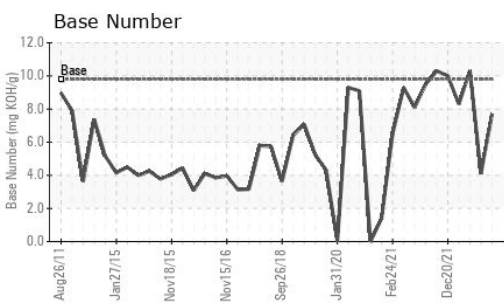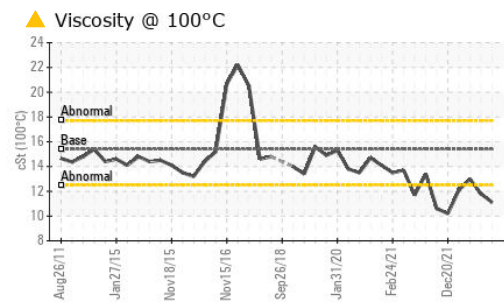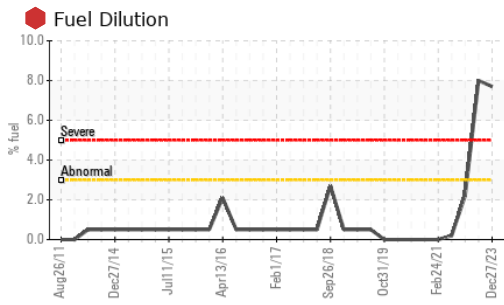

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092740 **Received** : 09 Jan 2024
Lab Number : 06055220 **Diagnosed** : 12 Jan 2024
Unique Number : 10821169 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 049 - Raleigh Acquisition
 3301 BENSON DR., SUITE 601
 Raleigh, NC
 US 27609
 Contact: Timothy Horton
 timothy.horton@gflenv.com
 T:
 F: (919)325-4040

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)