



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 117303
Component
Diesel Engine
Fluid
CHEVRON 15W40 (46 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0009887	RPL0003419	RPL0003373
Sample Date		Client Info		09 Nov 2023	07 Feb 2023	30 Sep 2022
Machine Age	mls	Client Info		287946	287946	0
Oil Age	mls	Client Info		287946	15000	272404
Filter Age	mls	Client Info		0	15000	272404
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	14	7	11
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	2	3
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	3	1	2
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	7	8
Potassium	ppm	ASTM D5185m	>20	3	<1	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.4	7.8	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.7	21.7	24.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	0	<1	0
Boron	ppm	ASTM D5185m		184	341	195
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		87	84	94
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		397	382	407
Calcium	ppm	ASTM D5185m		1421	1419	1477
Phosphorus	ppm	ASTM D5185m		891	993	1089
Zinc	ppm	ASTM D5185m		1310	1224	1335
Sulfur	ppm	ASTM D5185m		3032	3659	3895
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.1	15.3	17.9
Base Number (BN)	mg KOH/g	ASTM D2896		6.3	6.9	7.3
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	14.0	14.3

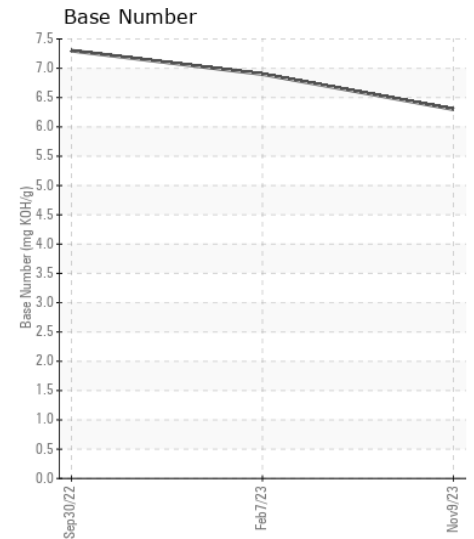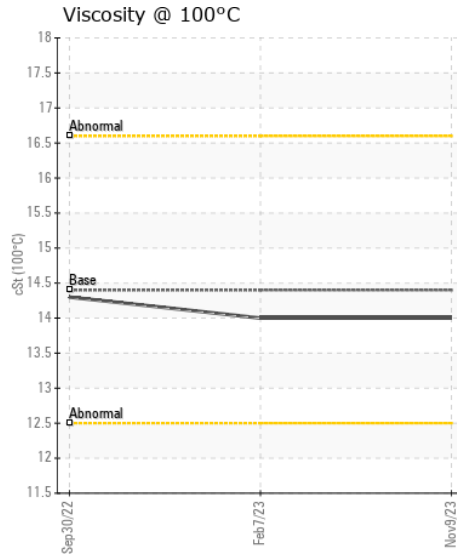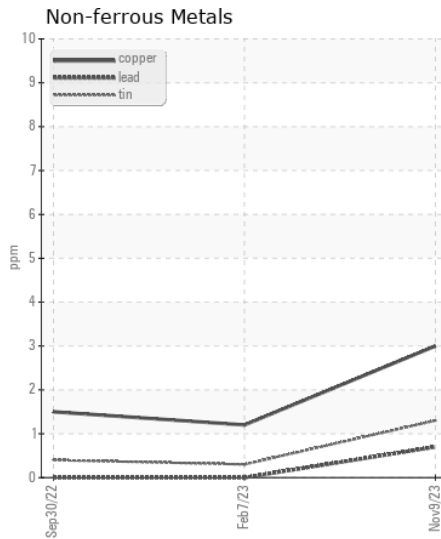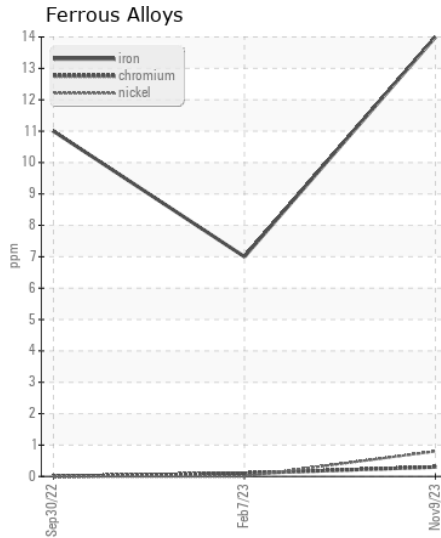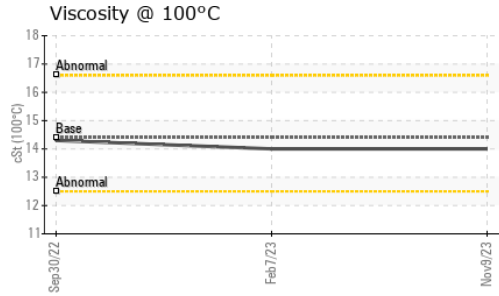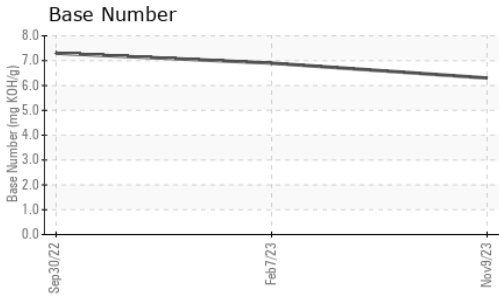

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0009887 **Received** : 09 Jan 2024
Lab Number : 06055253 **Diagnosed** : 10 Jan 2024
Unique Number : 10821202 **Diagnostician** : Wes Davis
Test Package : FLEET

RTL PACLEASE - 7019 - Birmingham
 601 Republic Circle
 Birmingham, AL
 US 35214
 Contact: Johnathan King
 KingJ1@RushEnterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)