



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**CUMMINS 10854**  
 Component  
**Front Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0109061</b>	---	---
Sample Date		Client Info		<b>05 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3953</b>	---	---
Oil Age	hrs	Client Info		<b>3953</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>16</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**








Fuel content negligible. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>10</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Fuel	%	ASTM D3524	>3.0	<b>1.7</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>6	<b>0.6</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Boron	ppm	ASTM D5185m		<b>11</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>53</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>604</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1000</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>696</b>	---	---
Zinc	ppm	ASTM D5185m		<b>942</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2422</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.5</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>9.7</b>	---	---

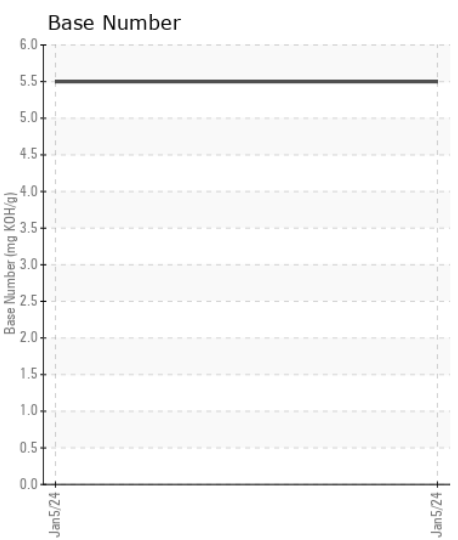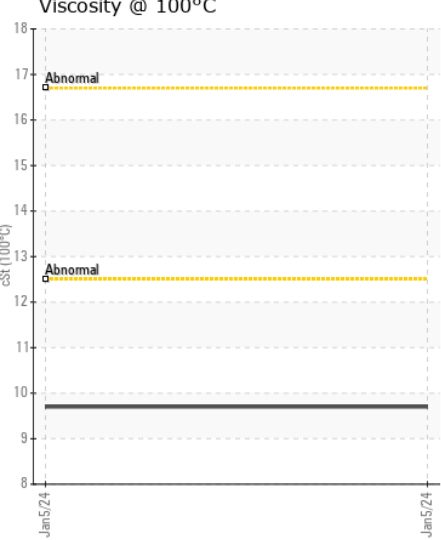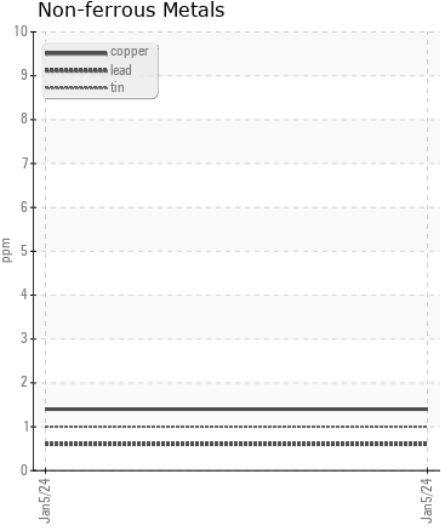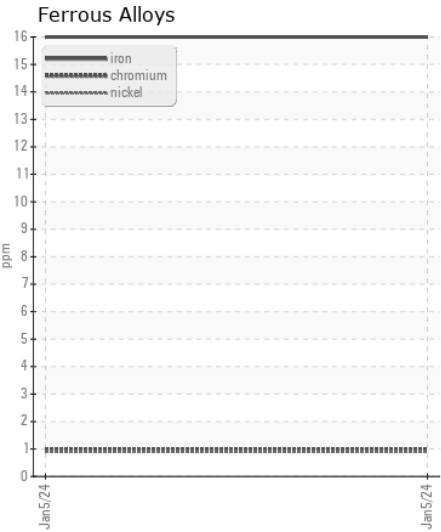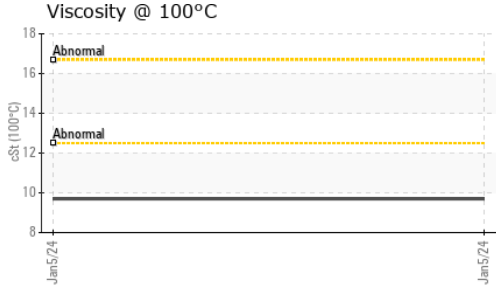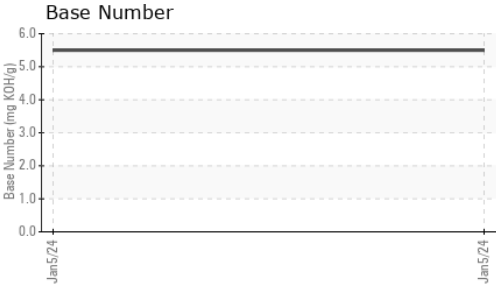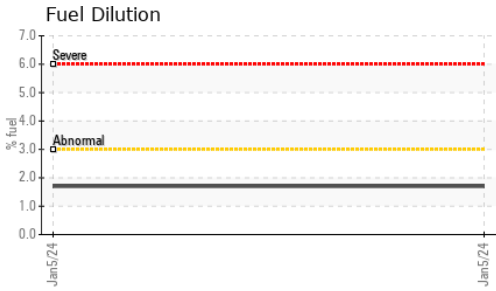

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109061 **Received** : 09 Jan 2024  
**Lab Number** : 06055270 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10821219 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 009 - Fairburn**  
 6905 Roosevelt Hwy  
 Fairburn, GA  
 US 30213  
 Contact: Eric Jones  
 erjones@gflenv.com  
 T: (678)630-9927  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)