



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CAIRO (S/N TSJ00164)
Component
Starboard Main Engine
Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (201 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0062438	MW0062367	MW0047414
Sample Date		Client Info		27 Dec 2023	20 Nov 2023	30 Oct 2023
Machine Age	hrs	Client Info		83619	82812	82375
Oil Age	hrs	Client Info		635	773	338
Filter Age	hrs	Client Info		635	773	338
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	6	2	4
Chromium	ppm	ASTM D5185m	>8	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	17	15	17
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>15	2	1	2
Lead	ppm	ASTM D5185m	>18	<1	0	<1
Copper	ppm	ASTM D5185m	>80	<1	0	<1
Tin	ppm	ASTM D5185m	>14	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	3	4
Potassium	ppm	ASTM D5185m	>20	4	2	4
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.7	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.3	8.0	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.0	18.8	18.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	0	2	0
Boron	ppm	ASTM D5185m		89	84	105
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		28	26	29
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		719	713	708
Calcium	ppm	ASTM D5185m		1506	1419	1483
Phosphorus	ppm	ASTM D5185m	1360	652	693	713
Zinc	ppm	ASTM D5185m	1480	814	784	788
Sulfur	ppm	ASTM D5185m		3218	2886	3177
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.7	12.5	12.4
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	8.1	8.3	8.4
Visc @ 100°C	cSt	ASTM D445	15.1	14.4	14.5	14.3

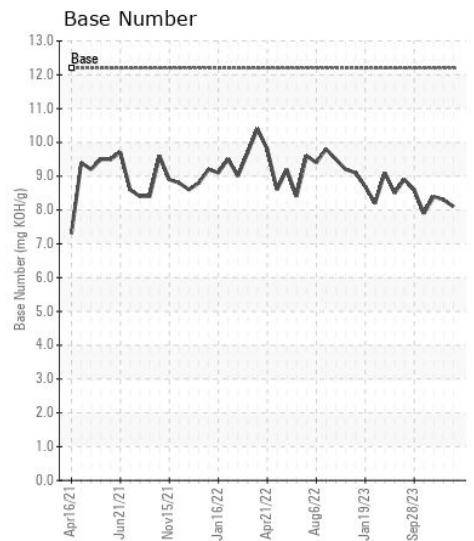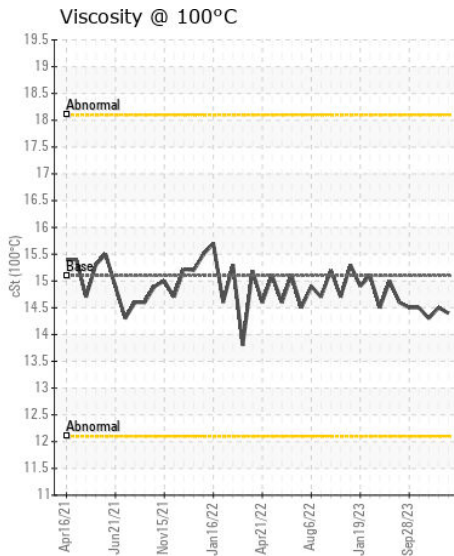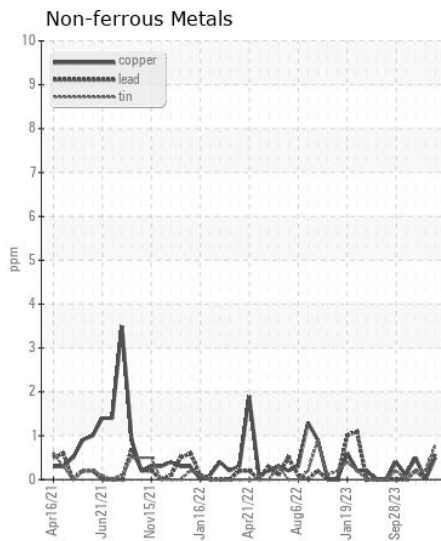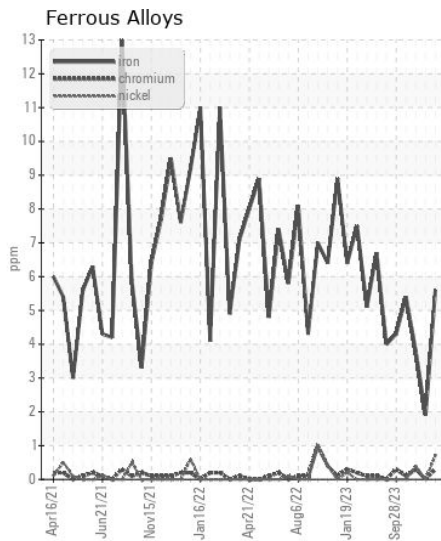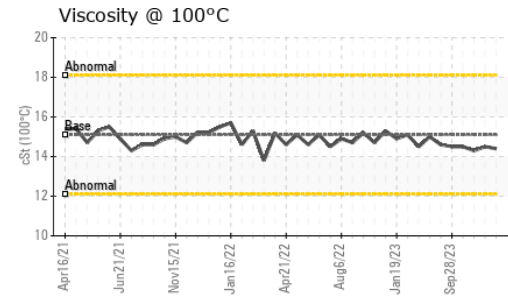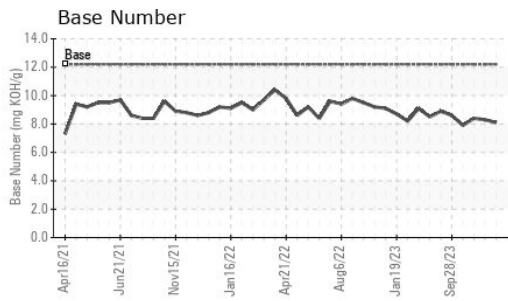

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0062438 **Received** : 09 Jan 2024
Lab Number : 06055273 **Diagnosed** : 10 Jan 2024
Unique Number : 10821222 **Diagnostician** : Jonathan Hester
Test Package : MAR 2

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargeacbl.com
 T:
 F: (812)288-1644

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)