



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
CAIRO (S/N TSJ00163)
Component
Port Main Engine
Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (245 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0062439 | MW0062368 | MW0047415 |
| Sample Date | | Client Info | | 27 Dec 2023 | 20 Nov 2023 | 30 Oct 2023 |
| Machine Age | hrs | Client Info | | 83595 | 82782 | 82375 |
| Oil Age | hrs | Client Info | | 1032 | 171 | 708 |
| Filter Age | hrs | Client Info | | 1032 | 171 | 708 |
| Oil Changed | | Client Info | | Changed | Changed | Not Changd |
| Filter Changed | | Client Info | | Changed | Changed | Not Changd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 7 | <1 | 6 |
| Chromium | ppm | ASTM D5185m | >8 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | 17 | 15 | 18 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | <1 | 2 |
| Lead | ppm | ASTM D5185m | >18 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >80 | <1 | 0 | <1 |
| Tin | ppm | ASTM D5185m | >14 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >20 | 4 | 3 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 3 | 4 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | | 1 | 0.4 | 0.8 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.7 | 7.2 | 8.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.5 | 18.2 | 19.2 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >75 | 0 | 2 | 0 |
| Boron | ppm | ASTM D5185m | | 89 | 88 | 98 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 29 | 25 | 30 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 738 | 702 | 724 |
| Calcium | ppm | ASTM D5185m | | 1547 | 1405 | 1542 |
| Phosphorus | ppm | ASTM D5185m | 1360 | 661 | 681 | 717 |
| Zinc | ppm | ASTM D5185m | 1480 | 831 | 783 | 812 |
| Sulfur | ppm | ASTM D5185m | | 3303 | 2900 | 3245 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 13.0 | 12.3 | 12.7 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 12.2 | 8.1 | 8.6 | 8.3 |
| Visc @ 100°C | cSt | ASTM D445 | 15.1 | 15.0 | 14.6 | 14.9 |

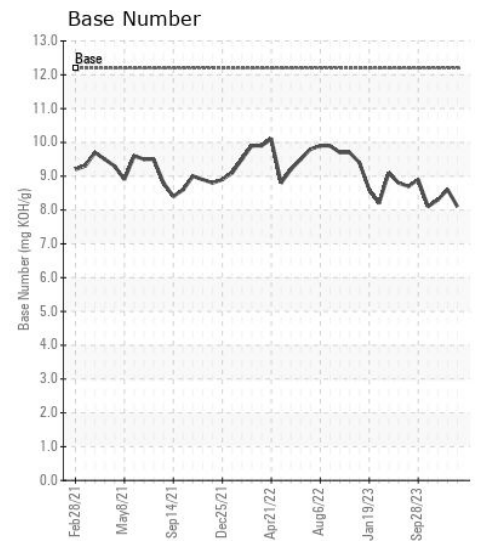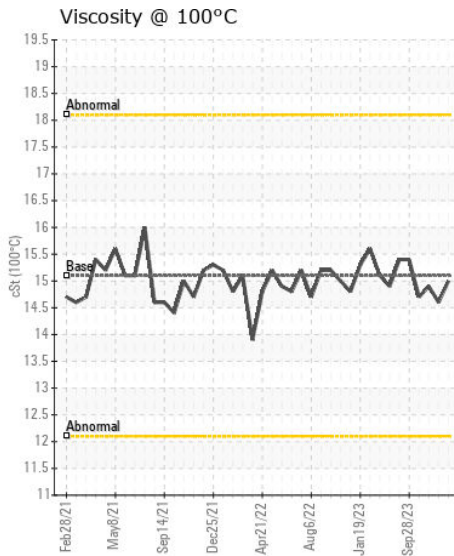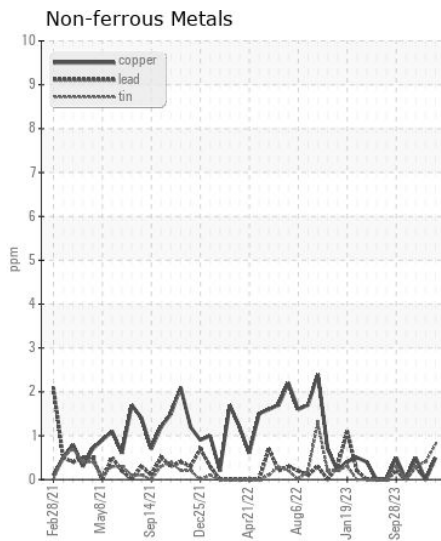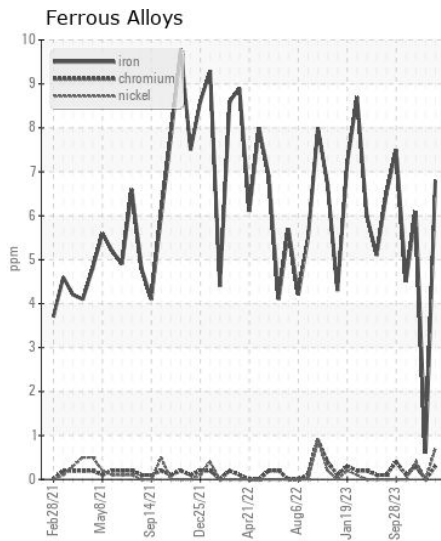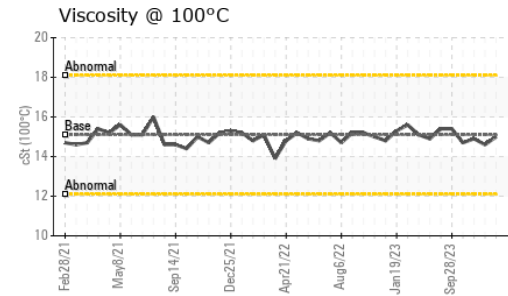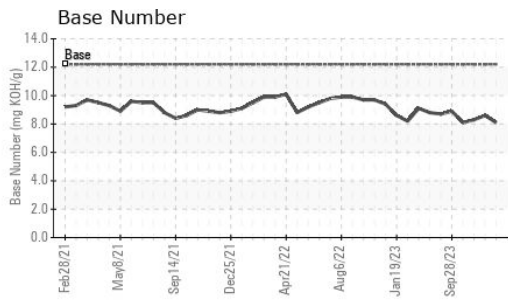

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0062439 **Received** : 09 Jan 2024
Lab Number : 06055274 **Diagnosed** : 10 Jan 2024
Unique Number : 10821223 **Diagnostician** : Jonathan Hester
Test Package : MAR 2

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargeacbl.com
 T:
 F: (812)288-1644

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)