



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL I4564

Component
Diesel Engine

Fluid
MOBIL DELVAC 1300 SUPER15W40 (22 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0012701	ILMFC27681	---
Sample Date		Client Info		02 Jan 2024	26 Jul 2019	---
Machine Age	mls	Client Info		136716	12628	---
Oil Age	mls	Client Info		14000	0	---
Filter Age	mls	Client Info		14000	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	67	61	---
Chromium	ppm	ASTM D5185m	>20	2	2	---
Nickel	ppm	ASTM D5185m	>2	1	<1	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	31	22	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	2	76	---
Tin	ppm	ASTM D5185m	>15	<1	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	36	---
Potassium	ppm	ASTM D5185m	>20	44	▲ 63	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	1.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	13.3	10	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.8	21.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	4	---
Boron	ppm	ASTM D5185m	0	31	48	---
Barium	ppm	ASTM D5185m	0	0	9	---
Molybdenum	ppm	ASTM D5185m	0	63	48	---
Manganese	ppm	ASTM D5185m		1	4	---
Magnesium	ppm	ASTM D5185m	0	569	594	---
Calcium	ppm	ASTM D5185m		1535	1472	---
Phosphorus	ppm	ASTM D5185m		719	827	---
Zinc	ppm	ASTM D5185m		921	1145	---
Sulfur	ppm	ASTM D5185m		2713	2574	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.6	18.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	6.3	8.8	---
Visc @ 100°C	cSt	ASTM D445	14	12.7	13.4	---

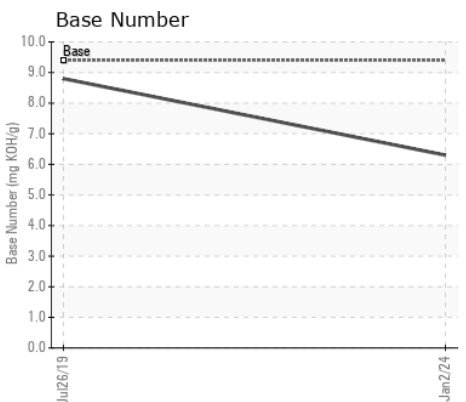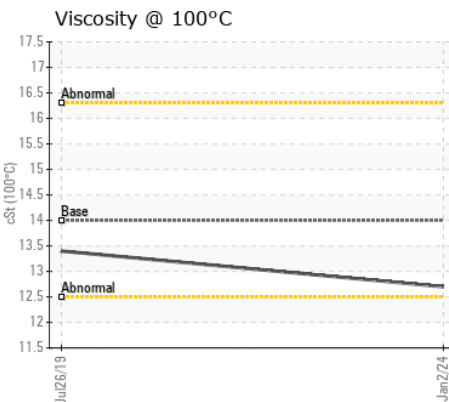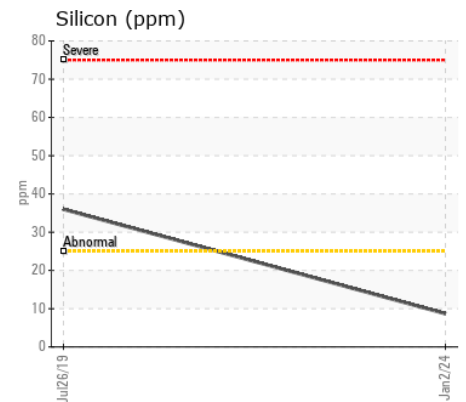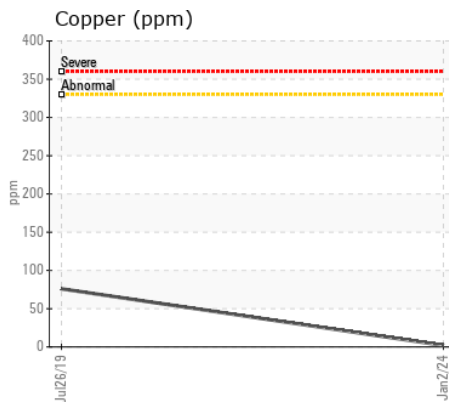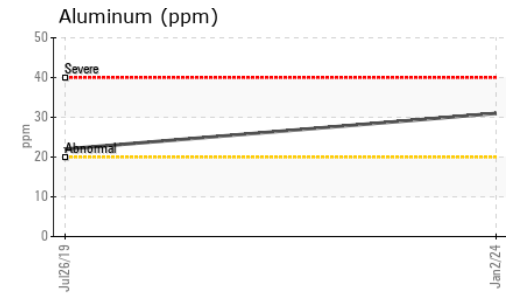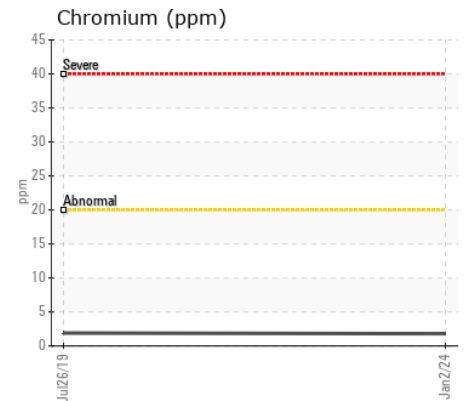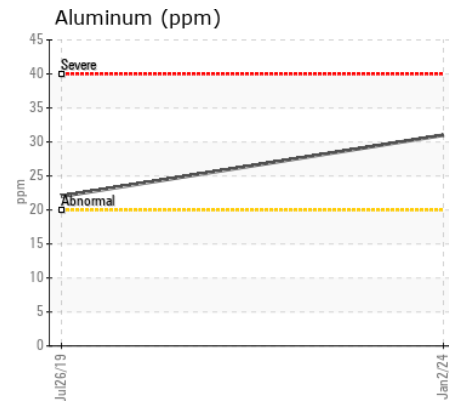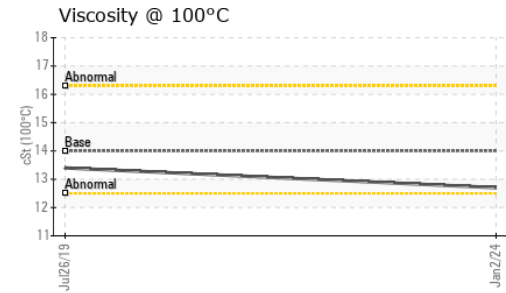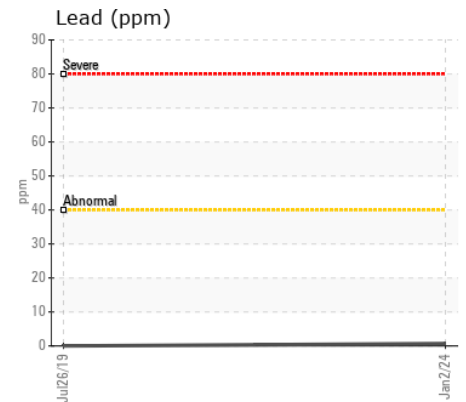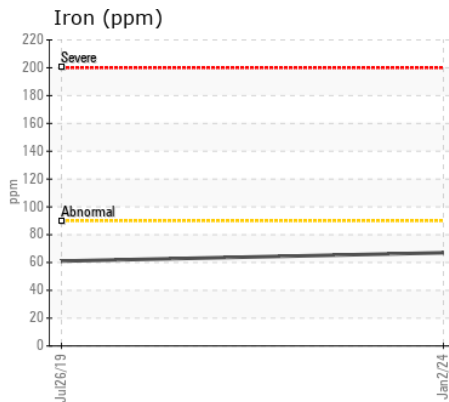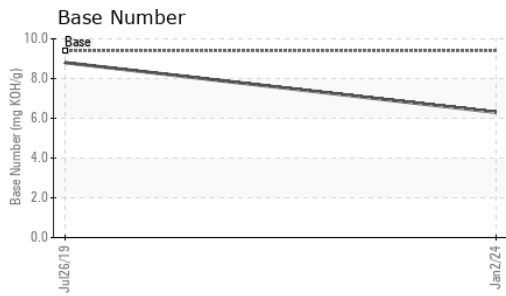

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0012701 **Received** : 09 Jan 2024
Lab Number : 06055277 **Diagnosed** : 10 Jan 2024
Unique Number : 10821226 **Diagnostician** : Wes Davis
Test Package : MOB1+

RUSH TRUCK LEASING - SALT LAKE CITY IDEALEASE
 964 SOUTH 3800 WEST, BLDG B
 SALT LAKE CITY, UT
 US 84104
 Contact: DEBBIE ANDERSON

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (801)972-7154
 F: (801)977-9381