



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
ROBIN B INGRAM
 Machine Id
[ROBIN B INGRAM] 003 617985-3
 Component
Starboard Main Engine
 Fluid
CHEVRON DELO 710 LE (250 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06055527	MW06036230	MW06036234
Sample Date		Client Info		01 Dec 2023	01 Oct 2023	01 Sep 2023
Machine Age	hrs	Client Info		62568	61281	60556
Oil Age	hrs	Client Info		62568	61281	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	16	16	16
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	1	2
Lead	ppm	ASTM D5185m	>18	9	14	15
Copper	ppm	ASTM D5185m	>80	19	20	21
Tin	ppm	ASTM D5185m	>14	3	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








The high sodium (Na) level indicates the possible presence of salt water.

Silicon	ppm	ASTM D5185m	>20	10	13	14
Potassium	ppm	ASTM D5185m	>20	3	4	6
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	1.1	1
Nitration	Abs/cm	*ASTM D7624	>20	8.0	7.5	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.3	16.7	16.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	▲ 71	▲ 100	▲ 108
Boron	ppm	ASTM D5185m		42	46	56
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		41	44	47
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		43	66	94
Calcium	ppm	ASTM D5185m		3183	3256	3290
Phosphorus	ppm	ASTM D5185m		5	10	17
Zinc	ppm	ASTM D5185m	10	0	7	18
Sulfur	ppm	ASTM D5185m		2251	2388	2410
Oxidation	Abs/.1mm	*ASTM D7414	>25	7.6	7.0	6.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	9.14	9.42	9.21
Visc @ 100°C	cSt	ASTM D445	15.5	14.3	14.2	14.1

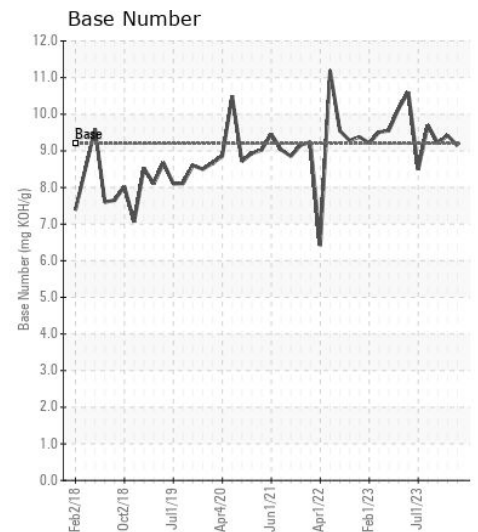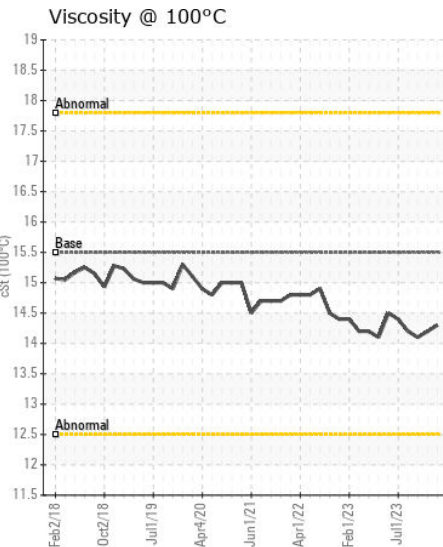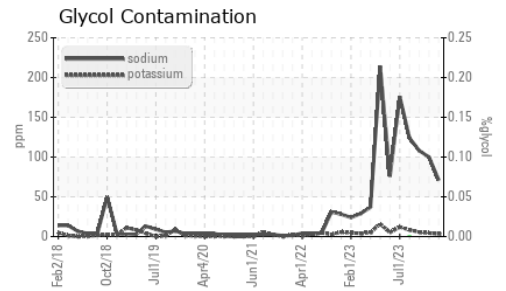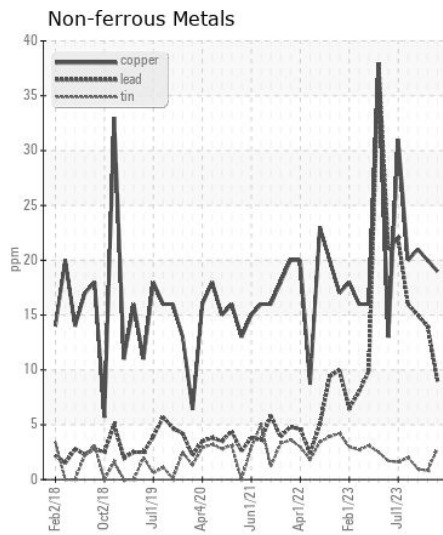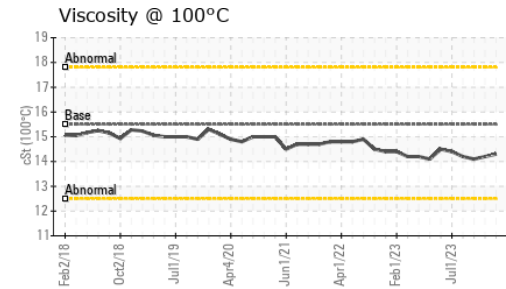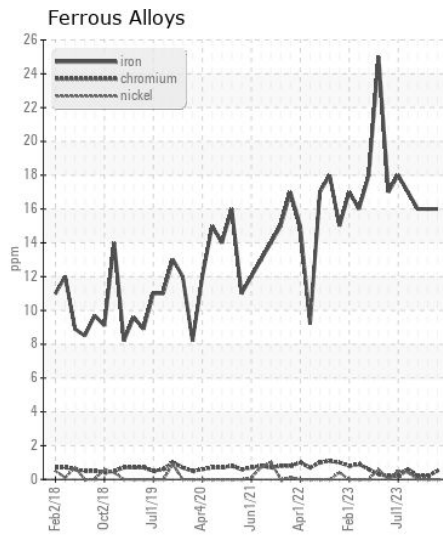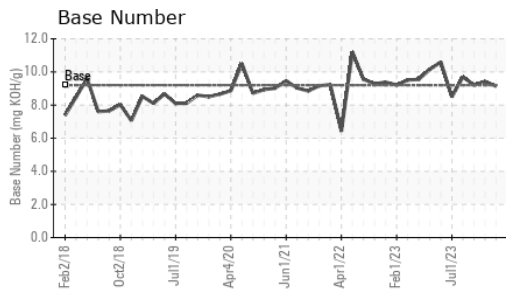

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0605527 **Received** : 09 Jan 2024
Lab Number : 0605527 **Diagnosed** : 10 Jan 2024
Unique Number : 10821476 **Diagnostician** : Don Baldrige
Test Package : MAR 2 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: DALE MORIE
 dale.morie@ingrambarga.com
 T: (270)415-4467
 F: (615)695-3697