



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 550K-II 1T0550KKKNF428224**  
 Component  
**Left Final Drive**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0194389</b>	JR0182595	---
Sample Date		Client Info		<b>08 Jan 2024</b>	29 Aug 2023	---
Machine Age	hrs	Client Info		<b>1559</b>	1094	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>430</b>	462	---
Iron	ppm	ASTM D5185m	>750	<b>151</b>	376	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	3	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>1</b>	3	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>7</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>2</b>	4	---
Boron	ppm	ASTM D5185m		<b>37</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>30</b>	2	---
Manganese	ppm	ASTM D5185m		<b>2</b>	7	---
Magnesium	ppm	ASTM D5185m		<b>185</b>	83	---
Calcium	ppm	ASTM D5185m		<b>3050</b>	3935	---
Phosphorus	ppm	ASTM D5185m		<b>1004</b>	1034	---
Zinc	ppm	ASTM D5185m		<b>1185</b>	1296	---
Sulfur	ppm	ASTM D5185m		<b>3537</b>	4324	---
Visc @ 40°C	cSt	ASTM D445		<b>55.7</b>	50.6	---

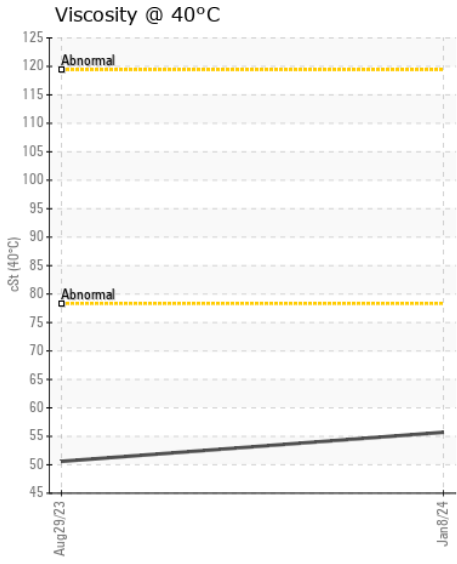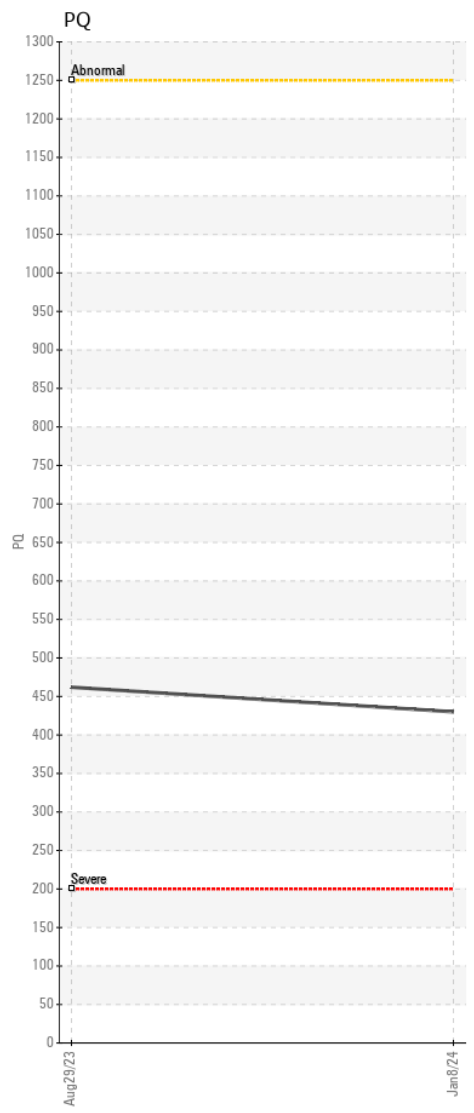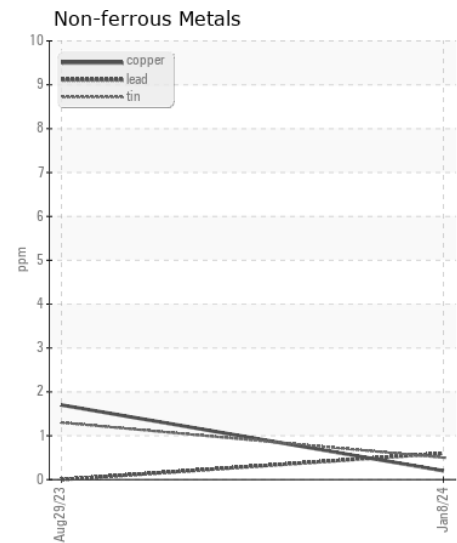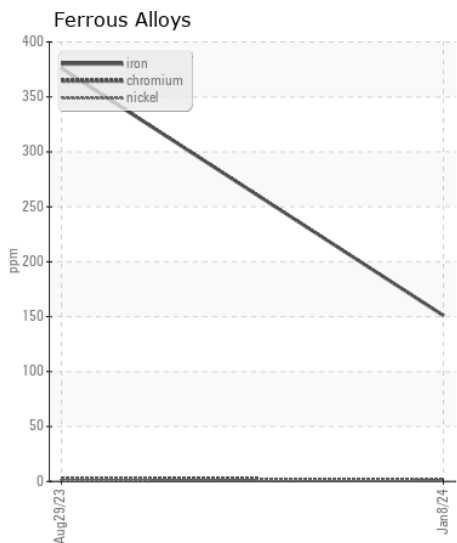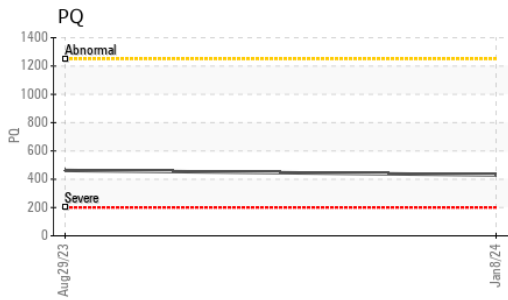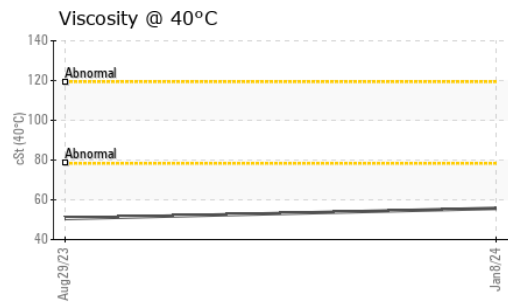

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0194389 **Received** : 09 Jan 2024  
**Lab Number** : 06055589 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821538 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556