



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[9042]**  
Machine Id  
**VOLVO A30G 753002**  
Component  
**Drop Box**  
Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP437689</b>	VCP425089	VCP398667
Sample Date		Client Info		<b>04 Jan 2024</b>	17 Jul 2023	05 May 2023
Machine Age	hrs	Client Info		<b>1810</b>	885	381
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>97</b>	78	88
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>5</b>	6	7
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>3</b>	7	32
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	6
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	9
Boron	ppm	ASTM D5185m	111	<b>161</b>	210	216
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.9	<b>4</b>	10	9
Manganese	ppm	ASTM D5185m	0.0	<b>1</b>	1	3
Magnesium	ppm	ASTM D5185m	39	<b>1</b>	10	7
Calcium	ppm	ASTM D5185m	93	<b>21</b>	63	71
Phosphorus	ppm	ASTM D5185m	920	<b>1071</b>	1124	2561
Zinc	ppm	ASTM D5185m	104	<b>&lt;1</b>	34	62
Sulfur	ppm	ASTM D5185m	20179	<b>28284</b>	25056	25056
Visc @ 40°C	cSt	ASTM D445	333	<b>311</b>	247	▲ 49.0

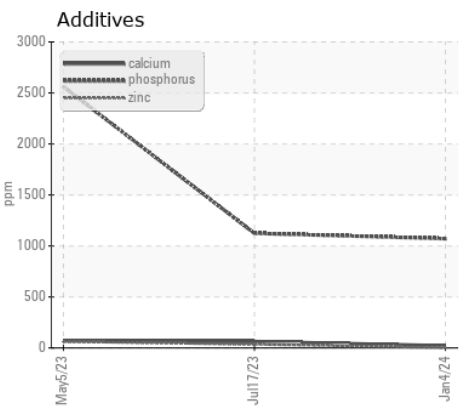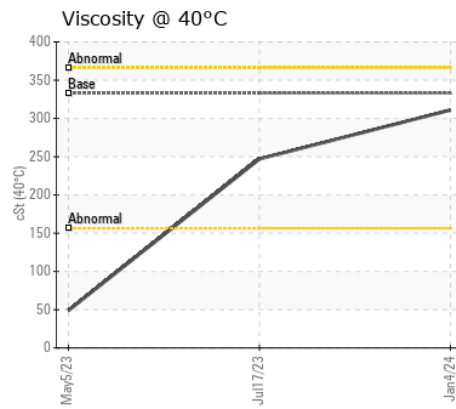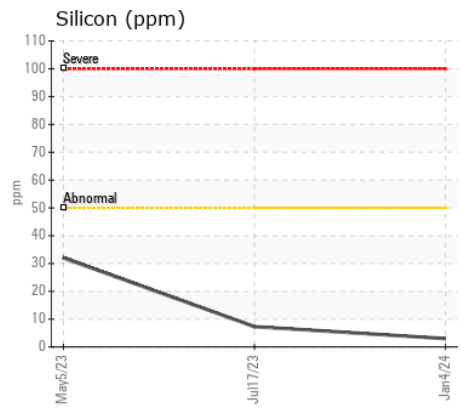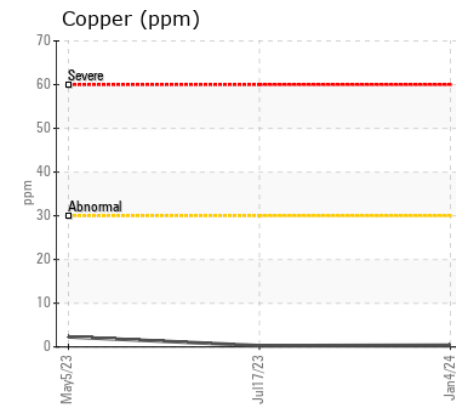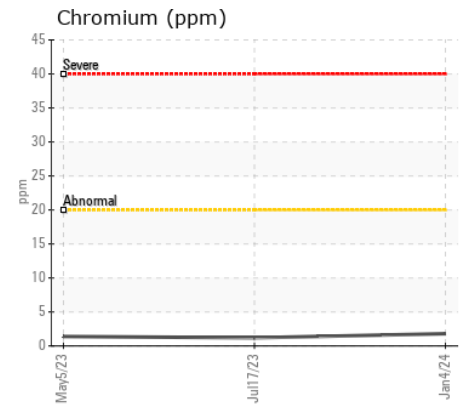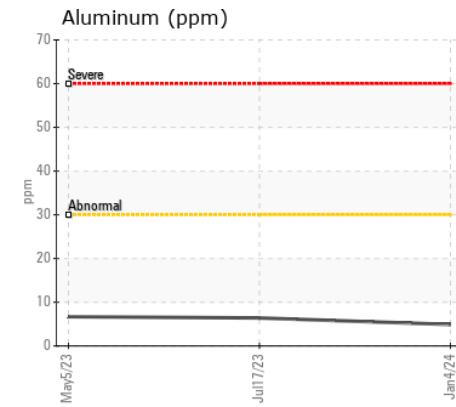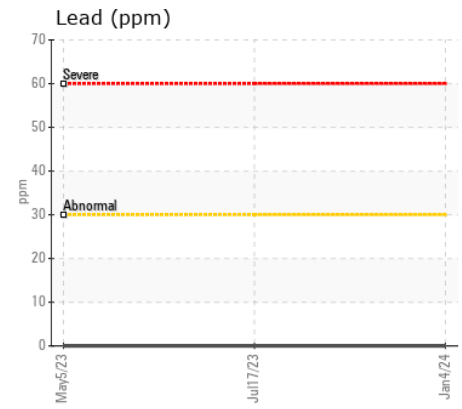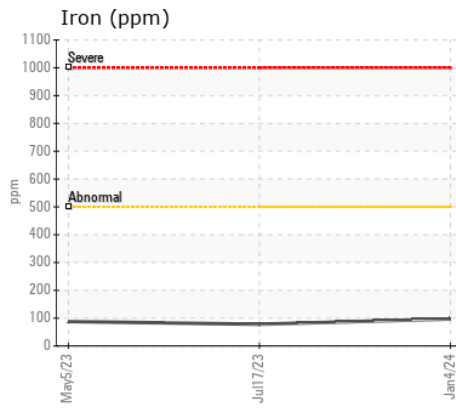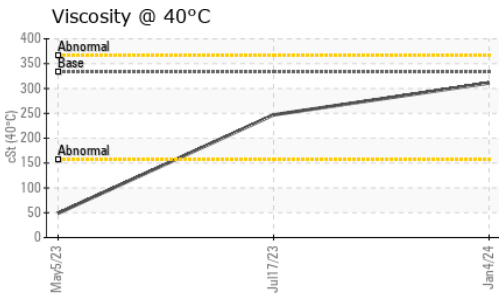

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437689 **Received** : 09 Jan 2024  
**Lab Number** : 06055604 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821553 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**BLUE GOOSE GROWERS**  
 16059 W ORANGE AVE  
 FT PIERCE, FL  
 US 34945  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020

F: