



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[639041]**  
Machine Id  
**VOLVO A30 753223**  
Component  
**Rear Axle**  
Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP437684</b>	VCP431290	---
Sample Date		Client Info		<b>04 Jan 2024</b>	16 Oct 2023	---
Machine Age	hrs	Client Info		<b>1548</b>	1012	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Changed	---
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>114</b>	468	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	8	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	4	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>10</b>	43	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>2</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	5	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	2	---
Boron	ppm	ASTM D5185m	111	<b>177</b>	252	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.9	<b>&lt;1</b>	6	---
Manganese	ppm	ASTM D5185m	0.0	<b>3</b>	13	---
Magnesium	ppm	ASTM D5185m	39	<b>18</b>	0	---
Calcium	ppm	ASTM D5185m	93	<b>163</b>	485	---
Phosphorus	ppm	ASTM D5185m	920	<b>1116</b>	1425	---
Zinc	ppm	ASTM D5185m	104	<b>84</b>	193	---
Sulfur	ppm	ASTM D5185m	20179	<b>26361</b>	22529	---
Visc @ 40°C	cSt	ASTM D445	333	<b>240</b>	▲ 96.8	---

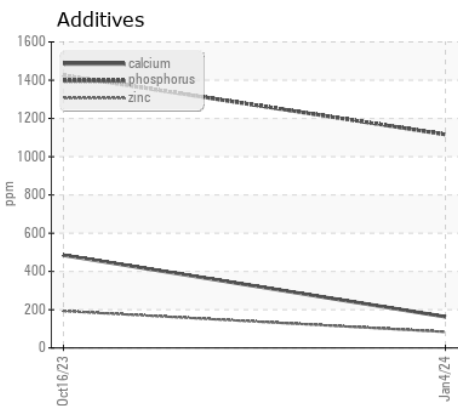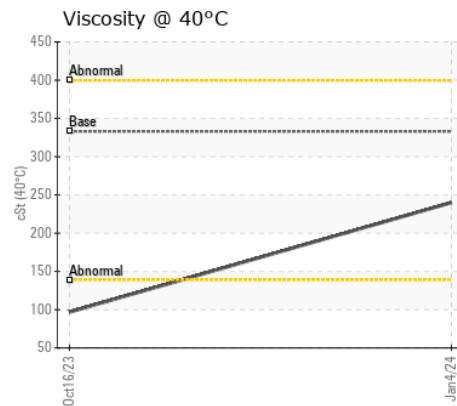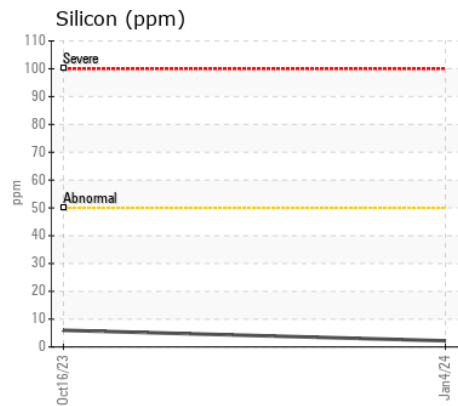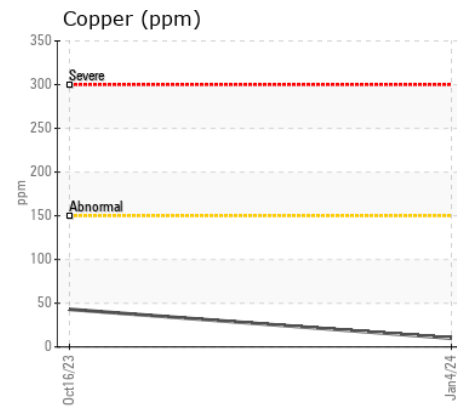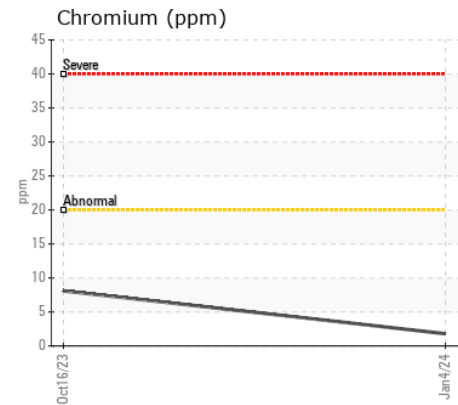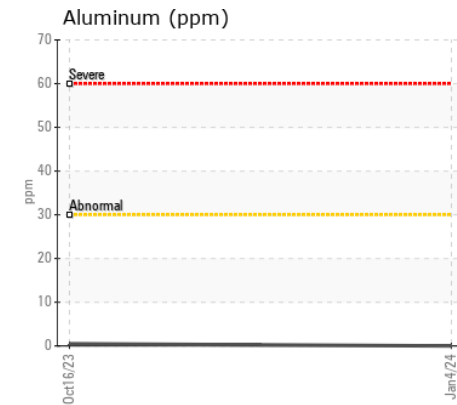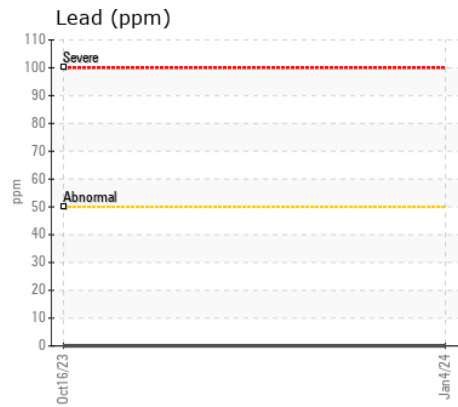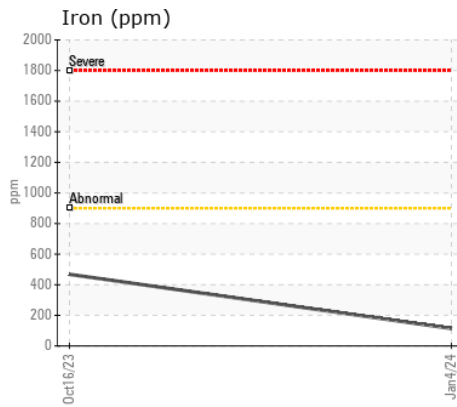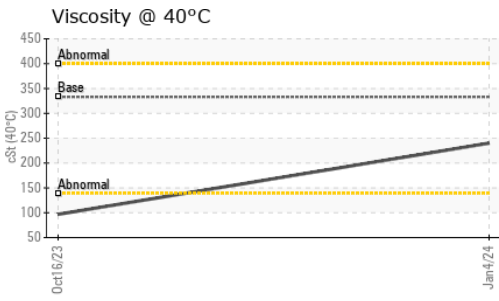

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437684 **Received** : 09 Jan 2024  
**Lab Number** : 06055610 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821559 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**BLUE GOOSE GROWERS**  
 16059 W ORANGE AVE  
 FT PIERCE, FL  
 US 34945  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020

F: