



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
T276
Component
Rear Differential
Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0114700	PCA0092545	PCA0081220
Sample Date		Client Info		03 Jan 2024	06 Apr 2023	29 Nov 2022
Machine Age	mls	Client Info		205356	154015	128590
Oil Age	mls	Client Info		205356	154015	0
Filter Age	mls	Client Info		0	154015	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	60	39	64
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	1
Aluminum	ppm	ASTM D5185m	>25	2	0	1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	0	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	12	7	12
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m		209	252	222
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		9	12	20
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m		98	102	99
Calcium	ppm	ASTM D5185m		189	204	191
Phosphorus	ppm	ASTM D5185m		1341	1315	1287
Zinc	ppm	ASTM D5185m		155	173	164
Sulfur	ppm	ASTM D5185m		20120	20809	25056
Visc @ 40°C	cSt	ASTM D445	106	83.8	87.6	86.0

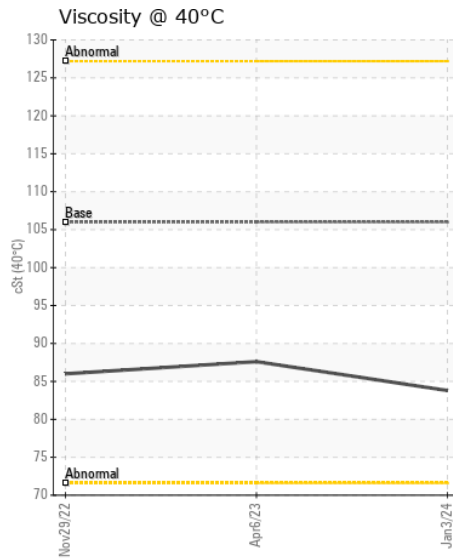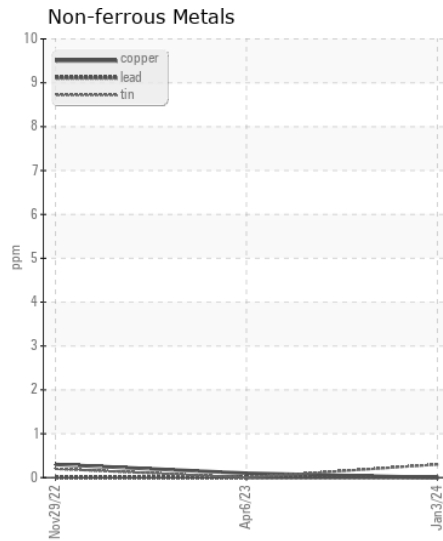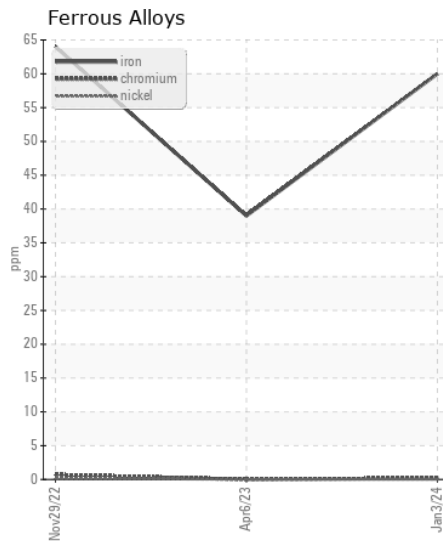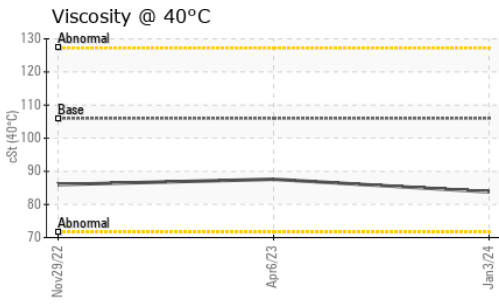

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114700 **Recieved** : 09 Jan 2024
Lab Number : 06055636 **Diagnosed** : 10 Jan 2024
Unique Number : 10821585 **Diagnostician** : Wes Davis
Test Package : FLEET

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)