



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[659355]**  
Machine Id  
**VOLVO A30 753369**  
Component  
**Transmission (Auto)**  
Fluid  
**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP437660</b>	VCP432914	VCP422260
Sample Date		Client Info		<b>04 Jan 2024</b>	23 Oct 2023	07 Aug 2023
Machine Age	hrs	Client Info		<b>1486</b>	1052	509
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>30</b>	30	19
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>19</b>	20	11
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>19</b>	20	11
Tin	ppm	ASTM D5185m	>10	<b>4</b>	5	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>12</b>	14	12
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>6</b>	5	0
Boron	ppm	ASTM D5185m	187	<b>66</b>	63	81
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0.0	<b>3</b>	4	2
Magnesium	ppm	ASTM D5185m	6.8	<b>0</b>	11	0
Calcium	ppm	ASTM D5185m	215	<b>69</b>	76	67
Phosphorus	ppm	ASTM D5185m	445	<b>174</b>	179	184
Zinc	ppm	ASTM D5185m	56	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	1336	<b>1699</b>	1734	2272
Visc @ 40°C	cSt	ASTM D445	35.3	<b>28.3</b>	28.4	29.0

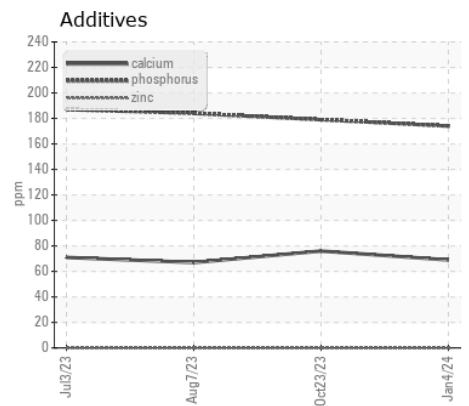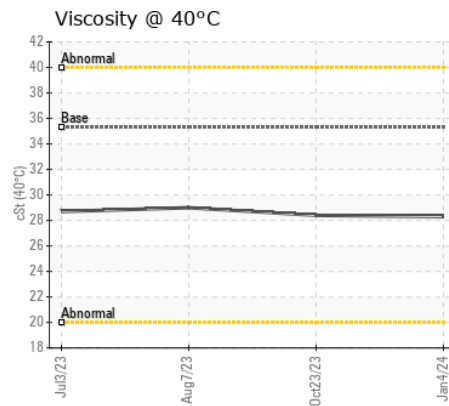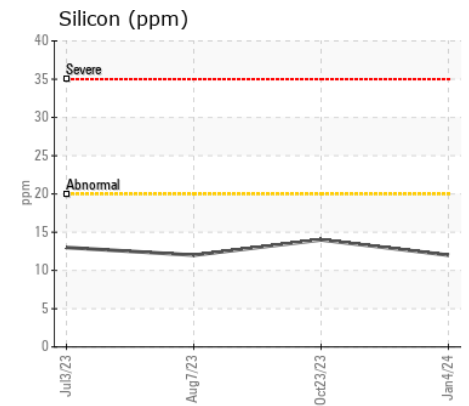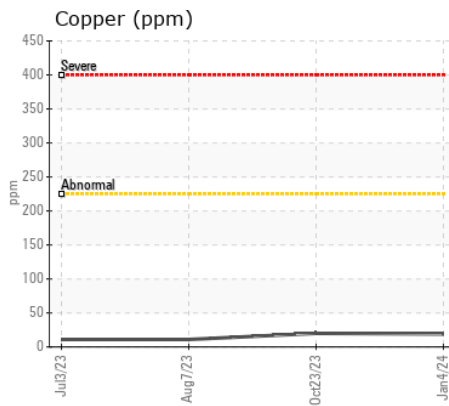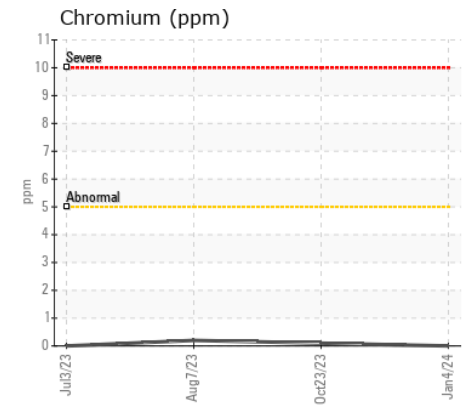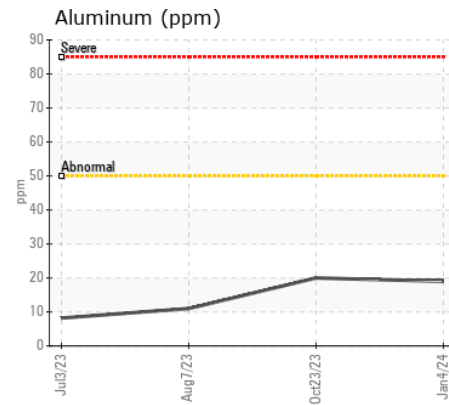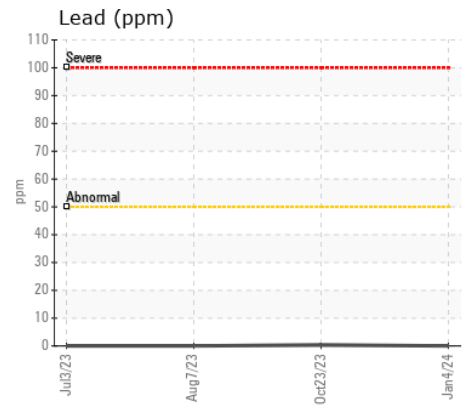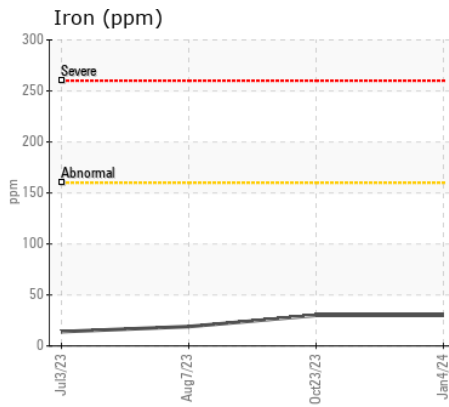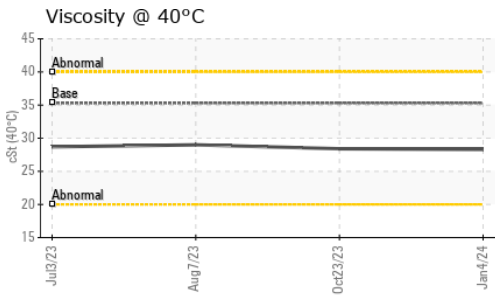

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437660 **Received** : 09 Jan 2024  
**Lab Number** : 06055670 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821619 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 1

**BLUE GOOSE GROWERS**  
 16059 W ORANGE AVE  
 FT PIERCE, FL  
 US 34945  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020

F: