



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[9042]
Machine Id
VOLVO A30G 753002
Component
Transmission (Auto)
Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP437640	VCP412632	VCP425084
Sample Date		Client Info		04 Jan 2024	29 Sep 2023	17 Jul 2023
Machine Age	hrs	Client Info		1810	1304	885
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	28	21	24
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	1	<1	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	20	15	15
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>225	19	16	17
Tin	ppm	ASTM D5185m	>10	4	3	3
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	13	13	13
Potassium	ppm	ASTM D5185m	>20	3	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	5	4
Boron	ppm	ASTM D5185m	187	71	69	86
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	0	0	0
Manganese	ppm	ASTM D5185m	0.0	3	2	3
Magnesium	ppm	ASTM D5185m	6.8	0	<1	0
Calcium	ppm	ASTM D5185m	215	69	71	68
Phosphorus	ppm	ASTM D5185m	445	189	153	204
Zinc	ppm	ASTM D5185m	56	0	<1	0
Sulfur	ppm	ASTM D5185m	1336	1788	1786	2640
Visc @ 40°C	cSt	ASTM D445	35.3	30.1	29.4	29.6

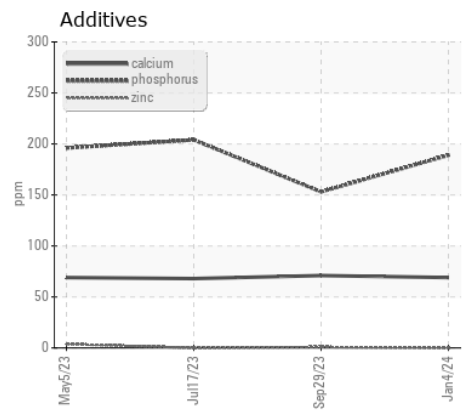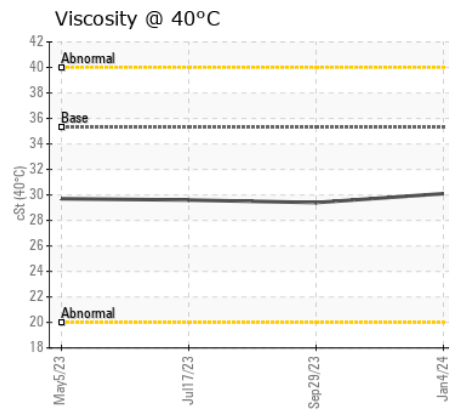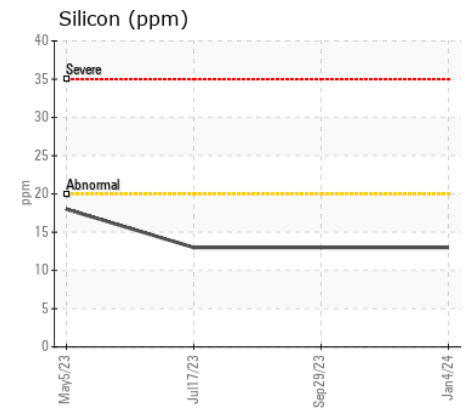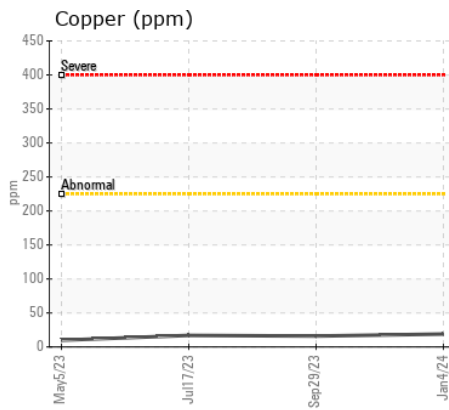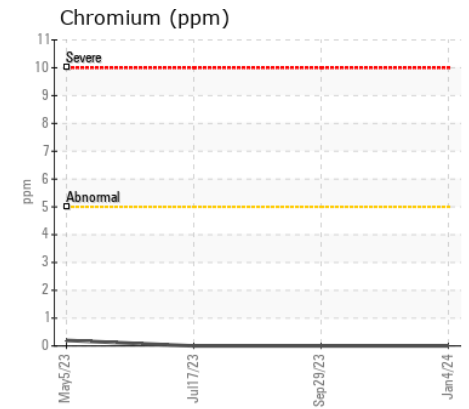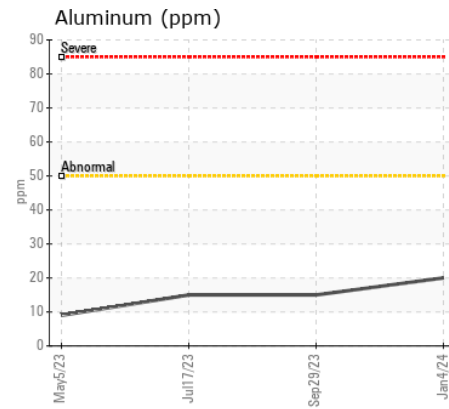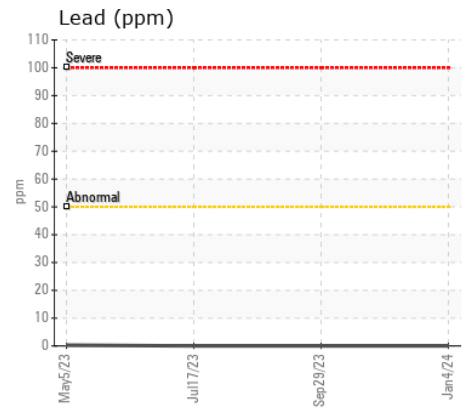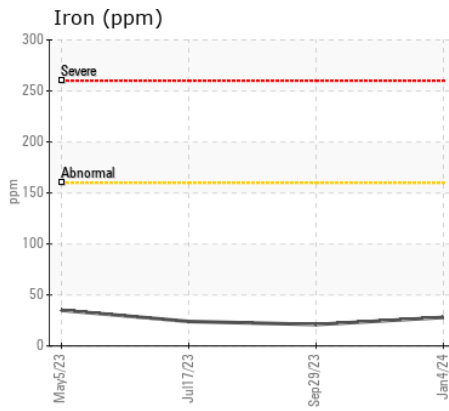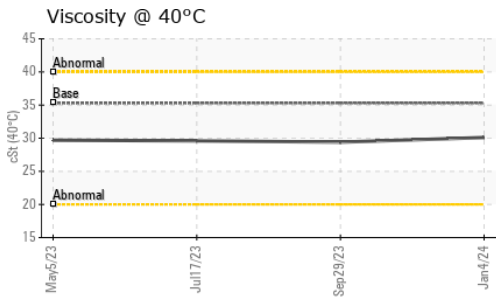

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP437640 **Received** : 09 Jan 2024
Lab Number : 06055671 **Diagnosed** : 10 Jan 2024
Unique Number : 10821620 **Diagnostician** : Jonathan Hester
Test Package : MOB 1

BLUE GOOSE GROWERS
 16059 W ORANGE AVE
 FT PIERCE, FL
 US 34945
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020
 F: