



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
2H28
Machine Id
PETERBILT 348 RTK9953 (S/N 2NP3LJ0X4JM467281)
Component
Transmission (Auto)
Fluid
DEXRON III (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ARI06055675	ARI05985243	ARI05926491
Sample Date		Client Info		08 Jan 2024	19 Oct 2023	15 Aug 2023
Machine Age	mls	Client Info		127304	124914	122043
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	141	135	128
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	1	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	21	21	24
Lead	ppm	ASTM D5185m	>50	9	8	8
Copper	ppm	ASTM D5185m	>225	8	7	8
Tin	ppm	ASTM D5185m	>10	1	2	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	LIGHT	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	8	8	7
Potassium	ppm	ASTM D5185m	>20	5	5	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		9	8	9
Boron	ppm	ASTM D5185m		94	97	112
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		4	3	3
Magnesium	ppm	ASTM D5185m		0	0	<1
Calcium	ppm	ASTM D5185m		40	39	39
Phosphorus	ppm	ASTM D5185m		267	265	262
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		713	719	774
Visc @ 40°C	cSt	ASTM D445	35.0	35.5	35.7	36.4

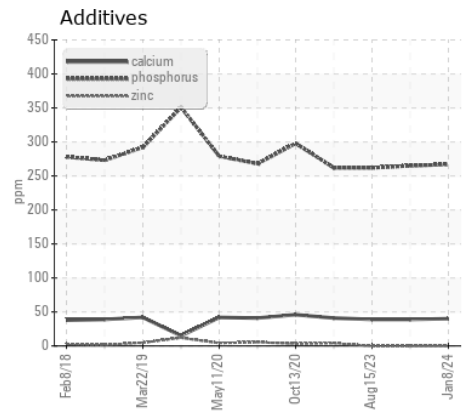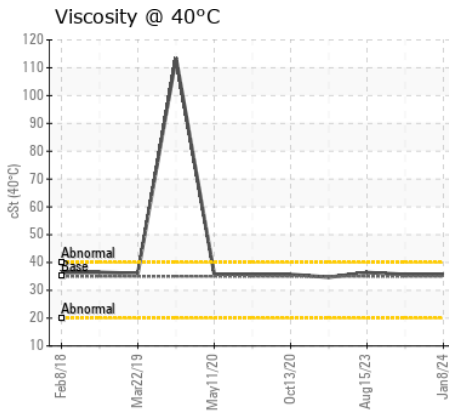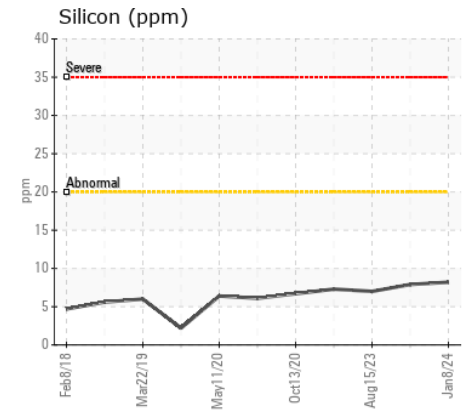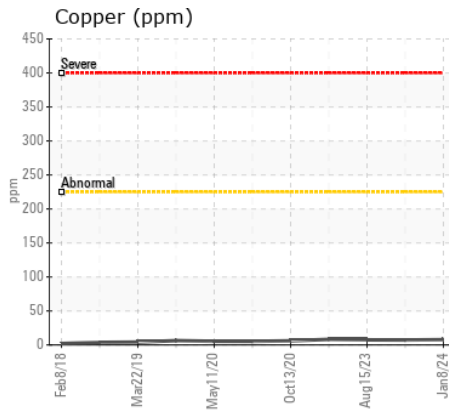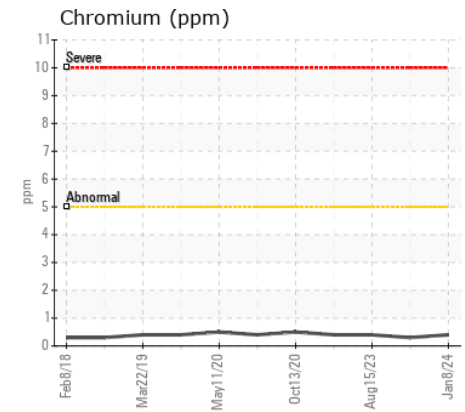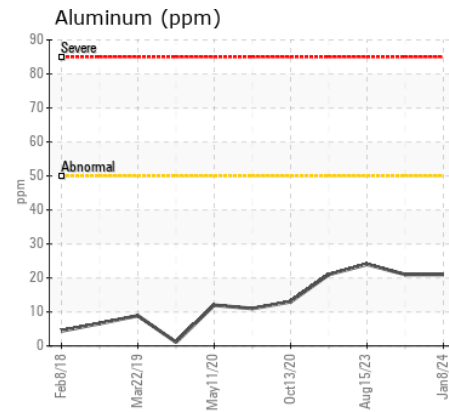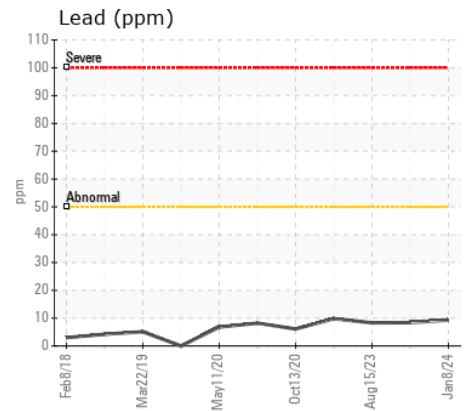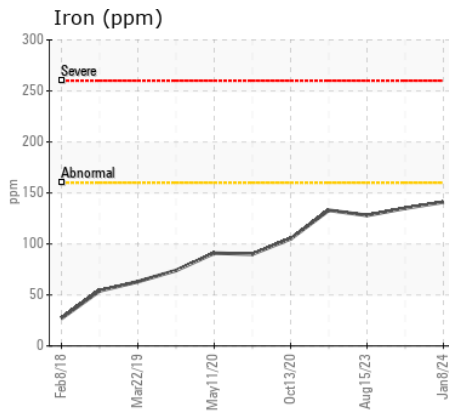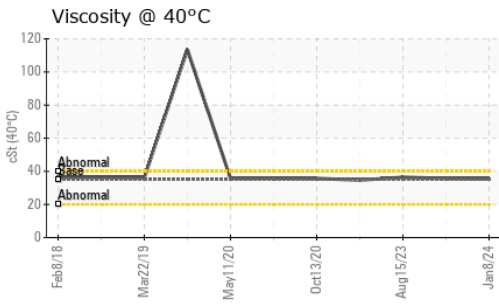

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ARI06055675 **Received** : 09 Jan 2024
Lab Number : 06055675 **Diagnosed** : 10 Jan 2024
Unique Number : 10821624 **Diagnostician** : Wes Davis
Test Package : MOB 1

INSITUFORM TECHNOLOGIES, INC
 17988 EDISON AVE.
 CHESTERFIELD, MO
 US 63005
 Contact: JOHN SLOAN
 ARICHTER@INSITUFORM.COM
 T: (314)280-7555
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)