



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
FLEET
Machine Id
26454

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0113713	PCA0099296	PCA0095975
Sample Date		Client Info		04 Jan 2024	28 Jul 2023	24 May 2023
Machine Age	mls	Client Info		500460	470562	456097
Oil Age	mls	Client Info		29898	35022	20556
Filter Age	mls	Client Info		14580	14466	20556
Oil Changed		Client Info		Changed	Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	25	18
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	1	0	0
Aluminum	ppm	ASTM D5185m	>20	8	6	4
Lead	ppm	ASTM D5185m	>40	0	3	2
Copper	ppm	ASTM D5185m	>330	34	4	2
Tin	ppm	ASTM D5185m	>15	0	1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	7	6
Potassium	ppm	ASTM D5185m	>20	21	▲ 44	16
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.7	10.3	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.3	23.2	22.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		12	▲ 60	27
Boron	ppm	ASTM D5185m	2	48	2	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	80	61	62
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	950	792	962	1013
Calcium	ppm	ASTM D5185m	1050	1735	1092	1152
Phosphorus	ppm	ASTM D5185m	995	1217	999	1083
Zinc	ppm	ASTM D5185m	1180	1459	1289	1385
Sulfur	ppm	ASTM D5185m	2600	3902	3235	3080
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.1	19.7	18.5
Base Number (BN)	mg KOH/g	ASTM D2896		7.3	5.6	7.1
Visc @ 100°C	cSt	ASTM D445	12.00	12.4	11.3	11.3

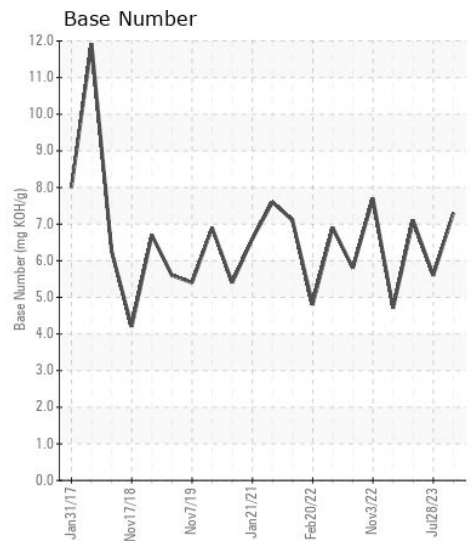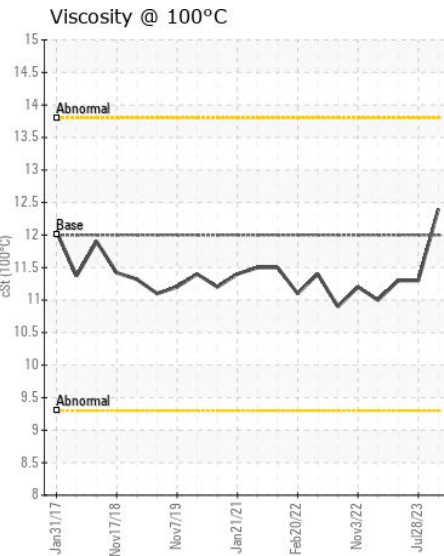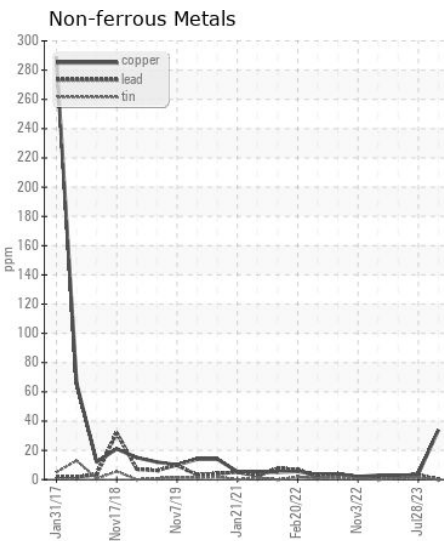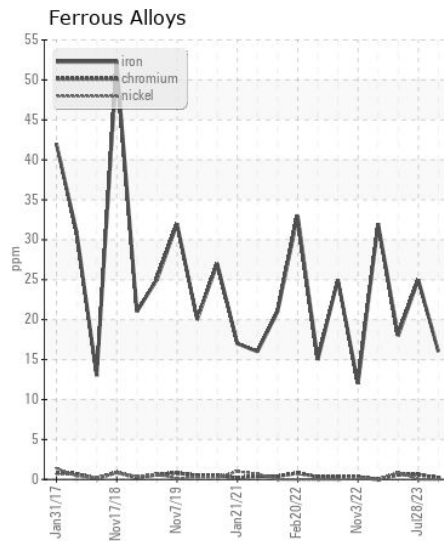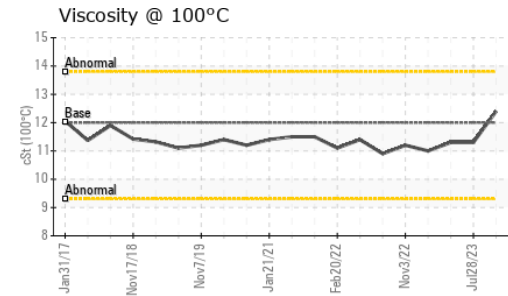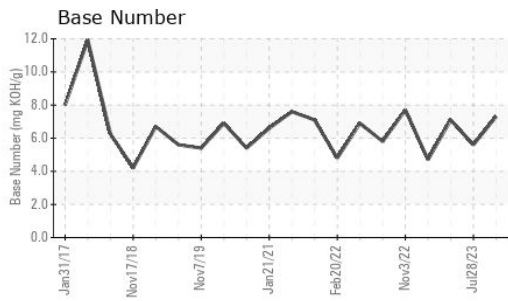

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113713 **Received** : 09 Jan 2024
Lab Number : 06055807 **Diagnosed** : 10 Jan 2024
Unique Number : 10821756 **Diagnostician** : Jonathan Hester
Test Package : FLEET

PERDUE FARMS - ACCOMAC
 22520 LANKFORD HWY
 ACCOMAC, VA
 US 23301
 Contact: PEGGY KIMES
 peggy.kimes@perdue.com
 T: (757)787-5304
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)