



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Mobile Fleet
Machine Id
5100 5100
Component
Drop Box
Fluid
MOBIL MOBILTRANS HD 30 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0861599	WC0852350	WC0784710
Sample Date		Client Info		05 Jan 2024	06 Sep 2023	15 Mar 2023
Machine Age	hrs	Client Info		12204	11569	10970
Oil Age	hrs	Client Info		1835	1200	601
Filter Age	hrs	Client Info		0	0	601
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	15	29	21
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	6	7
Lead	ppm	ASTM D5185m	>20	<1	3	2
Copper	ppm	ASTM D5185m	>50	13	15	10
Tin	ppm	ASTM D5185m	>3	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>60	14	15	16
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	1070	626	1157
Particles >6µm		ASTM D7647	>5000	583	341	630
Particles >14µm		ASTM D7647	>640	99	58	107
Particles >21µm		ASTM D7647	>160	33	20	36
Particles >38µm		ASTM D7647	>40	5	3	6
Particles >71µm		ASTM D7647	>10	1	0	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	17/16/14	16/16/13	17/16/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m		3	5	8
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	1	2
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		21	18	28
Calcium	ppm	ASTM D5185m		3236	3020	3274
Phosphorus	ppm	ASTM D5185m		941	808	824
Zinc	ppm	ASTM D5185m		954	995	1050
Sulfur	ppm	ASTM D5185m		9000	9242	9803
Visc @ 40°C	cSt	ASTM D445	100	94.6	90.8	90.9

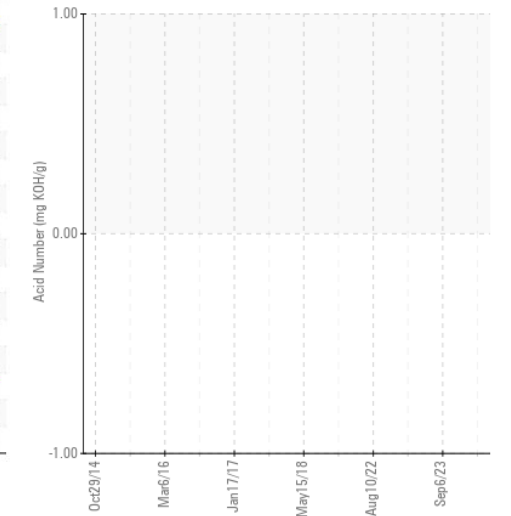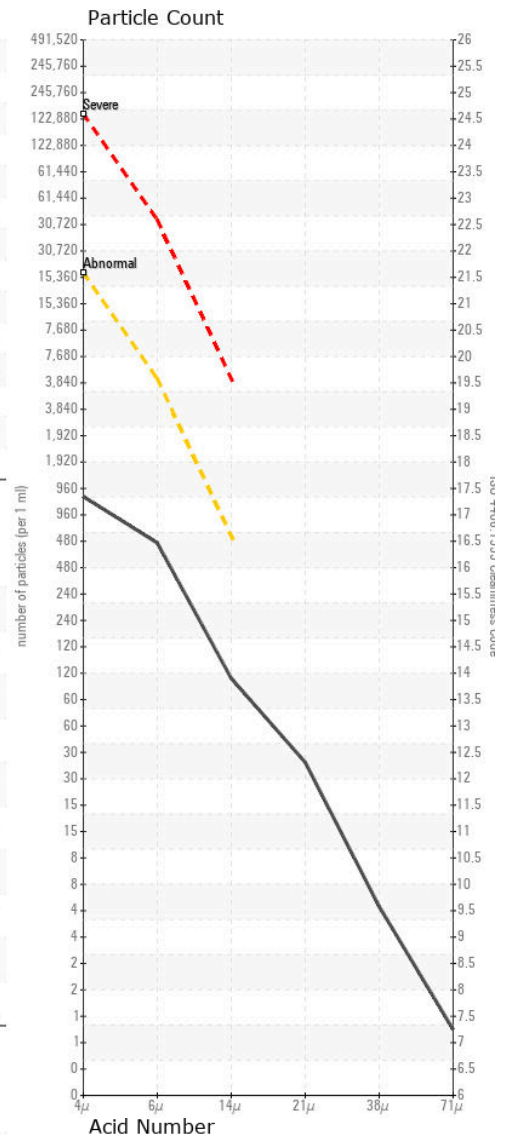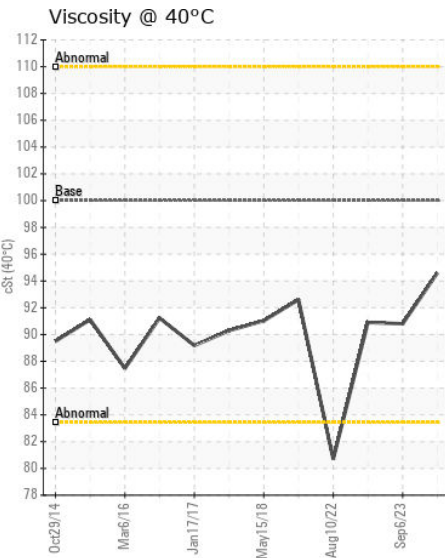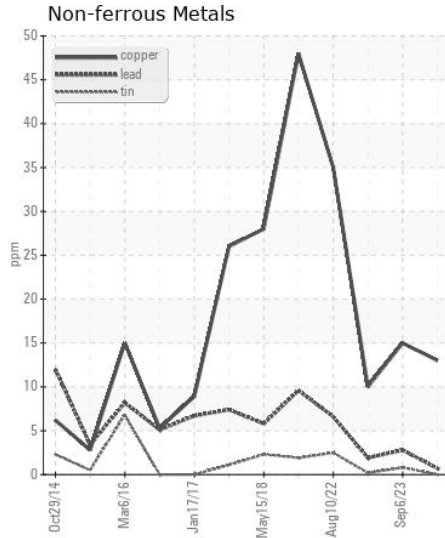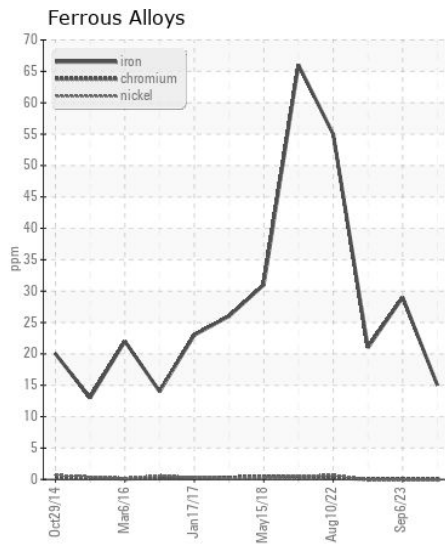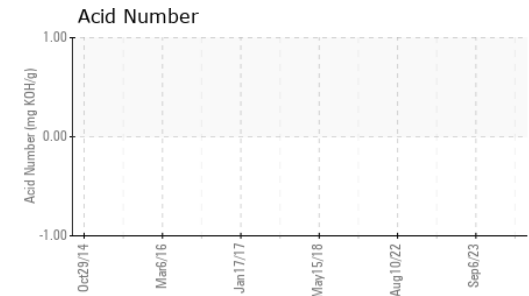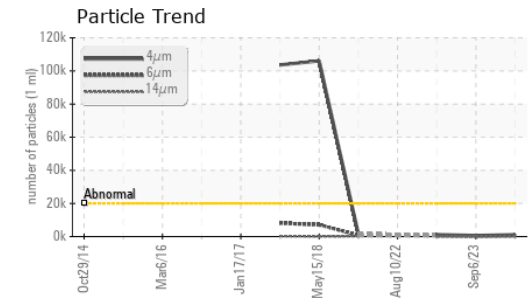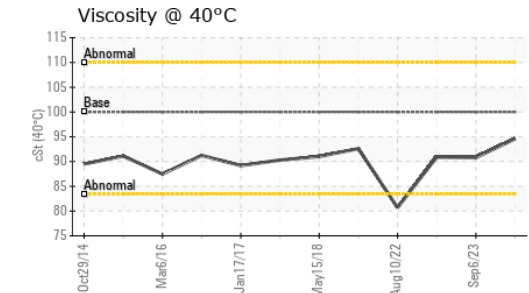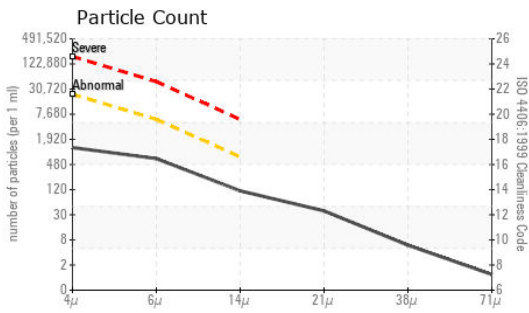

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0861599 **Received** : 09 Jan 2024
Lab Number : 06055833 **Diagnosed** : 11 Jan 2024
Unique Number : 10821782 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162