



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION



Area
Contracting
Machine Id
7606 7606
Component
Hydraulic System
Fluid
MOBIL MOBILTRANS HD 30 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0885974	WC0744672	WC0585671
Sample Date		Client Info		05 Jan 2024	13 Oct 2022	21 Jun 2021
Machine Age	hrs	Client Info		3635	3207	2517
Oil Age	hrs	Client Info		434	431	318
Filter Age	hrs	Client Info		434	431	318
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	7	7	4
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	▲ 7	0
Lead	ppm	ASTM D5185m	>10	0	2	1
Copper	ppm	ASTM D5185m	>75	1	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>20	13	▲ 24	6
Potassium	ppm	ASTM D5185m	>20	<1	<1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	▲ 50727	▲ 276899	▲ 14949
Particles >6µm		ASTM D7647	>1300	▲ 12443	▲ 139126	▲ 3653
Particles >14µm		ASTM D7647	>160	▲ 915	▲ 5515	▲ 259
Particles >21µm		ASTM D7647	>40	▲ 237	▲ 712	▲ 51
Particles >38µm		ASTM D7647	>10	▲ 11	9	2
Particles >71µm		ASTM D7647	>3	2	1	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 23/21/17	▲ 25/24/20	▲ 21/19/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		2	2	<1
Boron	ppm	ASTM D5185m		10	<1	10
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		1	2	1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		122	105	29
Calcium	ppm	ASTM D5185m		2474	2906	3013
Phosphorus	ppm	ASTM D5185m		962	984	984
Zinc	ppm	ASTM D5185m		1012	1259	1168
Sulfur	ppm	ASTM D5185m		7120	8661	5213
Acid Number (AN)	mg KOH/g	ASTM D8045		1.33	---	1.302
Visc @ 40°C	cSt	ASTM D445	100	▲ 51.3	80.9	80.2

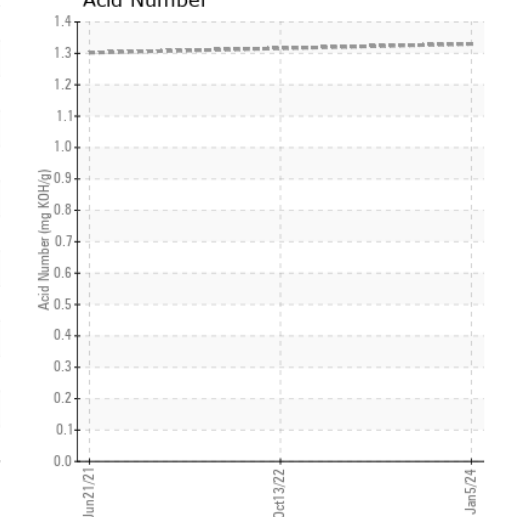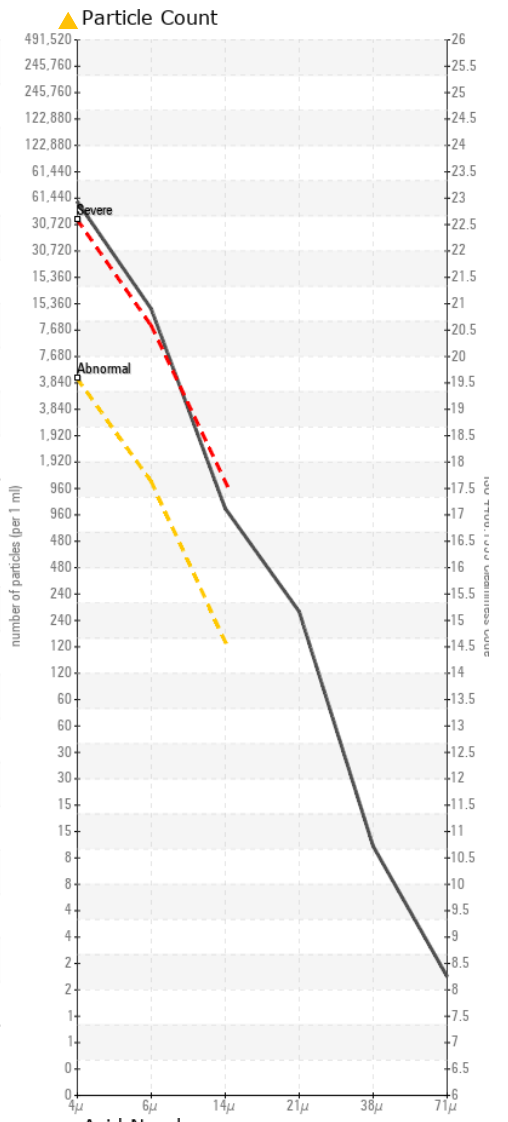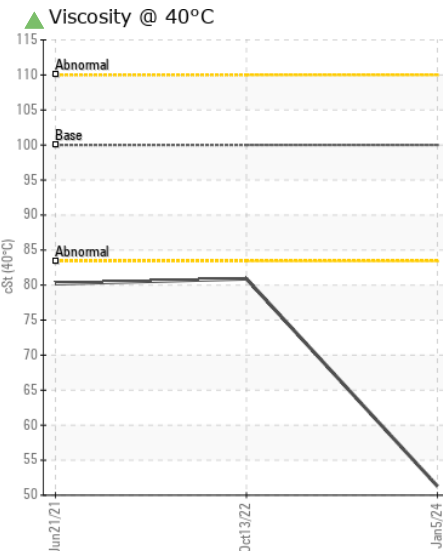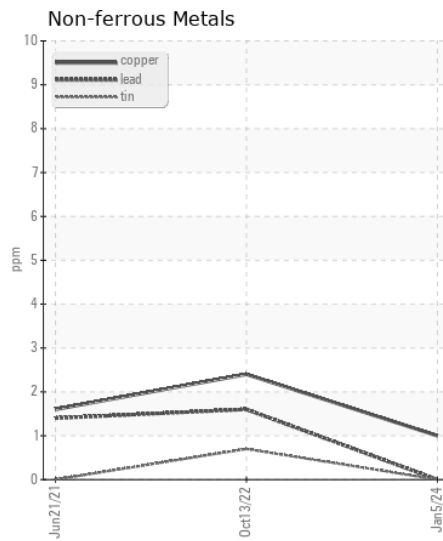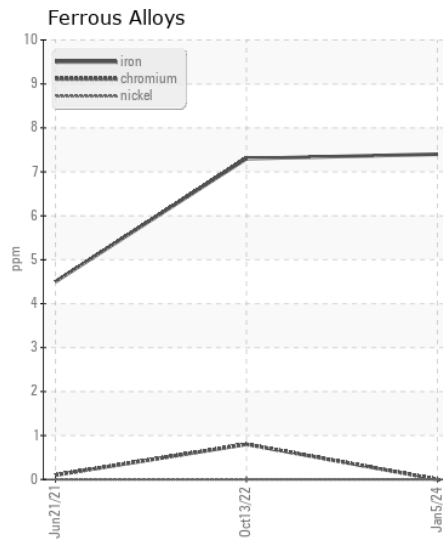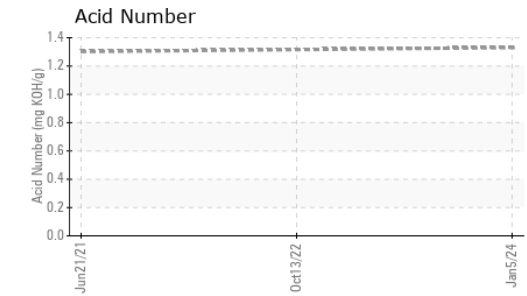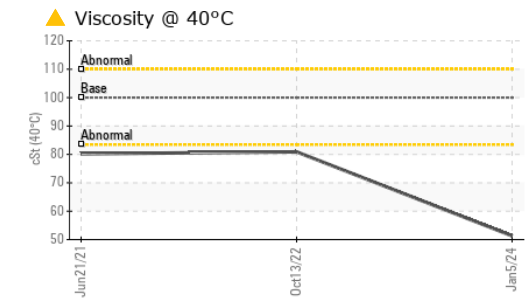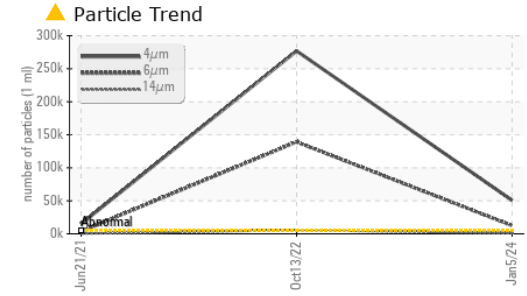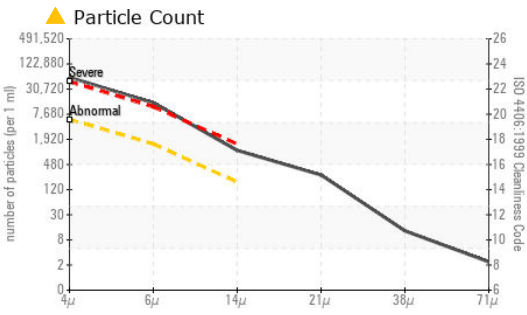

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0885974 **Received** : 09 Jan 2024
Lab Number : 06055839 **Diagnosed** : 10 Jan 2024
Unique Number : 10821788 **Diagnostician** : Don Baldrige
Test Package : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162