



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W15287]
 Machine Id
JOHN DEERE 350GLC 5013844 (S/N 1Ff350GCXCMF815151)
 Component
Hydraulic System
 Fluid
JOHN DEERE ZINC-FREE HYDRAULIC OIL 46 (77 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W15287)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196380	---	---
Sample Date		Client Info		08 Jan 2024	---	---
Machine Age	hrs	Client Info		2485	---	---
Oil Age	hrs	Client Info		2485	---	---
Filter Age	hrs	Client Info		485	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	---	---
Iron	ppm	ASTM D5185m	>32	<1	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	0	---	---
Lead	ppm	ASTM D5185m	>28	0	---	---
Copper	ppm	ASTM D5185m	>50	6	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	3	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	10174	---	---
Particles >6µm		ASTM D7647	>20000	1841	---	---
Particles >14µm		ASTM D7647	>640	42	---	---
Particles >21µm		ASTM D7647	>160	7	---	---
Particles >38µm		ASTM D7647	>40	0	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	21/18/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		153	---	---
Phosphorus	ppm	ASTM D5185m		560	---	---
Zinc	ppm	ASTM D5185m		82	---	---
Sulfur	ppm	ASTM D5185m		273	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.32	---	---
Visc @ 40°C	cSt	ASTM D445	47	47.1	---	---

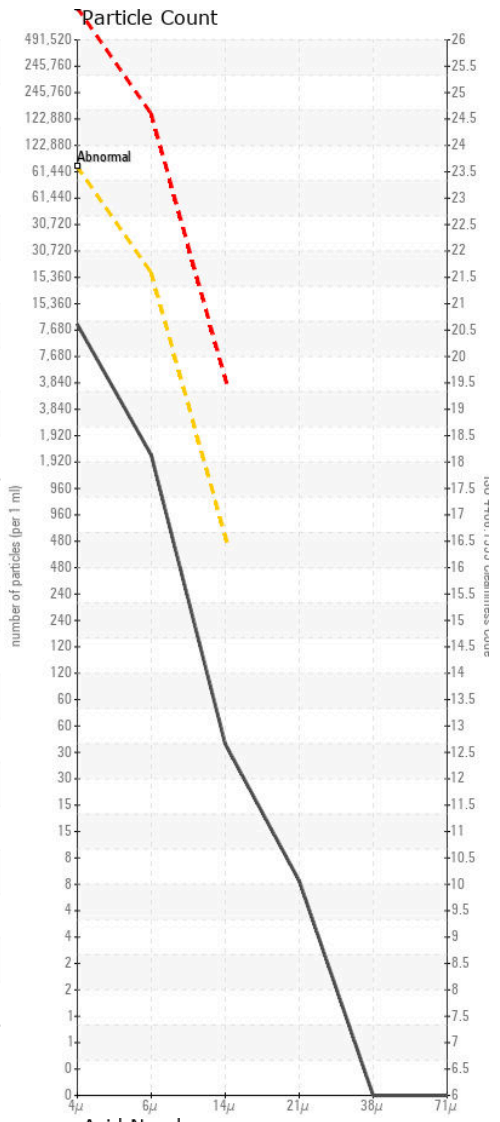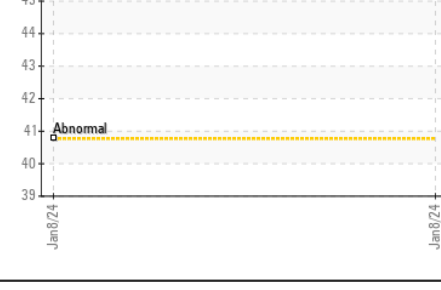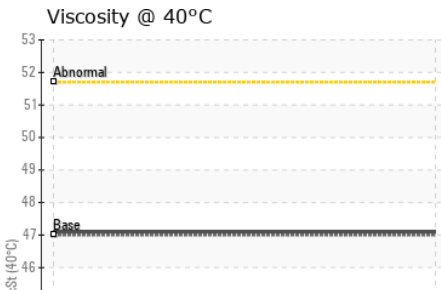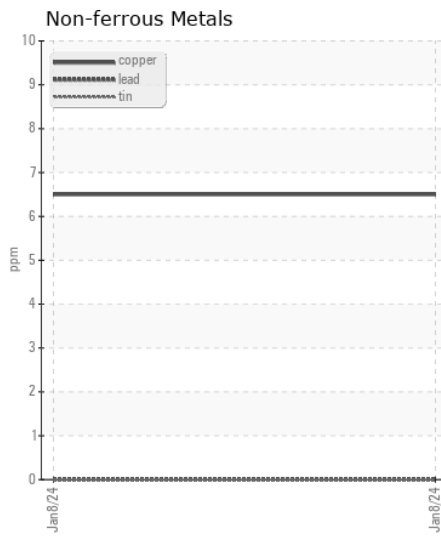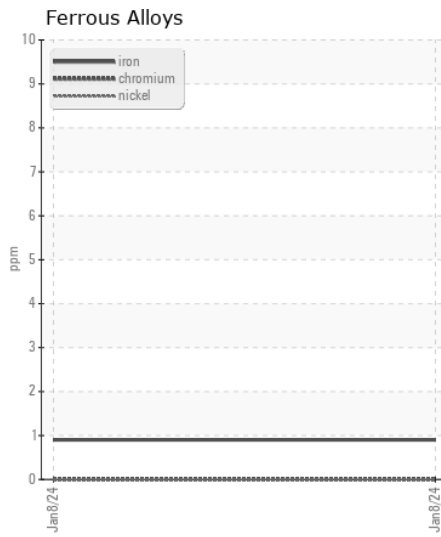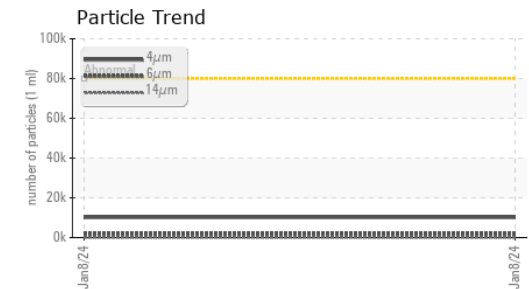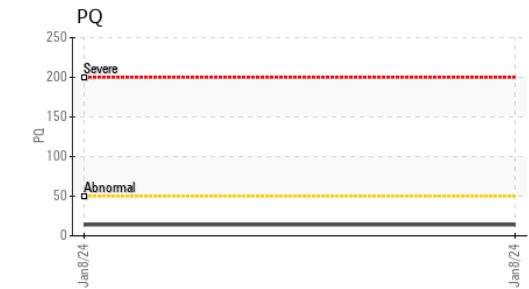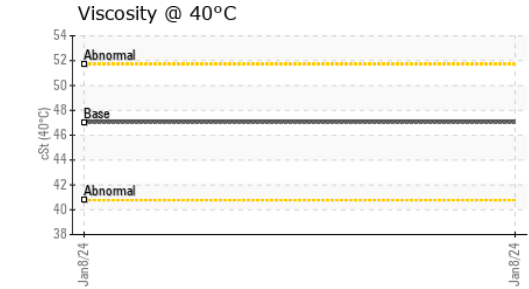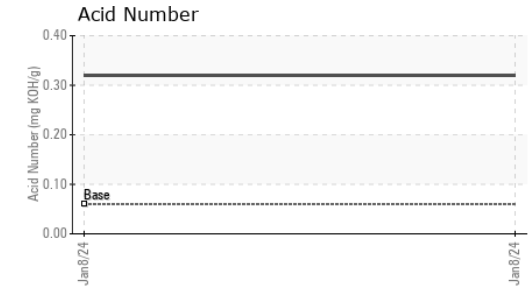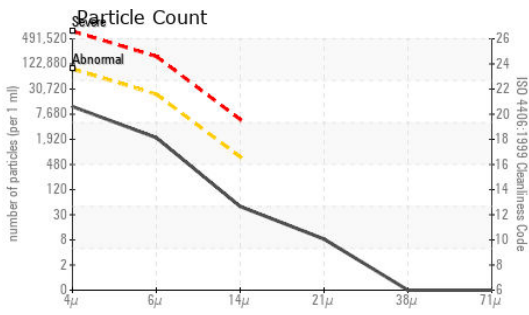

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196380 **Received** : 09 Jan 2024
Lab Number : 06055848 **Diagnosed** : 10 Jan 2024
Unique Number : 10821797 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819
 Contact: WILMINGTON SHOP
 todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we
 T: (910)675-9211
 F: