



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery/500 Hour CSA
Machine Id
VOLVO A40G 2306 (S/N 353318)
Component
Hydraulic System
Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0006208	VCP435483	---
Sample Date		Client Info		04 Jan 2024	01 Aug 2023	---
Machine Age	hrs	Client Info		1087	514	---
Oil Age	hrs	Client Info		1087	514	---
Filter Age	hrs	Client Info		1087	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	2	2	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	0	0	---
Lead	ppm	ASTM D5185m	>20	0	0	---
Copper	ppm	ASTM D5185m	>150	<1	<1	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	5	6	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647		1227	5193	---
Particles >6µm		ASTM D7647	>5000	219	1232	---
Particles >14µm		ASTM D7647	>160	19	64	---
Particles >21µm		ASTM D7647	>40	6	6	---
Particles >38µm		ASTM D7647	>10	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>-/19/14	17/15/11	20/17/13	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	<1	---
Boron	ppm	ASTM D5185m	14	0	0	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.0	0	0	---
Manganese	ppm	ASTM D5185m	0.0	0	<1	---
Magnesium	ppm	ASTM D5185m	2.6	0	1	---
Calcium	ppm	ASTM D5185m	49	61	58	---
Phosphorus	ppm	ASTM D5185m	354	341	340	---
Zinc	ppm	ASTM D5185m	419	393	447	---
Sulfur	ppm	ASTM D5185m	3719	1115	1503	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.42	0.45	---
Visc @ 40°C	cSt	ASTM D445	46	43.1	43.3	---

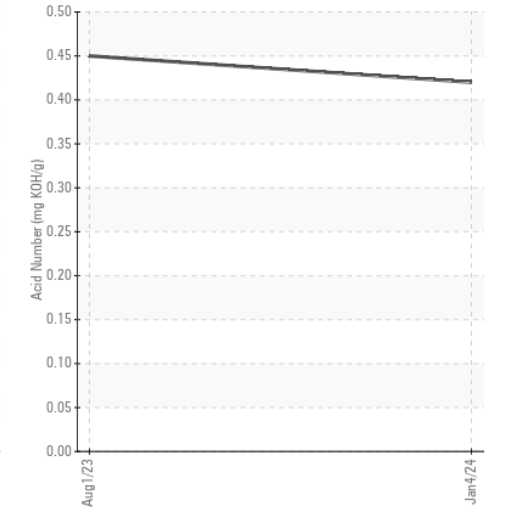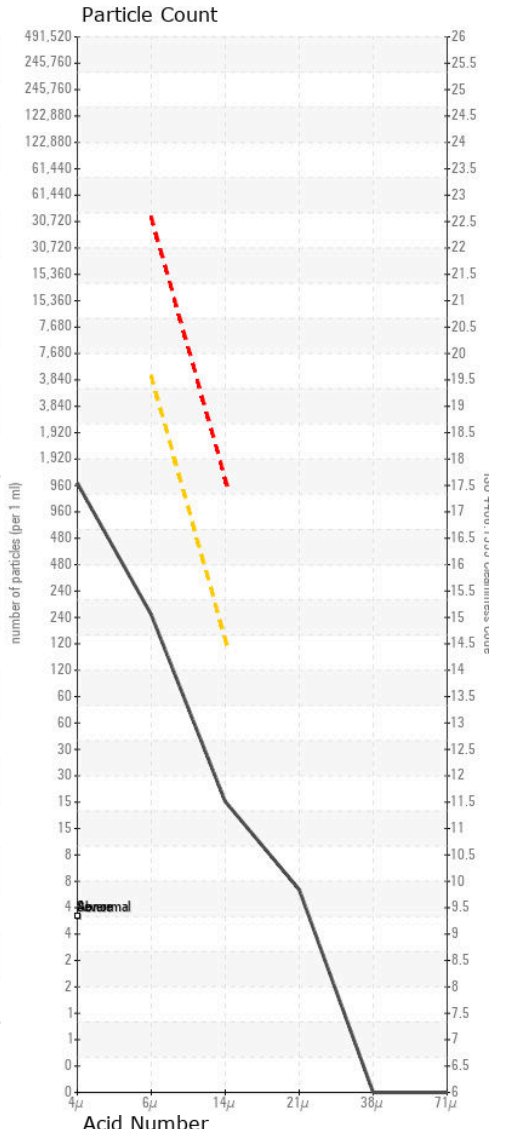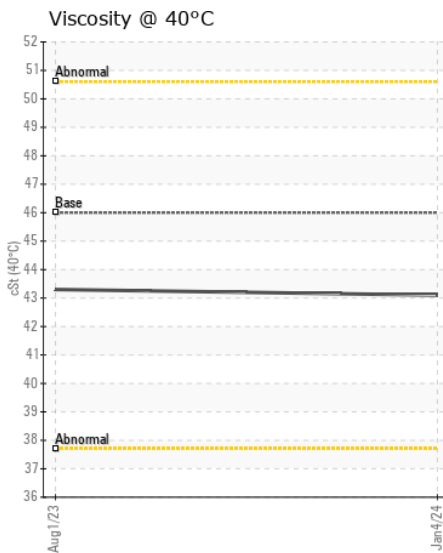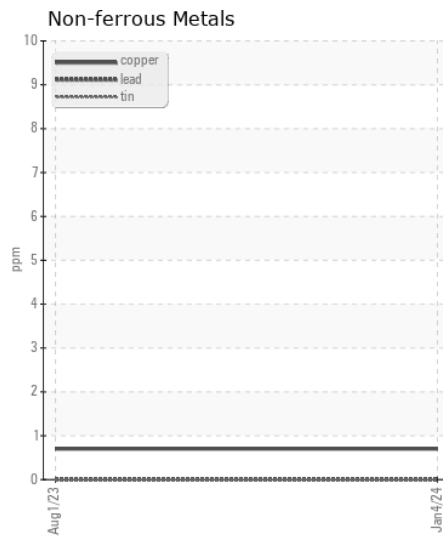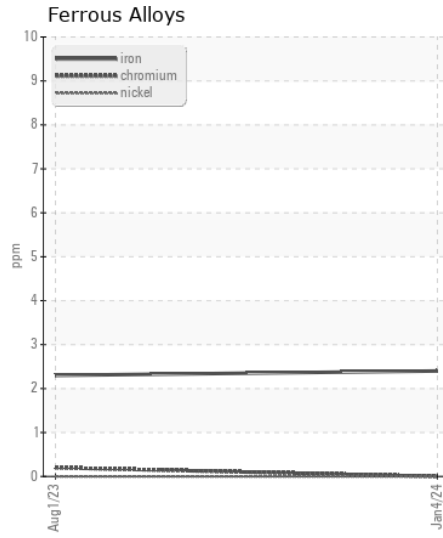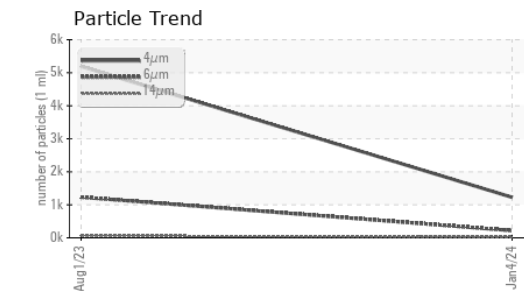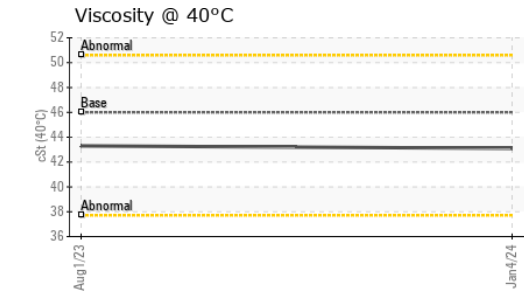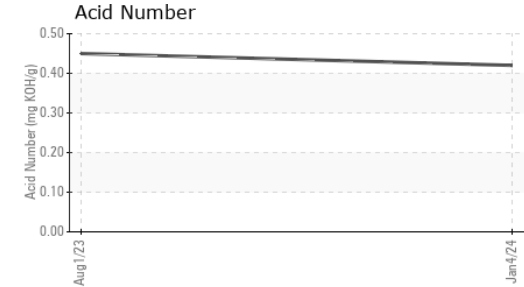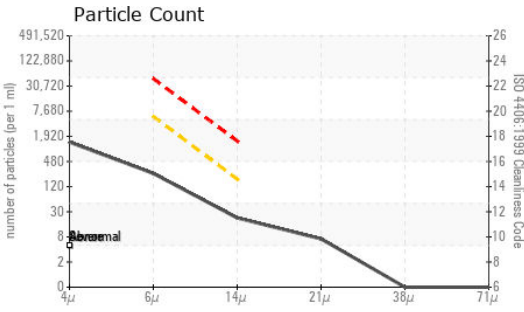

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0006208 **Received** : 09 Jan 2024
Lab Number : 06055869 **Diagnosed** : 10 Jan 2024
Unique Number : 10821818 **Diagnostician** : Wes Davis
Test Package : CONST

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216
 Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com
 T: (336)584-1745
 F: (336)584-0145

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)