



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**SALLY BROMFIELD**  
Machine Id  
**[SALLY BROMFIELD] 001 501709-1**  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 710 LE (320 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0063033</b>	MW0063026	MW0048966
Sample Date		Client Info		<b>01 Jan 2024</b>	01 Dec 2023	01 Nov 2023
Machine Age	hrs	Client Info		<b>31795</b>	31039	30336
Oil Age	hrs	Client Info		<b>9950</b>	9194	8491
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	None	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>17</b>	18	16
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m	>18	<b>6</b>	6	6
Copper	ppm	ASTM D5185m	>80	<b>21</b>	24	20
Tin	ppm	ASTM D5185m	>14	<b>4</b>	4	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	8.6	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.6</b>	17.2	17.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>0</b>	0	1
Boron	ppm	ASTM D5185m		<b>38</b>	40	39
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>46</b>	48	46
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>16</b>	13	17
Calcium	ppm	ASTM D5185m		<b>3448</b>	3602	3497
Phosphorus	ppm	ASTM D5185m		<b>6</b>	26	5
Zinc	ppm	ASTM D5185m	10	<b>4</b>	0	6
Sulfur	ppm	ASTM D5185m		<b>2272</b>	2396	2471
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.5</b>	9.2	9.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>8.74</b>	9.48	8.77
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.5</b>	14.7	14.7

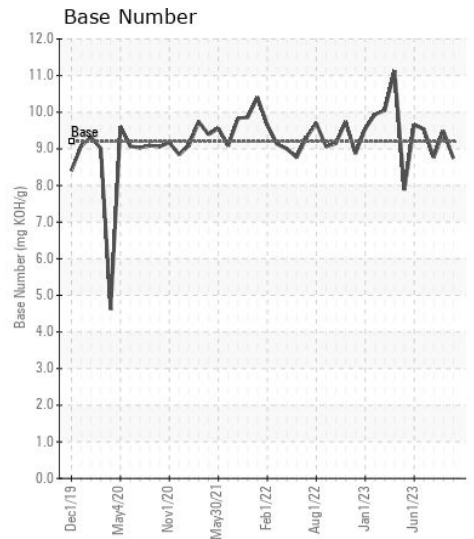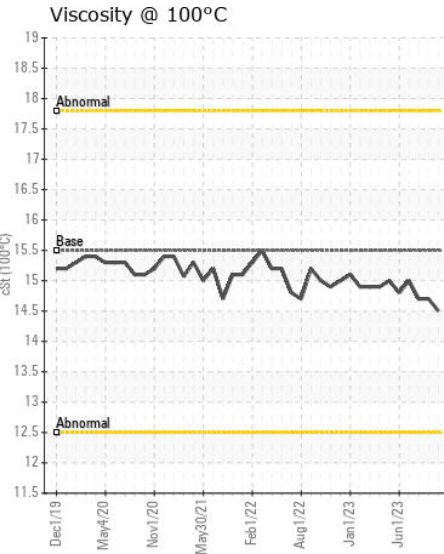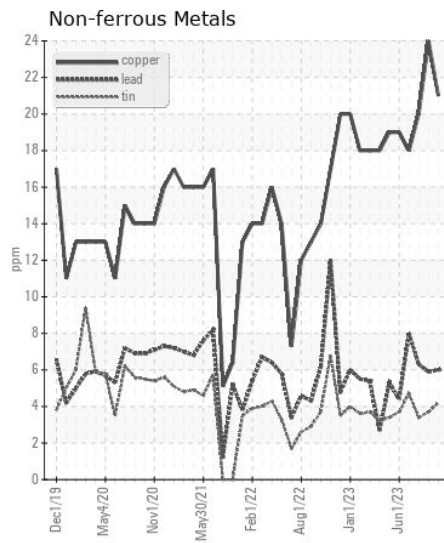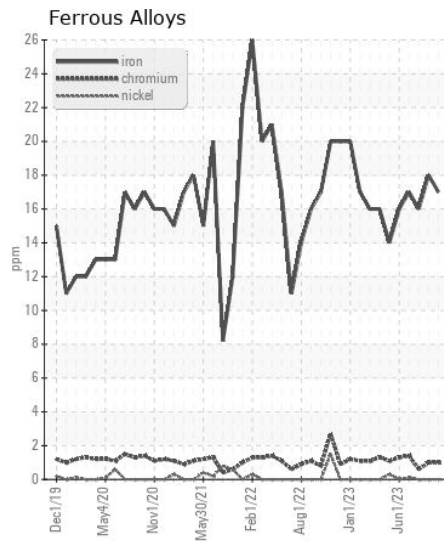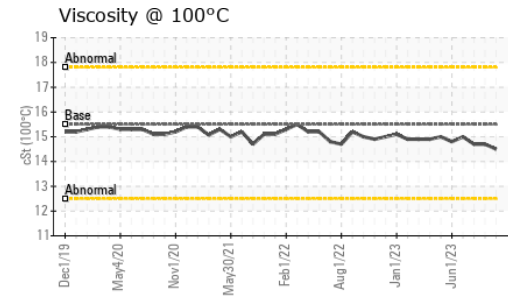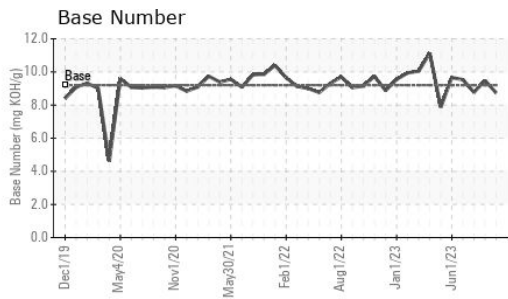

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0063033 **Received** : 09 Jan 2024  
**Lab Number** : 06056001 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10821950 **Diagnostician** : Wes Davis  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003  
 Contact: GLENN ELLIS  
 glen.ellis@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)