



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
[44078]
 Machine Id
SAKAI 3SV59-60153
 Component
Front Unknown Component
 Fluid
JOHN DEERE GL-5 80W90 (36 QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199295	---	---
Sample Date		Client Info		29 Dec 2023	---	---
Machine Age	hrs	Client Info		991	---	---
Oil Age	hrs	Client Info		991	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		387	---	---
Iron	ppm	ASTM D5185m		95	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		3	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		0	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







Moderate concentration of visible dirt/debris present in the sample.

Silicon	ppm	ASTM D5185m		3	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

The condition of the sample is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		13	---	---
Boron	ppm	ASTM D5185m		214	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		60	---	---
Calcium	ppm	ASTM D5185m		117	---	---
Phosphorus	ppm	ASTM D5185m		1080	---	---
Zinc	ppm	ASTM D5185m		111	---	---
Sulfur	ppm	ASTM D5185m		17915	---	---
Visc @ 40°C	cSt	ASTM D445		131	---	---

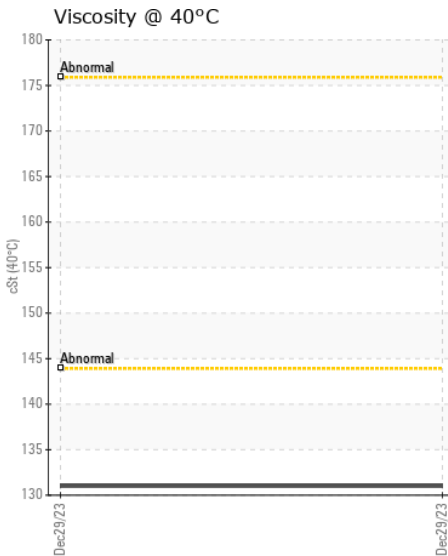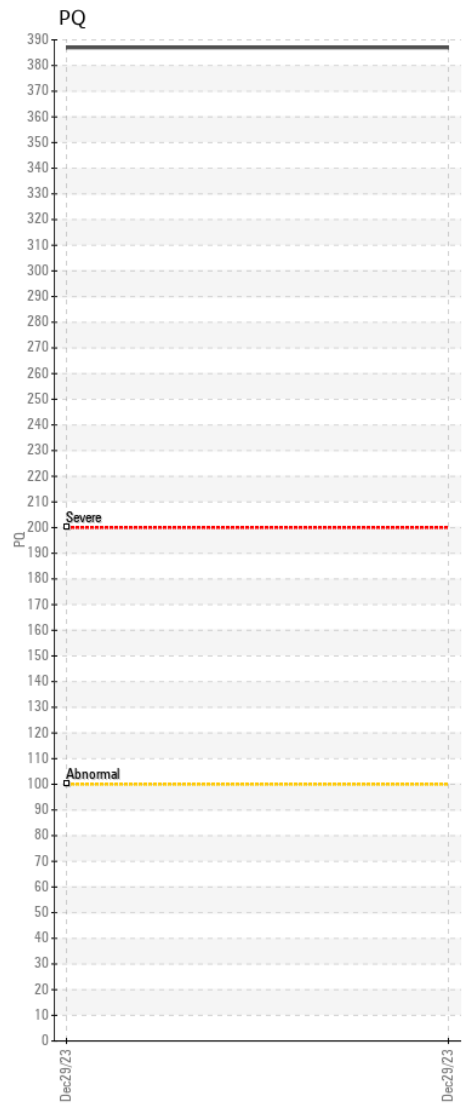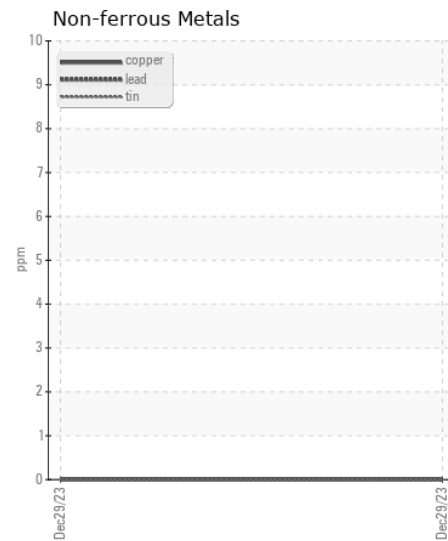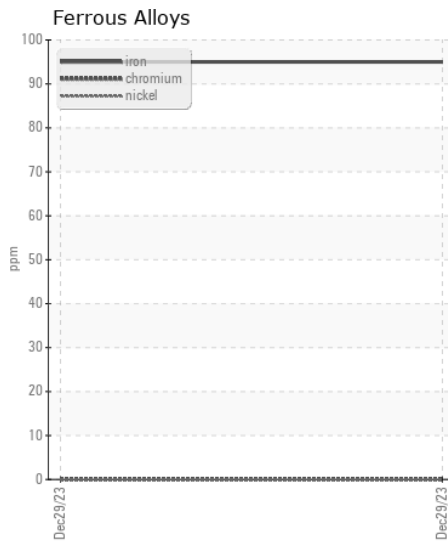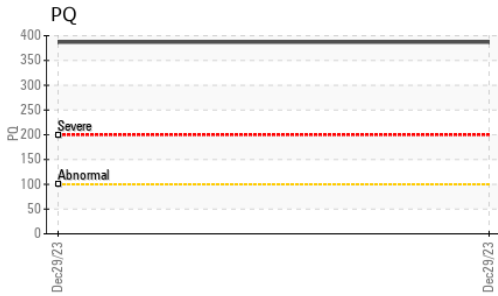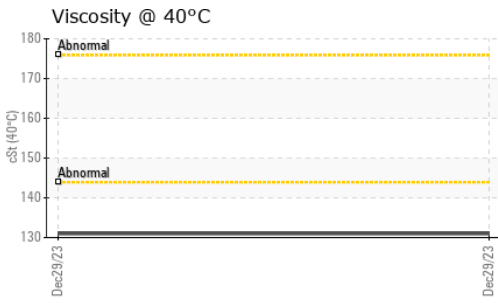

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199295 **Received** : 09 Jan 2024
Lab Number : 06056053 **Diagnosed** : 10 Jan 2024
Unique Number : 10822002 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

T:
 F: (703)631-4715