



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 245G 1FF245GXAMF802160

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195293	JR0166350	JR0138085
Sample Date		Client Info		05 Jan 2024	17 Mar 2023	19 Aug 2022
Machine Age	hrs	Client Info		1450	899	433
Oil Age	hrs	Client Info		0	0	433
Filter Age	hrs	Client Info		0	0	433
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	274	252	180
Iron	ppm	ASTM D5185m	>750	329	300	380
Chromium	ppm	ASTM D5185m	>9	5	4	5
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>40	<1	<1	11
Lead	ppm	ASTM D5185m	>15	0	0	<1
Copper	ppm	ASTM D5185m	>40	1	1	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	MODER	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	26	20	60
Potassium	ppm	ASTM D5185m	>20	4	1	4
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	1	0
Boron	ppm	ASTM D5185m		49	54	60
Barium	ppm	ASTM D5185m		5	6	9
Molybdenum	ppm	ASTM D5185m		0	2	<1
Manganese	ppm	ASTM D5185m		6	5	6
Magnesium	ppm	ASTM D5185m		6	0	4
Calcium	ppm	ASTM D5185m		19	79	18
Phosphorus	ppm	ASTM D5185m		531	503	482
Zinc	ppm	ASTM D5185m		23	52	27
Sulfur	ppm	ASTM D5185m		15589	17919	15278
Visc @ 40°C	cSt	ASTM D445		185	183	185

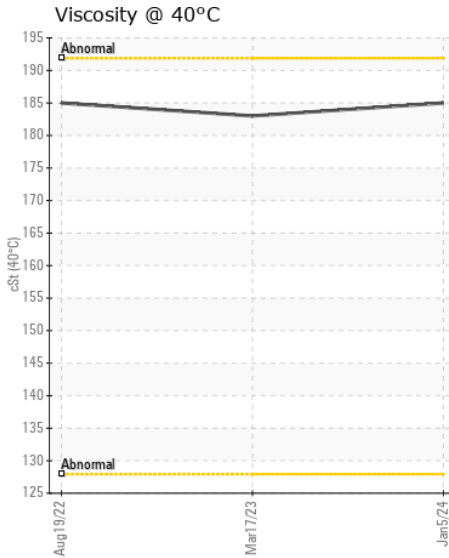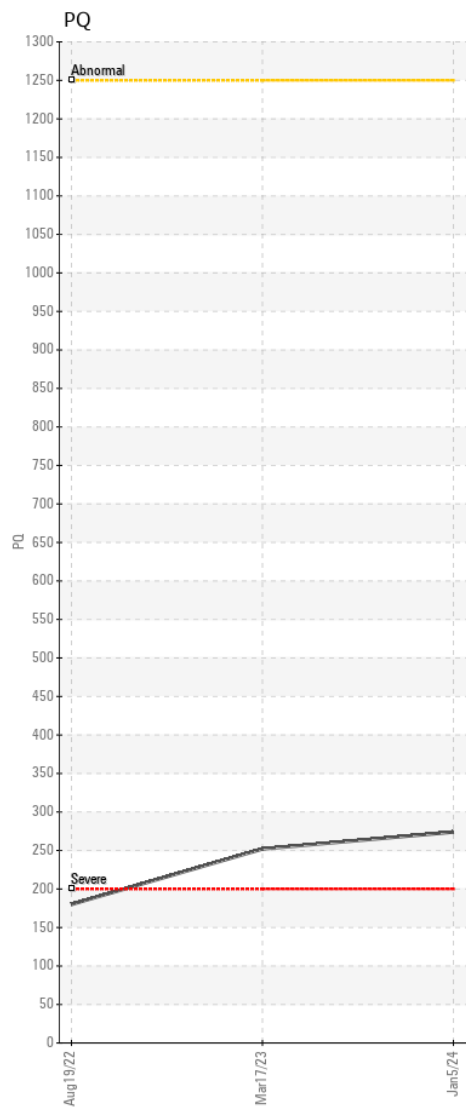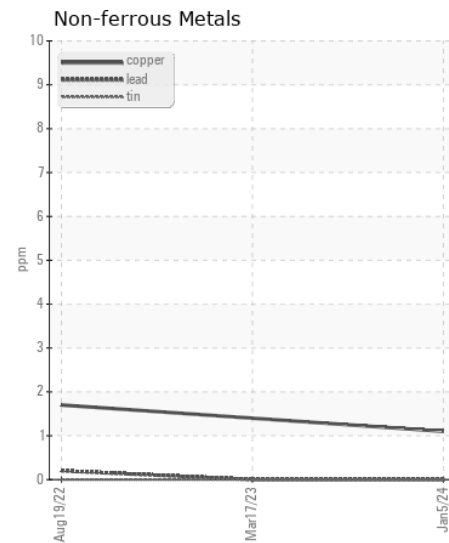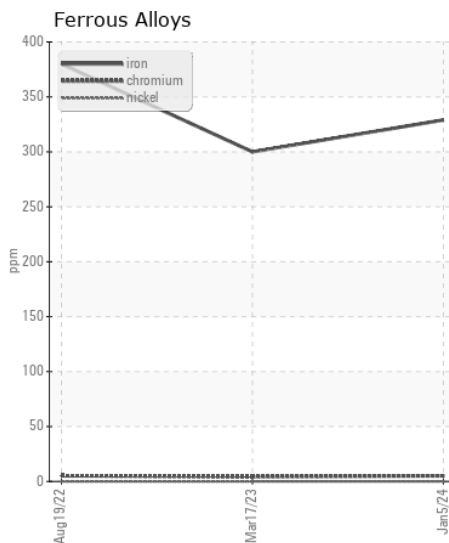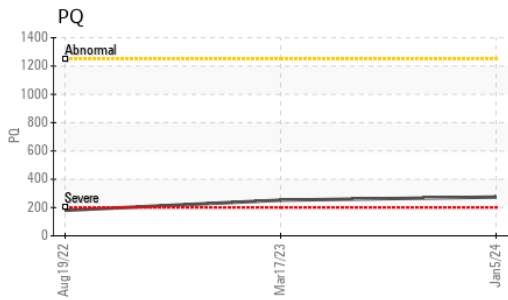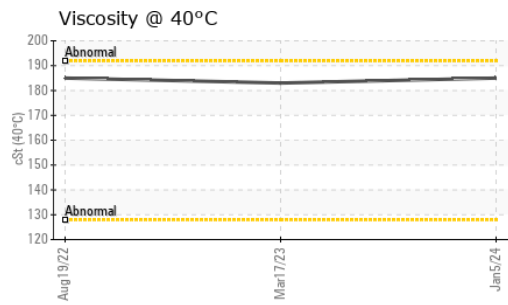

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195293 **Received** : 09 Jan 2024
Lab Number : 06056078 **Diagnosed** : 10 Jan 2024
Unique Number : 10822027 **Diagnostician** : Angela Borella
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com
 T: x:
 F: (540)693-2588

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)