



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A11723]
Machine Id
VOLVO L180H 5446
Component
Rear Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439462	VCP411863	VCP399139
Sample Date		Client Info		23 Dec 2023	10 Jul 2023	03 Feb 2023
Machine Age	hrs	Client Info		6982	6010	5041
Oil Age	hrs	Client Info		0	2000	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	27	19	23
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	2	0
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>120	2	2	1
Tin	ppm	ASTM D5185m	>20	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	13	11
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m		132	126	142
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		1	1	1
Magnesium	ppm	ASTM D5185m		18	16	16
Calcium	ppm	ASTM D5185m		4110	4248	4186
Phosphorus	ppm	ASTM D5185m		1444	1377	1351
Zinc	ppm	ASTM D5185m		1717	1742	1701
Sulfur	ppm	ASTM D5185m		4397	5365	4103
Visc @ 40°C	cSt	ASTM D445	55	42.8	42.6	42.4

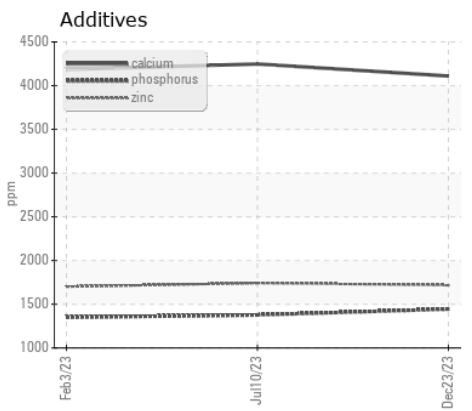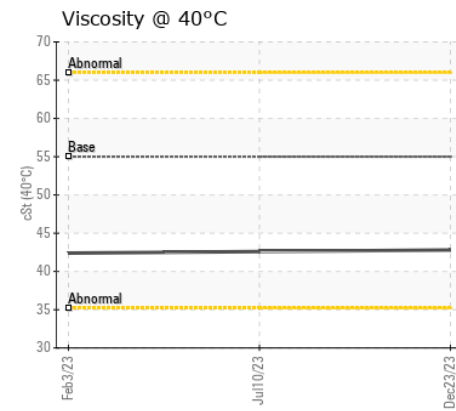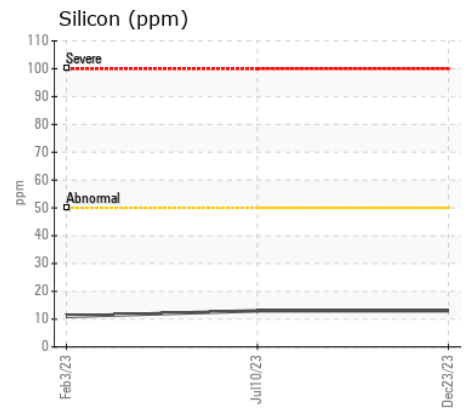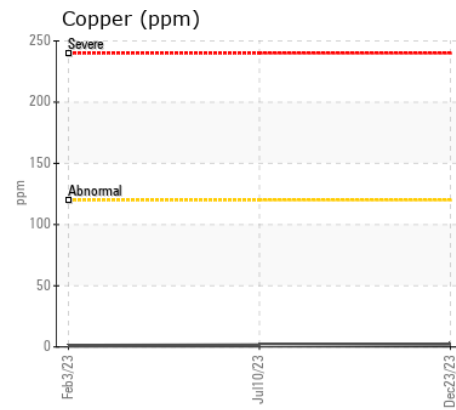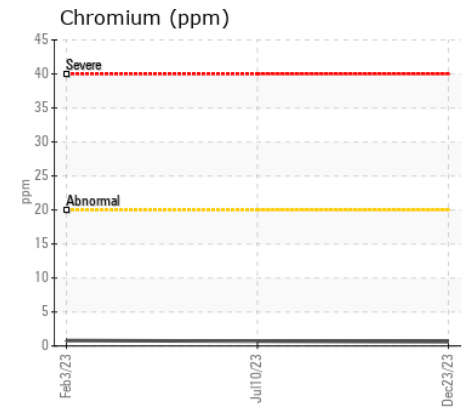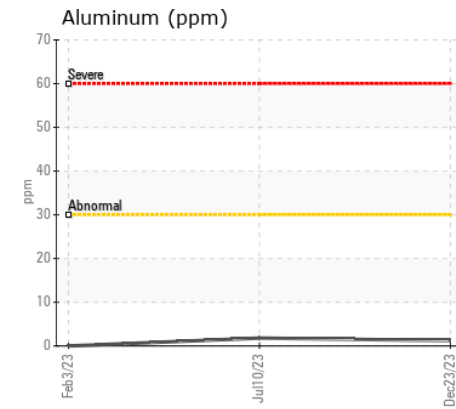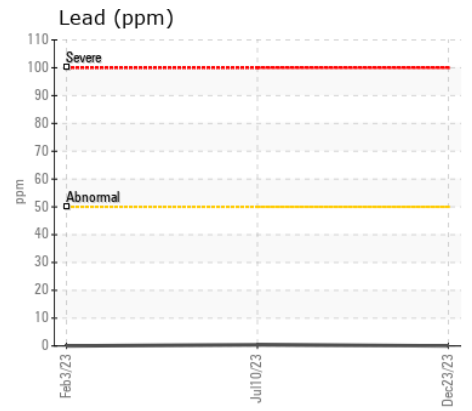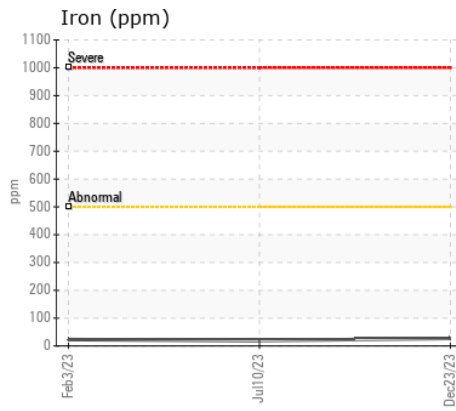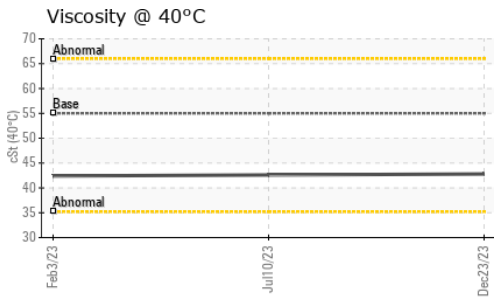

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439462 **Received** : 09 Jan 2024
Lab Number : 06056081 **Diagnosed** : 10 Jan 2024
Unique Number : 10822030 **Diagnostician** : Wes Davis
Test Package : MOB 1

COVANTA METAL MARKETING LLC
 500 MIDDLE DR
 FAIRLESS HILLS, PA
 US 19030
 Contact: J.P.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: