



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-4003**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014039</b>	RPL0010453	RPL0005076
Sample Date		Client Info		<b>11 Dec 2023</b>	29 Apr 2023	20 Dec 2022
Machine Age	mls	Client Info		<b>271382</b>	225467	196267
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>51</b>	11	17
Chromium	ppm	ASTM D5185m	>20	<b>5</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	3	4
Lead	ppm	ASTM D5185m	>40	<b>3</b>	0	2
Copper	ppm	ASTM D5185m	>330	<b>3</b>	<1	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	5	6
Potassium	ppm	ASTM D5185m	>20	<b>14</b>	10	13
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.4</b>	9.6	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>28.5</b>	20.8	22.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	3
Boron	ppm	ASTM D5185m		<b>12</b>	28	25
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>13</b>	10	16
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>765</b>	719	690
Calcium	ppm	ASTM D5185m	2900	<b>1404</b>	1422	1411
Phosphorus	ppm	ASTM D5185m	1100	<b>755</b>	644	715
Zinc	ppm	ASTM D5185m	1200	<b>894</b>	774	867
Sulfur	ppm	ASTM D5185m	4000	<b>3052</b>	2686	2998
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.4</b>	17.2	18.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	<b>4.2</b>	4.8	5.9
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.3</b>	11.2	11.2

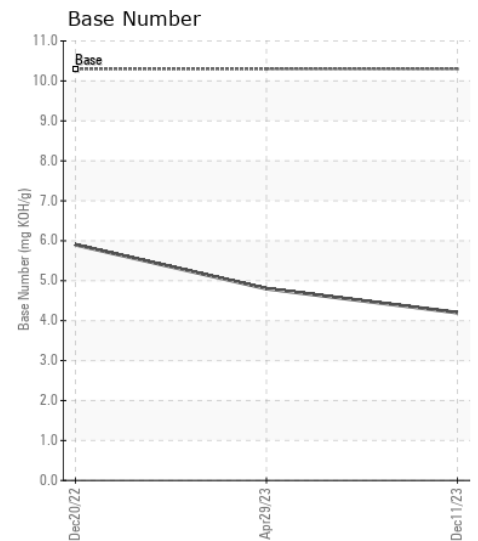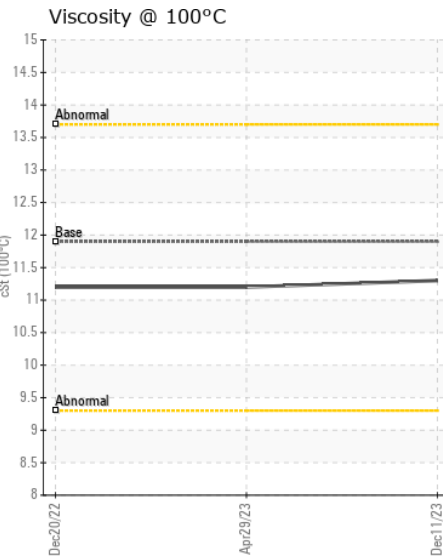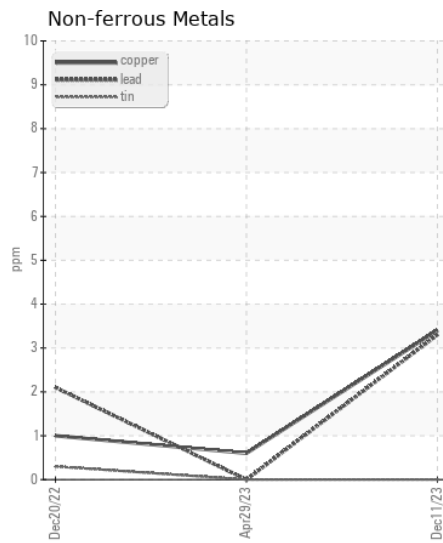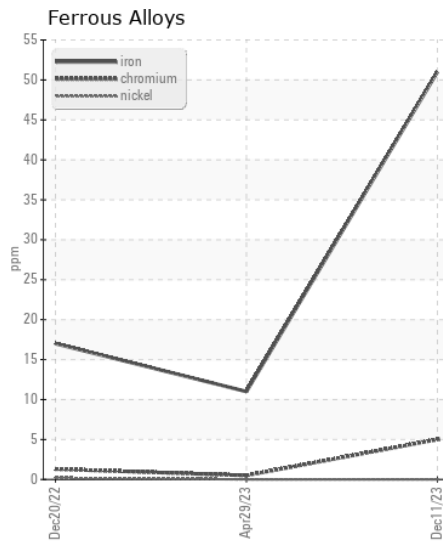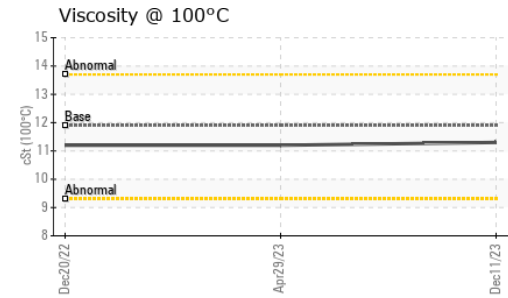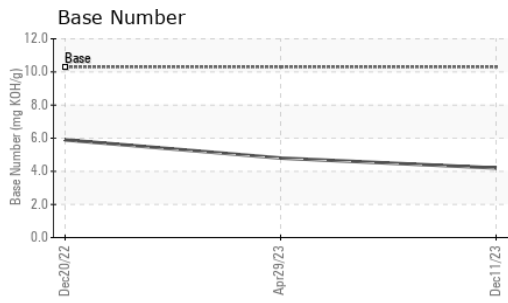

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0014039 **Received** : 10 Jan 2024  
**Lab Number** : 06056132 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822081 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026  
 Contact: RODNEY BRIGGS  
 briggs@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: