



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-2988**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal.

## CONTAMINATION


Elemental level of silicon (Si) above normal indicating ingress of seal material.

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014007</b>	RPL0010981	---
Sample Date		Client Info		<b>18 Dec 2023</b>	29 Sep 2023	---
Machine Age	mths	Client Info		<b>0</b>	14539	---
Oil Age	mths	Client Info		<b>4</b>	0	---
Filter Age	mths	Client Info		<b>4</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>100	<b>9</b>	<1	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>25	<b>▲ 52</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	2	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	5.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.0</b>	20.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185m		<b>78</b>	78	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>47</b>	50	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>522</b>	516	---
Calcium	ppm	ASTM D5185m		<b>1707</b>	1501	---
Phosphorus	ppm	ASTM D5185m	1260	<b>778</b>	755	---
Zinc	ppm	ASTM D5185m	1400	<b>926</b>	879	---
Sulfur	ppm	ASTM D5185m		<b>2632</b>	2506	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.9</b>	17.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>9.5</b>	10.3	---
Visc @ 100°C	cSt	ASTM D445	11.1	<b>10.8</b>	11.4	---


▲ Silicon (ppm)

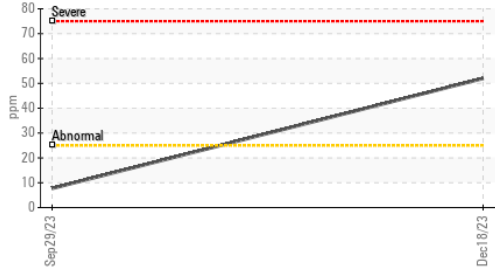


Ferrous Alloys

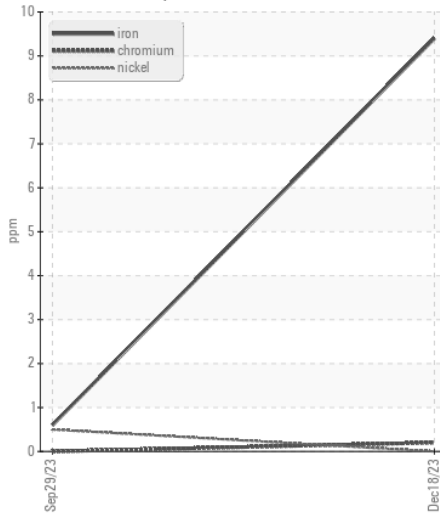


Base Number

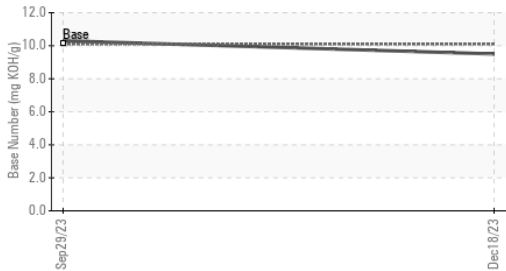


Non-ferrous Metals

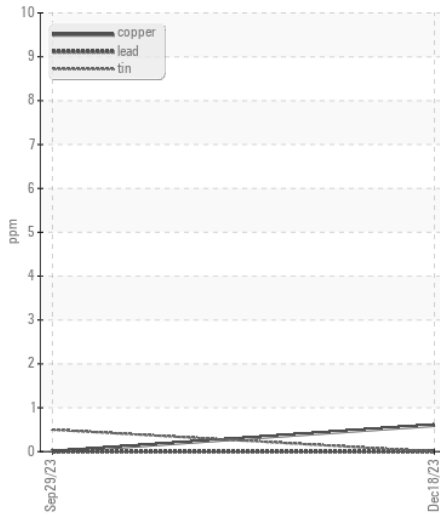


Viscosity @ 100°C

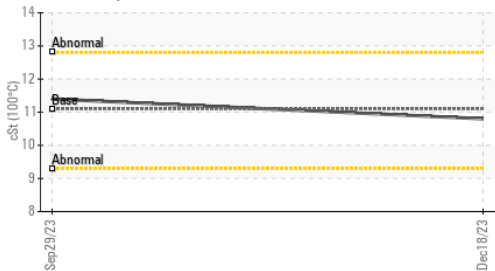

Viscosity @ 100°C

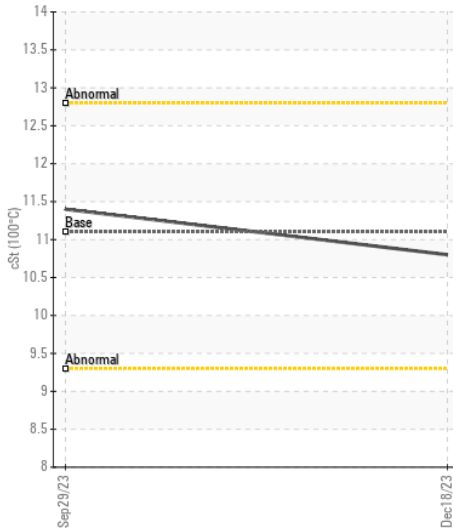

Base Number

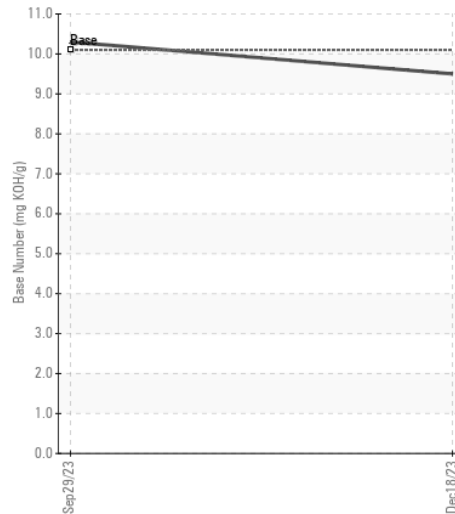

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0014007 **Received** : 10 Jan 2024  
**Lab Number** : 06056202 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822151 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**RTL PACLEASE - 7001 - Houston**

6300 N. Loop East  
Houston, TX  
US 77026

Contact: RODNEY BRIGGS  
briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: