



PacLease

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**857-4818**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014019</b>	RPL0010296	RPL0004956
Sample Date		Client Info		<b>15 Dec 2023</b>	14 Aug 2023	09 Nov 2022
Machine Age	hrs	Client Info		<b>1900</b>	0	21073
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>15</b>	63	71
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>9</b>	56	120
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	12	35
Tin	ppm	ASTM D5185m	>15	<b>0</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	14	18
Potassium	ppm	ASTM D5185m	>20	<b>25</b>	144	333
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	10.7	11.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.5</b>	23.4	24.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	10	6
Boron	ppm	ASTM D5185m		<b>43</b>	24	26
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>43</b>	10	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	2	3
Magnesium	ppm	ASTM D5185m		<b>542</b>	778	739
Calcium	ppm	ASTM D5185m		<b>1664</b>	1506	1426
Phosphorus	ppm	ASTM D5185m	1260	<b>762</b>	777	743
Zinc	ppm	ASTM D5185m	1400	<b>911</b>	903	846
Sulfur	ppm	ASTM D5185m		<b>2680</b>	3829	3594
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.7</b>	18.2	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>5.6</b>	5.8	6.1
Visc @ 100°C	cSt	ASTM D445	11.1	<b>11.2</b>	11.7	11.7

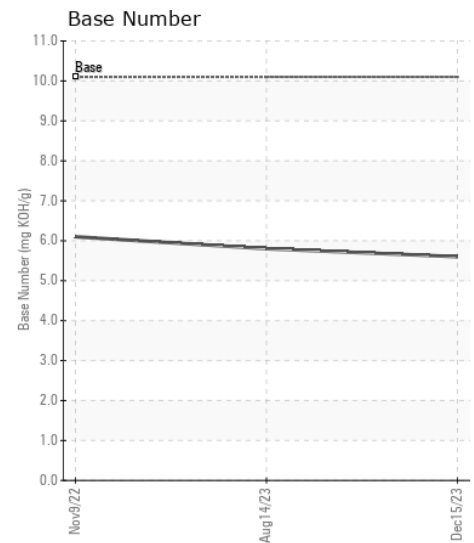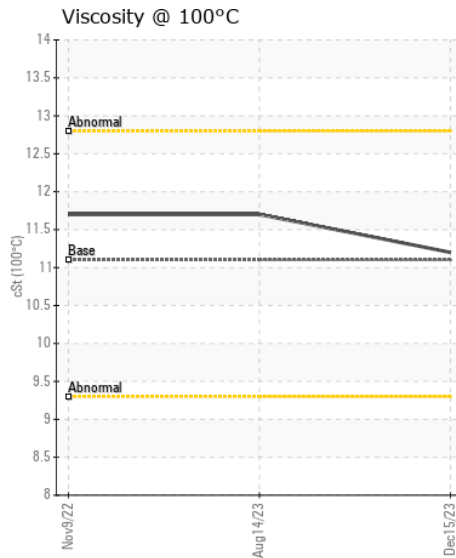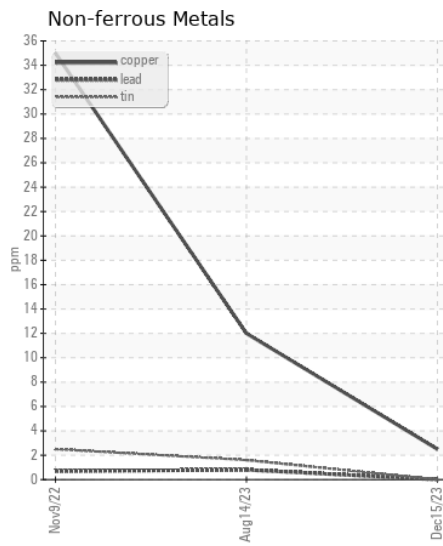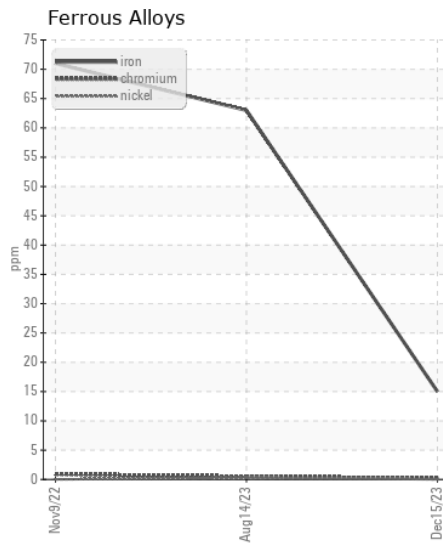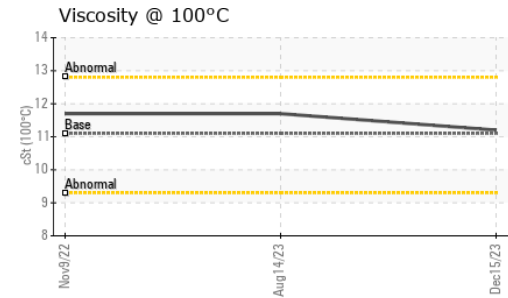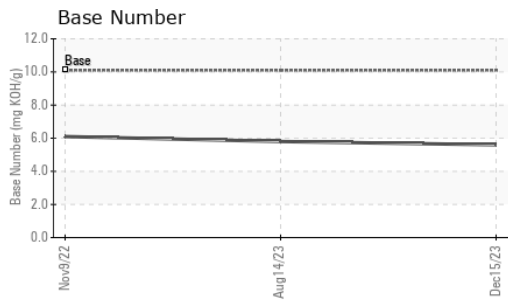

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0014019 **Received** : 10 Jan 2024  
**Lab Number** : 06056232 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822181 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026  
 Contact: RODNEY BRIGGS  
 briggs@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: