



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-4911**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014581</b>	RPL0010397	RPL0010471
Sample Date		Client Info		<b>30 Nov 2023</b>	12 May 2023	21 Apr 2023
Machine Age	mls	Client Info		<b>2544</b>	54952	53909
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>35</b>	83	75
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>12</b>	38	42
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>5</b>	11	10
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>10</b>	15	14
Potassium	ppm	ASTM D5185m	>20	<b>38</b>	127	102
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	13.3	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	30.0	26.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	9	6
Boron	ppm	ASTM D5185m		<b>28</b>	15	15
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>8</b>	11	10
Manganese	ppm	ASTM D5185m		<b>0</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>751</b>	698	726
Calcium	ppm	ASTM D5185m		<b>1389</b>	1470	1472
Phosphorus	ppm	ASTM D5185m	1260	<b>757</b>	690	686
Zinc	ppm	ASTM D5185m	1400	<b>861</b>	810	826
Sulfur	ppm	ASTM D5185m		<b>3257</b>	3228	2779
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.5</b>	26.9	24.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>6.1</b>	4.4	3.4
Visc @ 100°C	cSt	ASTM D445	11.1	<b>11.4</b>	12.0	11.8

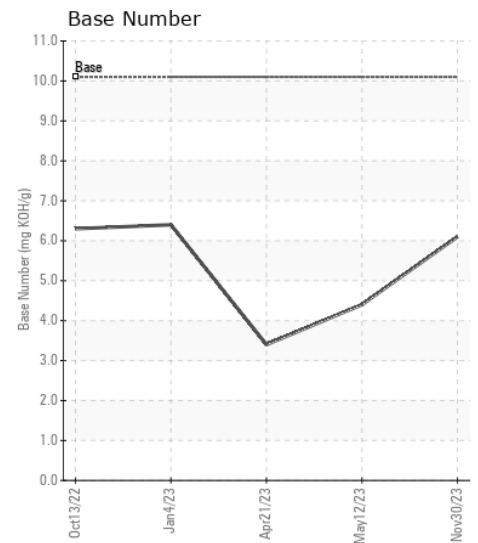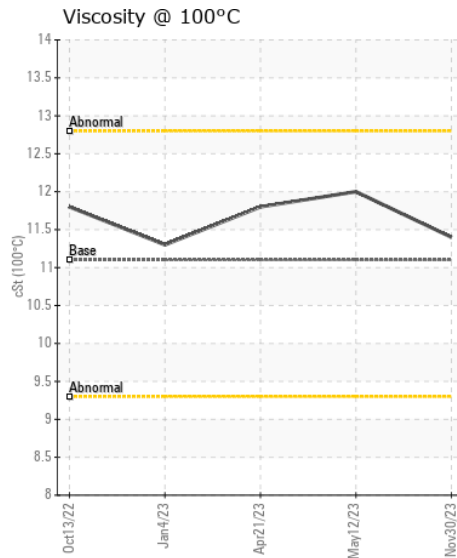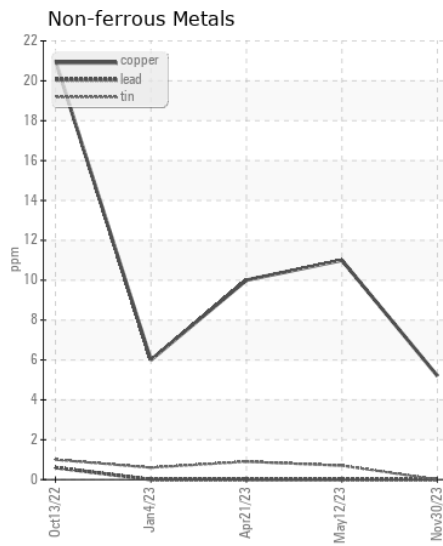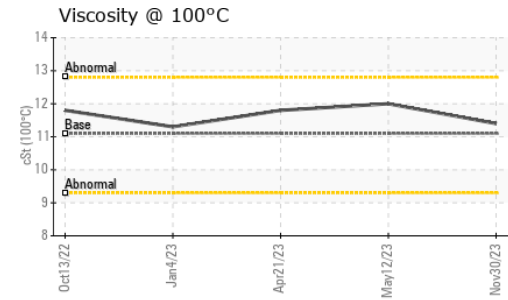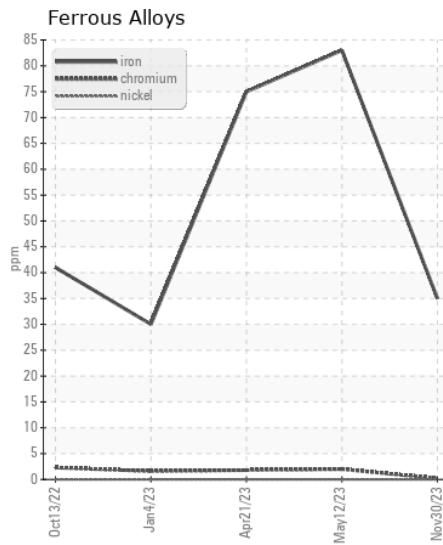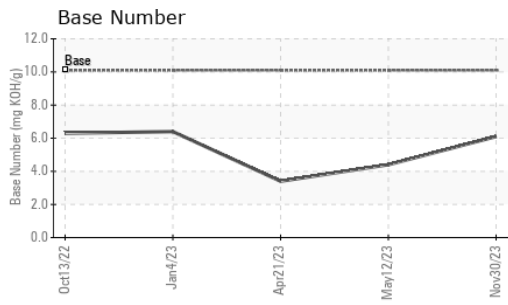

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0014581 **Received** : 10 Jan 2024  
**Lab Number** : 06056234 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822183 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026

Contact: RODNEY BRIGGS  
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: