



PacLease

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**857-3866**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0013994</b>	RPL0010135	RPL0005485
Sample Date		Client Info		<b>21 Dec 2023</b>	01 Jun 2023	25 Oct 2022
Machine Age	hrs	Client Info		<b>10427</b>	236686	206672
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>22</b>	37	31
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	8	8
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	4
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	7	7
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	25	6
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.5</b>	12.4	13.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.5</b>	30.6	33.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	11	4
Boron	ppm	ASTM D5185m		<b>26</b>	29	24
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>41</b>	17	11
Manganese	ppm	ASTM D5185m		<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>552</b>	724	650
Calcium	ppm	ASTM D5185m		<b>1694</b>	1419	1377
Phosphorus	ppm	ASTM D5185m	1260	<b>754</b>	724	695
Zinc	ppm	ASTM D5185m	1400	<b>936</b>	886	825
Sulfur	ppm	ASTM D5185m		<b>2531</b>	3496	3387
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>26.9</b>	30.7	36.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>7.2</b>	4.2	▲ 3.1
Visc @ 100°C	cSt	ASTM D445	11.1	<b>11.0</b>	11.5	11.7

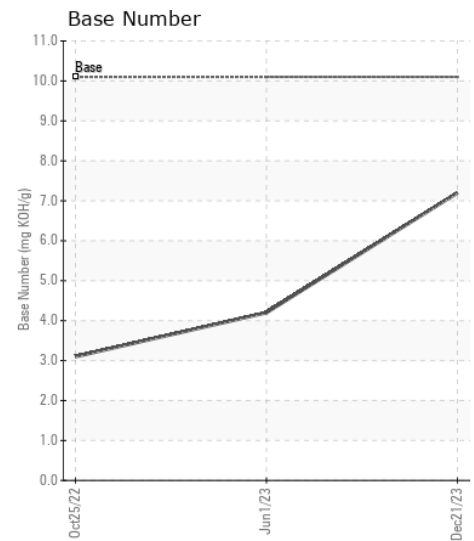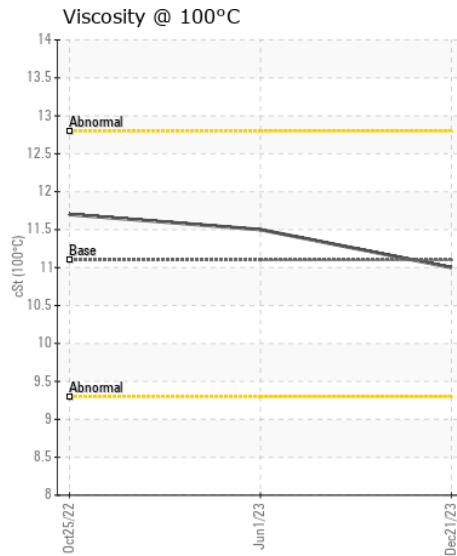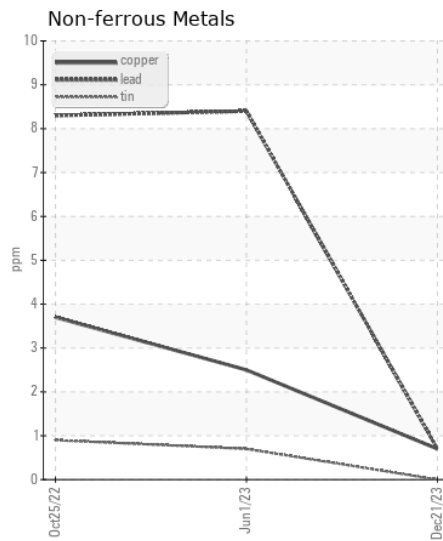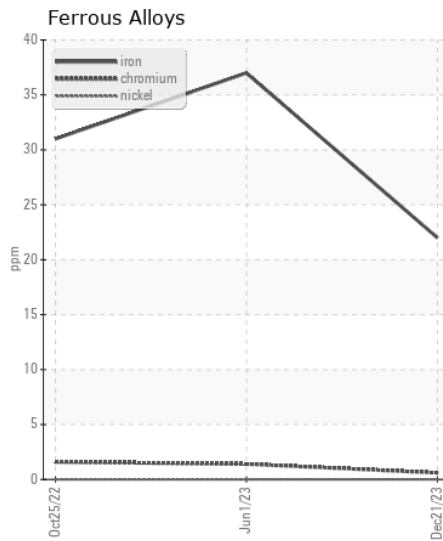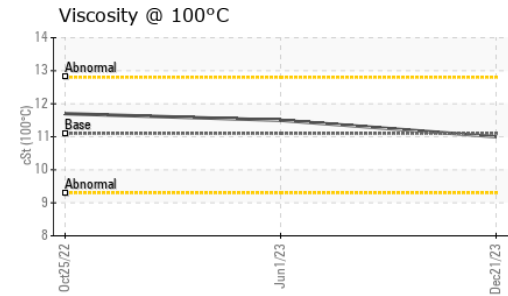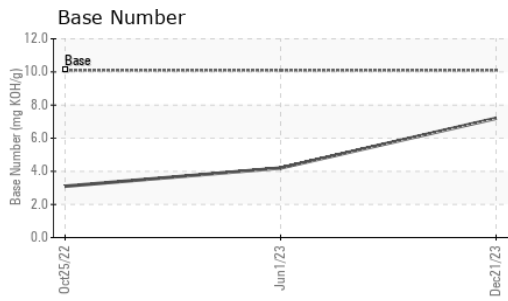

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0013994 **Received** : 10 Jan 2024  
**Lab Number** : 06056235 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822184 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026  
 Contact: RODNEY BRIGGS  
 briggs@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: