



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[646159 DIPRO]
Machine Id
CATERPILLAR 982M LLSU02686
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452300	VCP401161	VCP411765
Sample Date		Client Info		28 Dec 2023	14 Sep 2023	11 Jul 2023
Machine Age	hrs	Client Info		12902	11568	10846
Oil Age	hrs	Client Info		500	500	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	32	26	14
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>25	6	4	4
Lead	ppm	ASTM D5185m	>40	8	4	1
Copper	ppm	ASTM D5185m	>330	2	2	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	▲ 34	4
Potassium	ppm	ASTM D5185m	>20	<1	1	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.6	1	0.5
Nitration	Abs/cm	*ASTM D7624	>20	11.6	8.7	7.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.3	20.1	19.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	1
Boron	ppm	ASTM D5185m	2.5	6	0	4
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	70	58	53
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	821	911	907
Calcium	ppm	ASTM D5185m	2057	1336	1032	1099
Phosphorus	ppm	ASTM D5185m	935	1040	983	1012
Zinc	ppm	ASTM D5185m	1223	1293	1200	1248
Sulfur	ppm	ASTM D5185m	4079	3161	2987	3668
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.9	15.6	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	6.6	8.1	9.4
Visc @ 100°C	cSt	ASTM D445	15.0	13.3	13.9	14.0

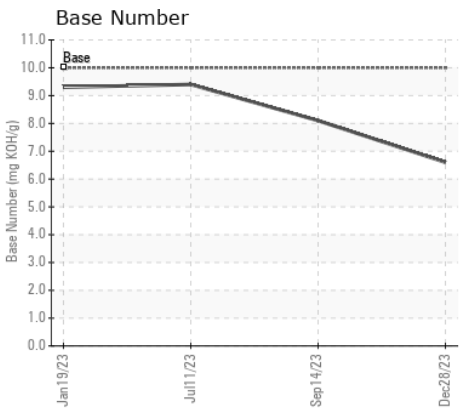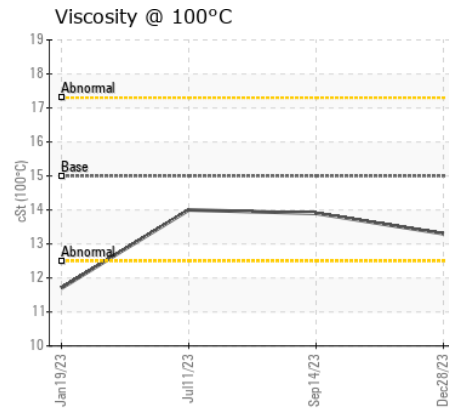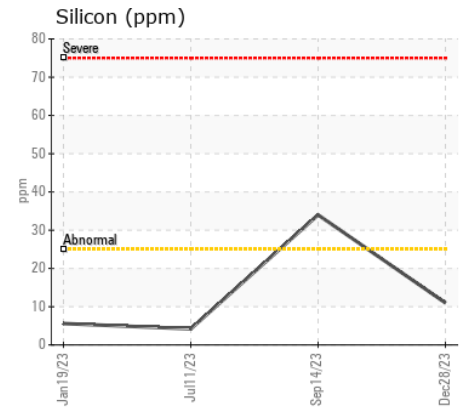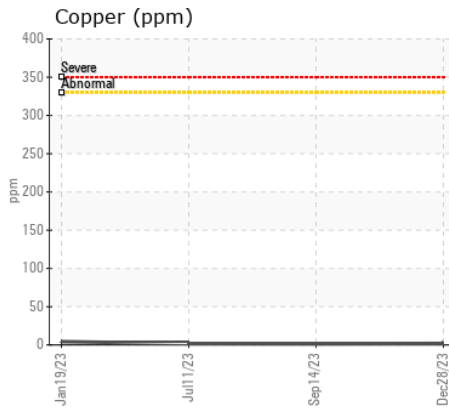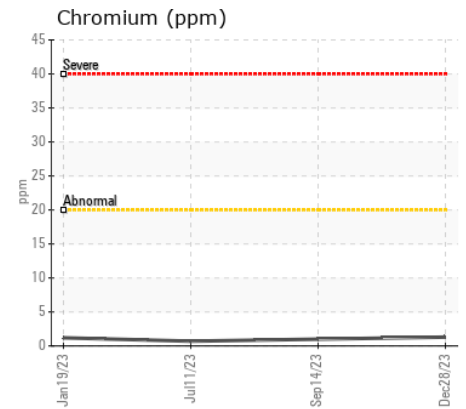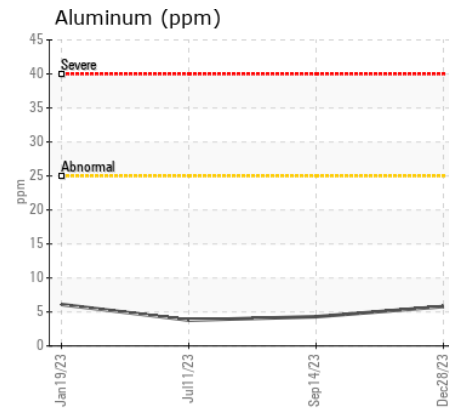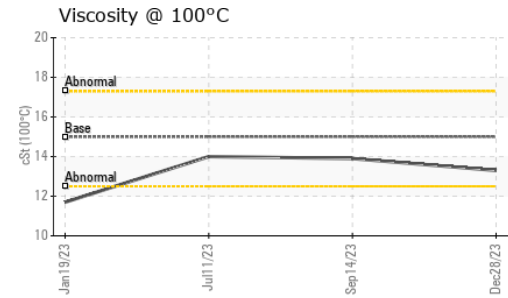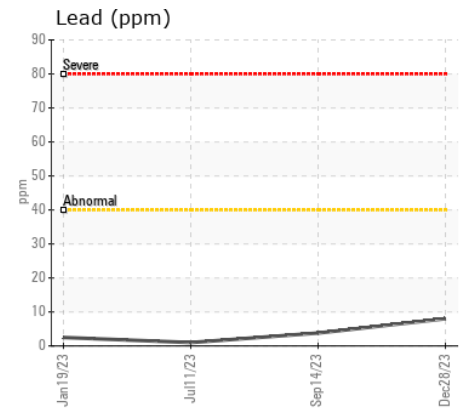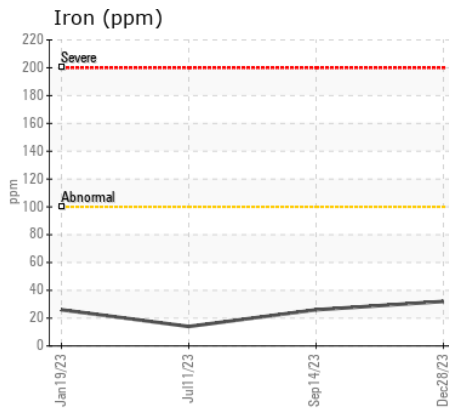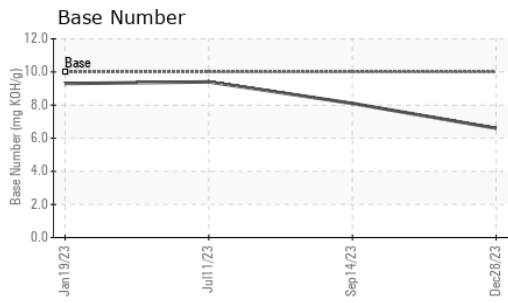

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP452300 **Received** : 10 Jan 2024
Lab Number : 06056465 **Diagnosed** : 11 Jan 2024
Unique Number : 10822414 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

ALTA EQUIPMENT COMPANY - METRO WEST
 56195 PONTIAC TRAIL
 NEW HUDSON, MI
 US 48165
 Contact: PAUL CONZ
 paul.conz@altg.com
 T: (313)348-8861
 F: (248)356-2029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)