



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 9 - Marietta**  
Machine Id  
**CATERPILLAR CAT0326FVWGH00611**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- QTS)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0042168</b>	LECP142615	LEC014859
Sample Date		Client Info		<b>29 Dec 2023</b>	23 Apr 2019	26 Jun 2018
Machine Age	hrs	Client Info		<b>4558</b>	2296	1500
Oil Age	hrs	Client Info		<b>500</b>	757	0
Filter Age	hrs	Client Info		<b>500</b>	757	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

## WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>45</b>	19	20
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>▲ 35</b>	12	12
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>120	<b>7</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	8.5	7.
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	22.2	20.
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	5
Boron	ppm	ASTM D5185m	0	<b>34</b>	34	58
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>38</b>	35	39
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>512</b>	441	547
Calcium	ppm	ASTM D5185m		<b>1605</b>	1519	1724
Phosphorus	ppm	ASTM D5185m		<b>772</b>	643	808
Zinc	ppm	ASTM D5185m		<b>914</b>	765	1105
Sulfur	ppm	ASTM D5185m		<b>2409</b>	2730	2726
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.1</b>	21.3	18.
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>9.3</b>	9.1	11.18
Visc @ 100°C	cSt	ASTM D445	14	<b>12.9</b>	12.9	13.38


▲ Aluminum (ppm)

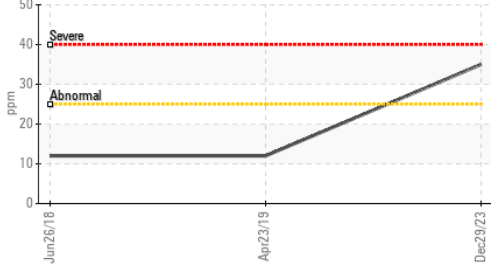


Ferrous Alloys

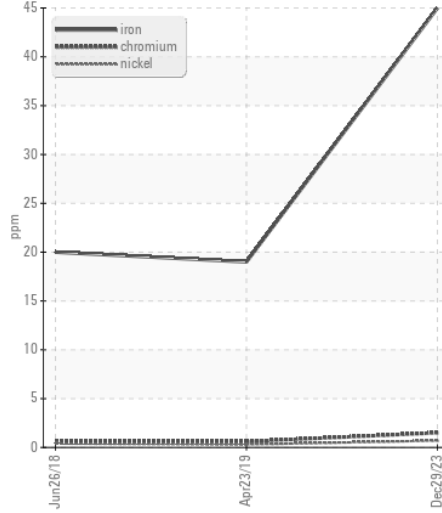


Base Number

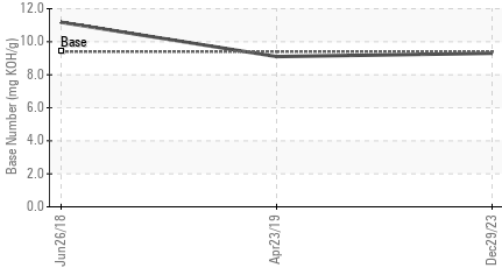


Non-ferrous Metals

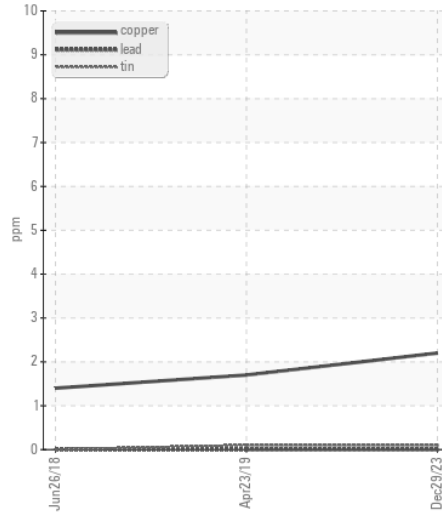


Viscosity @ 100°C

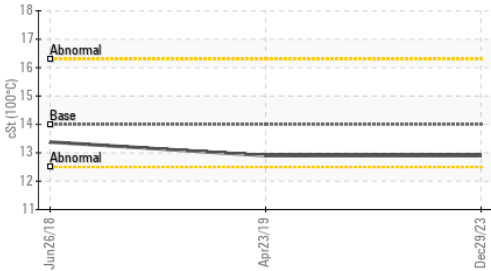

Viscosity @ 100°C

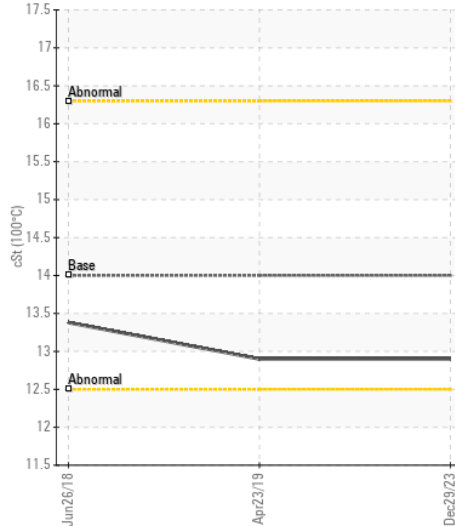

Base Number

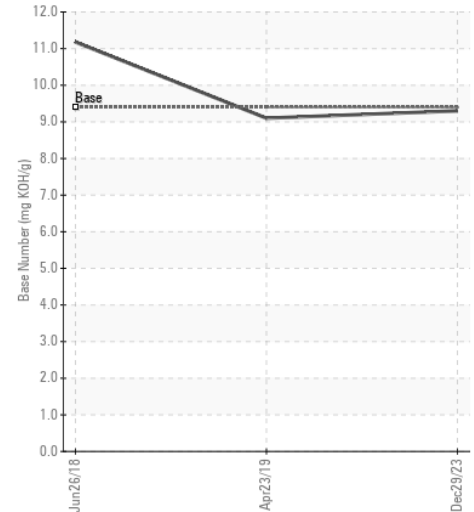

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0042168 **Received** : 10 Jan 2024  
**Lab Number** : 06056533 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822482 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CHISLER INC.**  
 153 BLUE GOOSE RD.  
 FAIRVIEW, WV  
 US 26570

Contact: RICHARD SYPOLT  
 richard.sypolt@gmail.com

T: (304)798-3202  
 F: (304)798-3206