



Built for a lifetime™

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id
KAESER ASD 40 8267386 (S/N 1051)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KCPA010187	---	---
Sample Date		Client Info		14 Dec 2023	---	---
Machine Age	hrs	Client Info		1173	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>3	0	---	---
Titanium	ppm	ASTM D5185m	>3	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>50	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is a moderate amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>25	<1	---	---
Potassium	ppm	ASTM D5185m	>20	20	---	---
Water	%	ASTM D6304	>0.05	0.012	---	---
ppm Water	ppm	ASTM D6304	>500	121	---	---
Particles >4µm		ASTM D7647		10115	---	---
Particles >6µm		ASTM D7647	>1300	▲ 1770	---	---
Particles >14µm		ASTM D7647	>80	▲ 85	---	---
Particles >21µm		ASTM D7647	>20	19	---	---
Particles >38µm		ASTM D7647	>4	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	---/17/13	▲ 21/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		11	---	---
Boron	ppm	ASTM D5185m	0	0	---	---
Barium	ppm	ASTM D5185m	90	0	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	100	69	---	---
Calcium	ppm	ASTM D5185m	0	1	---	---
Phosphorus	ppm	ASTM D5185m	0	4	---	---
Zinc	ppm	ASTM D5185m	0	<1	---	---
Sulfur	ppm	ASTM D5185m	23500	18033	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.33	---	---
Visc @ 40°C	cSt	ASTM D445	45	44.0	---	---

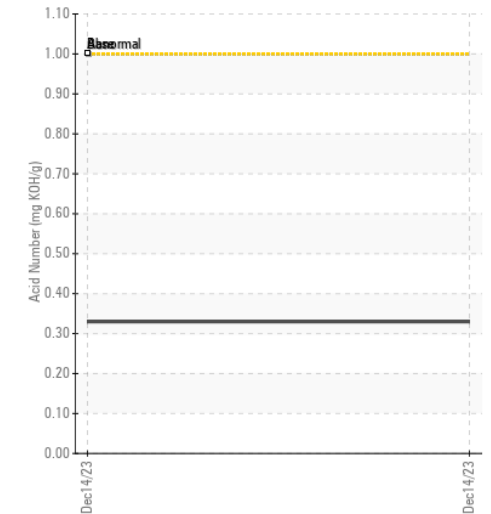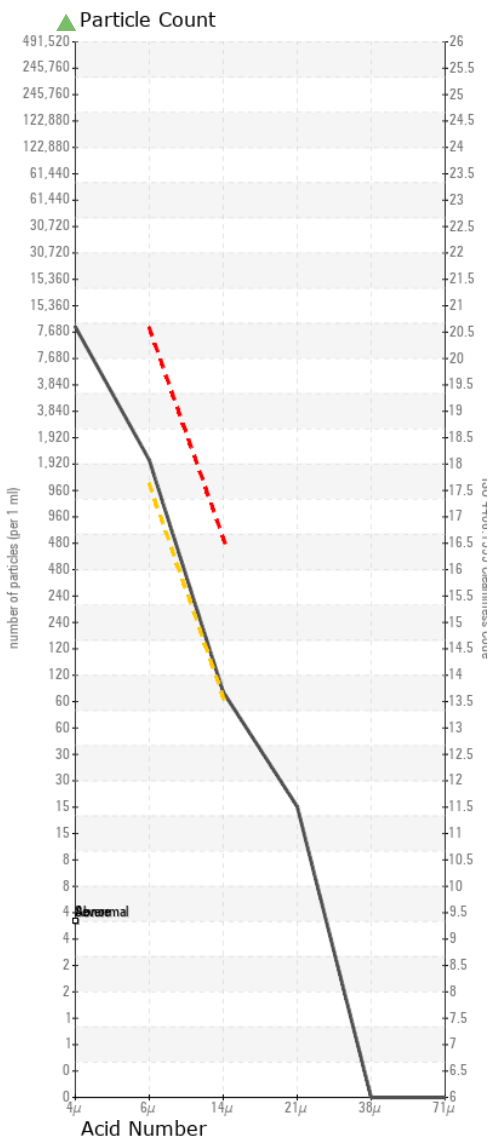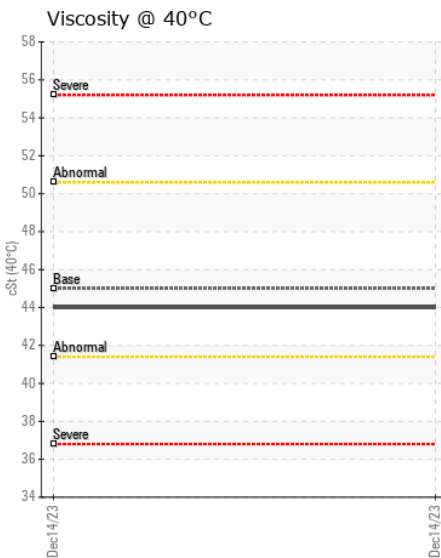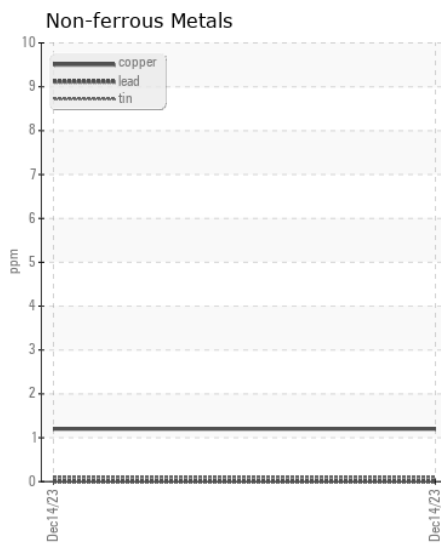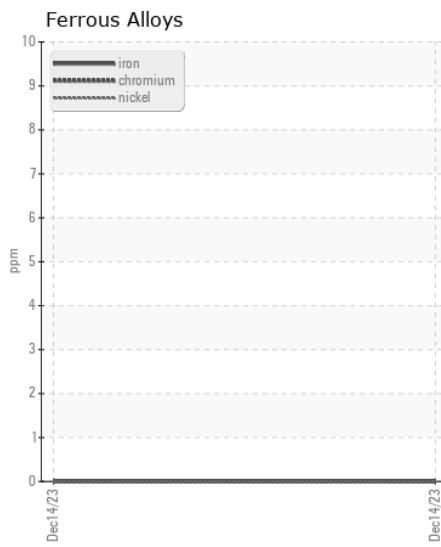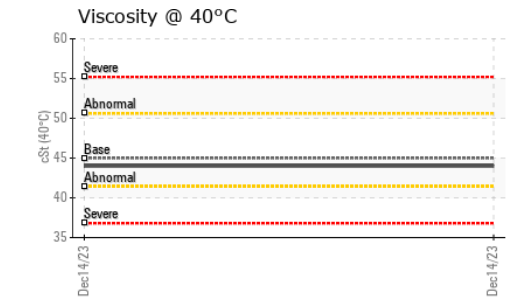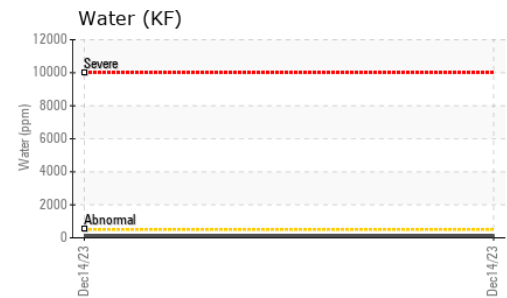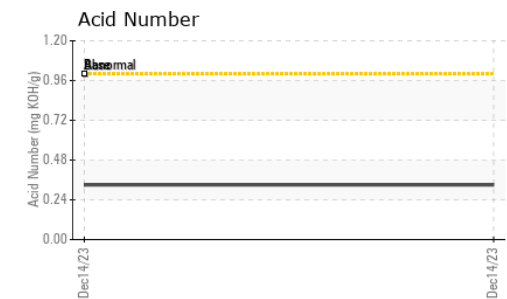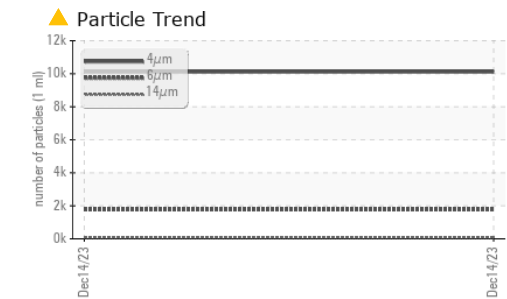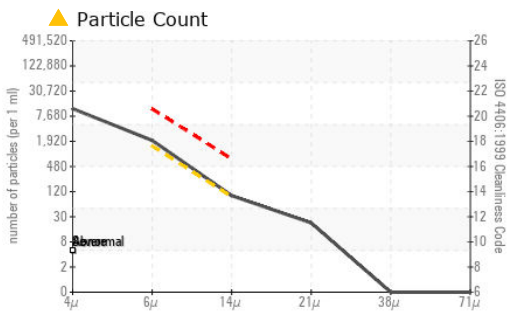

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA010187 **Received** : 10 Jan 2024
Lab Number : 06056699 **Tested** : 11 Jan 2024
Unique Number : 10822648 **Diagnosed** : 11 Jan 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

ROCKY MOUNTAIN WATERJET
 2218 4TH AVE
 GREELEY, CO
 US 80631
 Contact: SERVICE MANAGER
 griz@rmwal.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)