



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NOT GIVEN LH0272762 (S/N NO INFO ON SIF/BOTTLE)

Component
Left Final Drive

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.
 Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0272762	---	---
Sample Date		Client Info		09 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>500	62	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	6	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m	>170	0	---	---
Boron	ppm	ASTM D5185m	400	1	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	12	3	---	---
Calcium	ppm	ASTM D5185m	150	63	---	---
Phosphorus	ppm	ASTM D5185m	1650	897	---	---
Zinc	ppm	ASTM D5185m	125	6	---	---
Sulfur	ppm	ASTM D5185m	22500	24775	---	---
Visc @ 40°C	cSt	ASTM D445	143	123	---	---

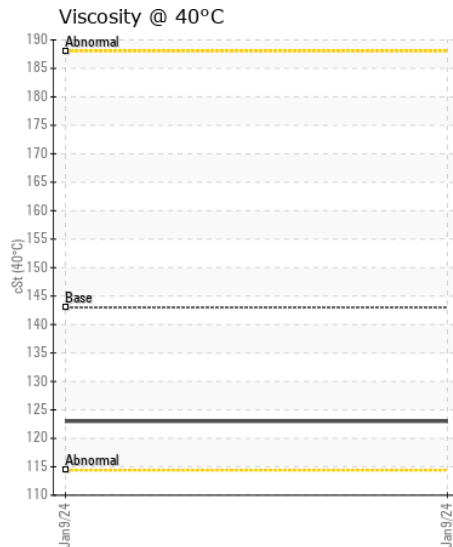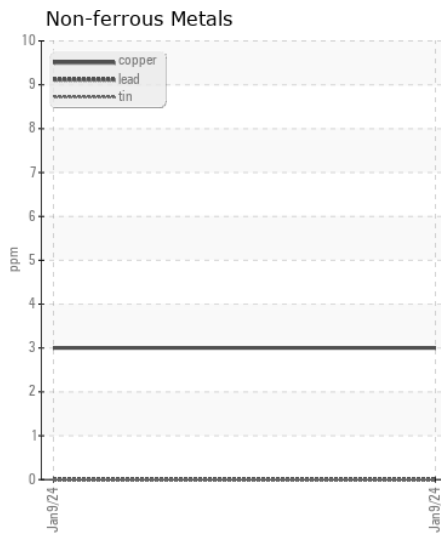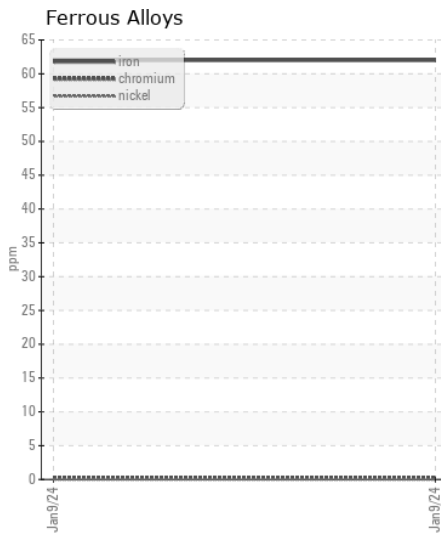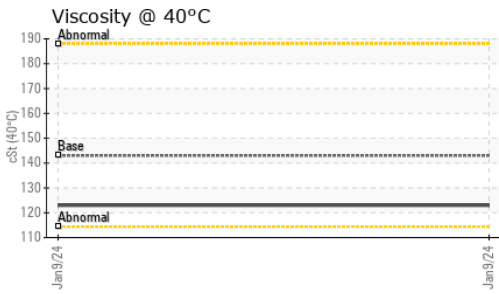

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0272762 **Received** : 10 Jan 2024
Lab Number : 06057011 **Diagnosed** : 11 Jan 2024
Unique Number : 10822960 **Diagnostician** : Wes Davis
Test Package : CONST

AMERICAN STATE EQUIPMENT CO.
 2400 NORTH 14TH AVENUE
 WAUSAU, WI
 US 54401
 Contact: CHRIS BARTNIK
 cbartnik@amstate.com
 T: (715)675-6900
 F: (715)675-9748

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)