



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
912 - 2
Component
Rear Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION










The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0032811	DC0021037	DC0015176
Sample Date		Client Info		09 Jan 2024	06 Mar 2022	12 Oct 2021
Machine Age	mls	Client Info		128831	112060	107724
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	41	9	29
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	<1
Lead	ppm	ASTM D5185m	>25	0	<1	<1
Copper	ppm	ASTM D5185m	>100	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	9	4	9
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		0	<1	2
Boron	ppm	ASTM D5185m	400	347	232	295
Barium	ppm	ASTM D5185m	200	0	0	<1
Molybdenum	ppm	ASTM D5185m	12	0	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	12	6	<1	2
Calcium	ppm	ASTM D5185m	150	46	61	5
Phosphorus	ppm	ASTM D5185m	1650	1839	1872	1296
Zinc	ppm	ASTM D5185m	125	0	26	6
Sulfur	ppm	ASTM D5185m	22500	24633	20550	35809
Visc @ 40°C	cSt	ASTM D445	109	95.0	104	109

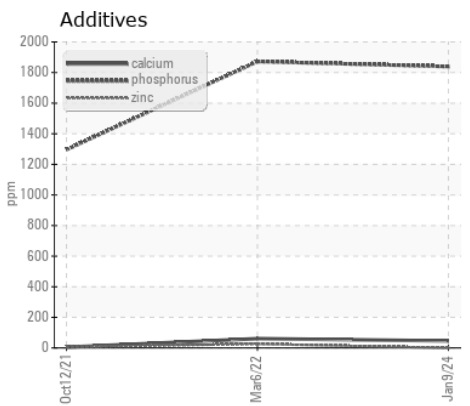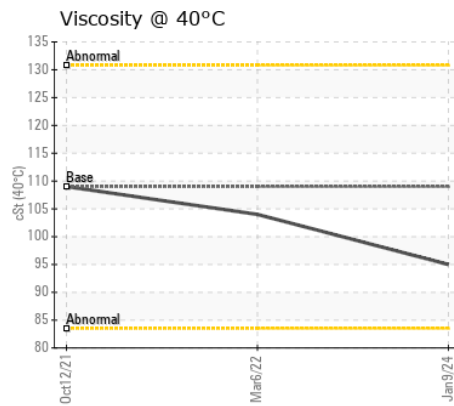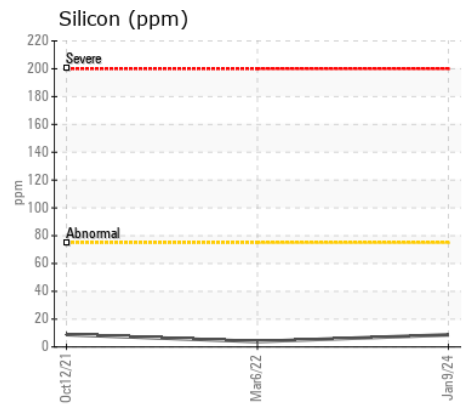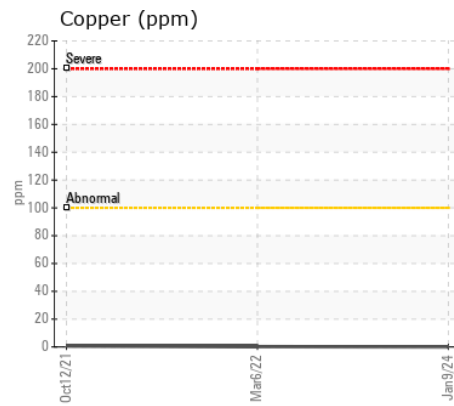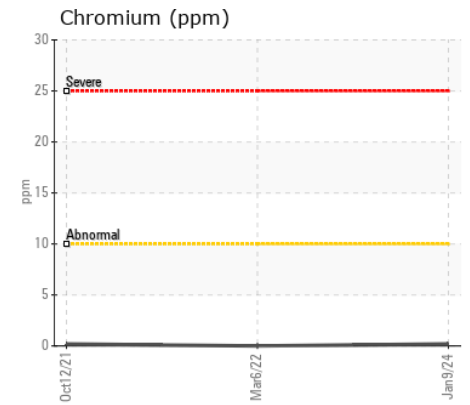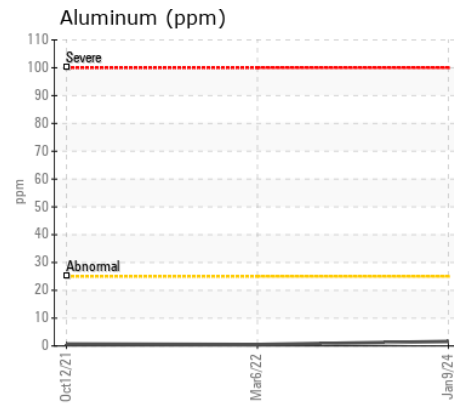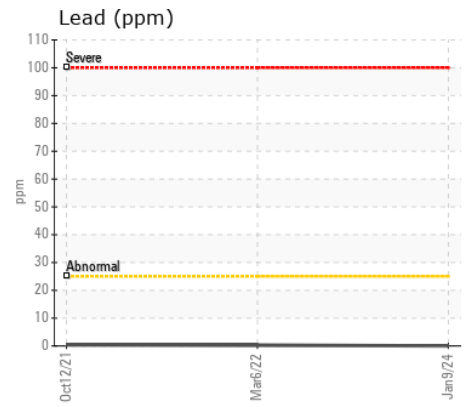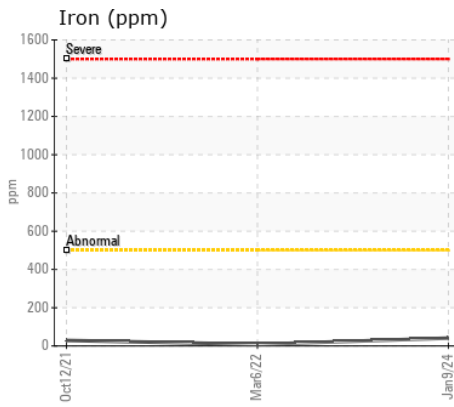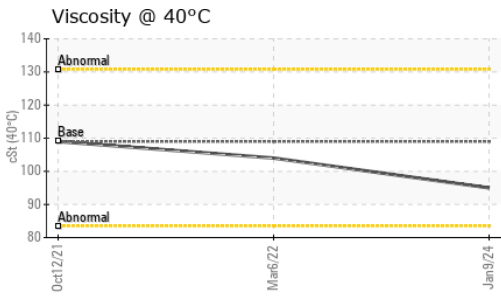

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0032811 **Received** : 10 Jan 2024
Lab Number : 06057039 **Diagnosed** : 11 Jan 2024
Unique Number : 10822988 **Diagnostician** : Wes Davis
Test Package : MOB 1

FRANCIS O DAY
 14900 SOUTHLAWN LN
 ROCKVILLE, MD
 US 20850
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: