



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L70H 622038**

Component  
**Transmission (Manual)**

Fluid  
**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000178</b>	---	---
Sample Date		Client Info		<b>03 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>8065</b>	---	---
Oil Age	hrs	Client Info		<b>4000</b>	---	---
Filter Age	hrs	Client Info		<b>4000</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>113</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>7	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>45	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>20</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>125	<b>10</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Boron	ppm	ASTM D5185m	187	<b>46</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>7</b>	---	---
Magnesium	ppm	ASTM D5185m	6.8	<b>15</b>	---	---
Calcium	ppm	ASTM D5185m	215	<b>174</b>	---	---
Phosphorus	ppm	ASTM D5185m	445	<b>240</b>	---	---
Zinc	ppm	ASTM D5185m	56	<b>78</b>	---	---
Sulfur	ppm	ASTM D5185m	1336	<b>2042</b>	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	<b>27.3</b>	---	---

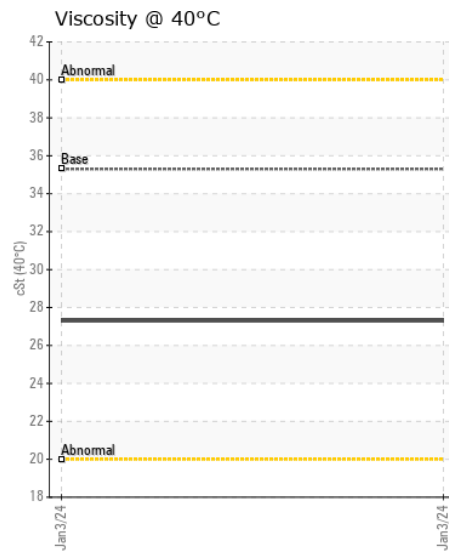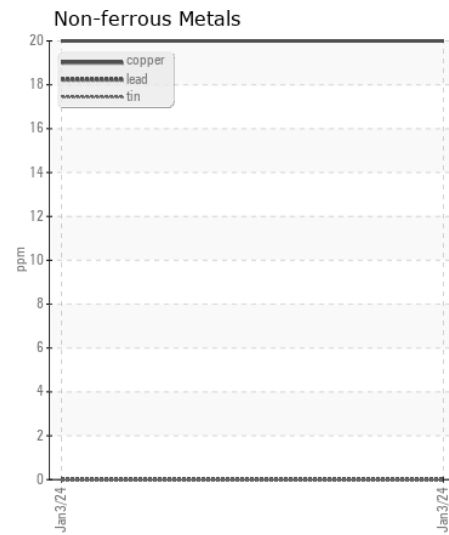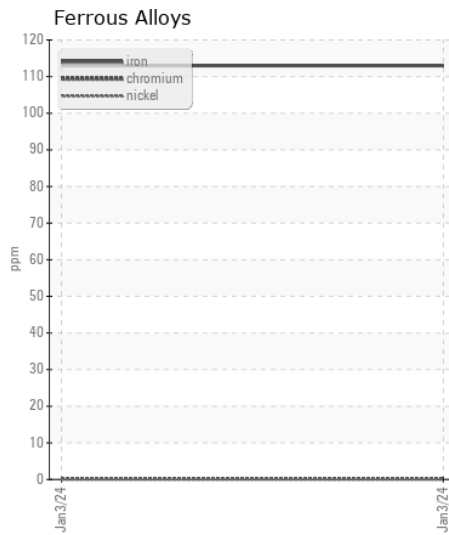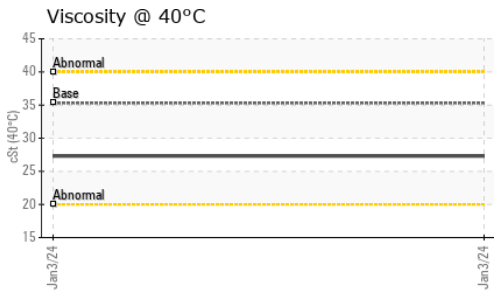

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000178 **Received** : 10 Jan 2024  
**Lab Number** : 06057058 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10823007 **Diagnostician** : Jonathan Hester  
**Test Package** : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**RECYCLE 1**  
 4700 LAWRENCE ST  
 HYATTSVILLE, MD  
 US 20781

Contact: MIKE DESJARDINS  
mdesjarkins@wbwaste.com

T:  
F: