



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
TALLASSEE
Machine Id
927049-162509
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0079718	GFL0092357	GFL0092426
Sample Date		Client Info		20 Dec 2023	04 Dec 2023	17 Oct 2023
Machine Age	hrs	Client Info		17881	17771	318192
Oil Age	hrs	Client Info		17881	17771	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	15	13	49
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	3	2	2
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	5	▲ 17
Lead	ppm	ASTM D5185m	>40	0	0	2
Copper	ppm	ASTM D5185m	>330	<1	<1	3
Tin	ppm	ASTM D5185m	>15	0	<1	1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	10	▲ 31
Potassium	ppm	ASTM D5185m	>20	3	2	7
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	1	0.8	1.2
Nitration	Abs/cm	*ASTM D7624	>20	7.2	6.8	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	18.7	21.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	7	29
Boron	ppm	ASTM D5185m	0	20	10	12
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	58	58	62
Manganese	ppm	ASTM D5185m		0	<1	1
Magnesium	ppm	ASTM D5185m	0	874	919	891
Calcium	ppm	ASTM D5185m		1151	1011	1089
Phosphorus	ppm	ASTM D5185m		972	1032	952
Zinc	ppm	ASTM D5185m		1165	1259	1224
Sulfur	ppm	ASTM D5185m		3182	3191	3104
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	13.7	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	9.0	8.7	7.8
Visc @ 100°C	cSt	ASTM D445	14	13.3	13.5	13.5

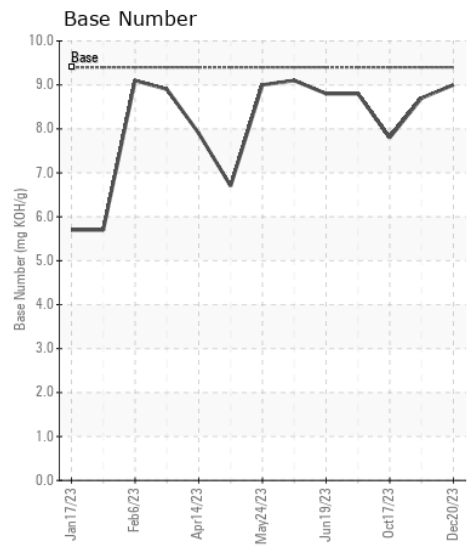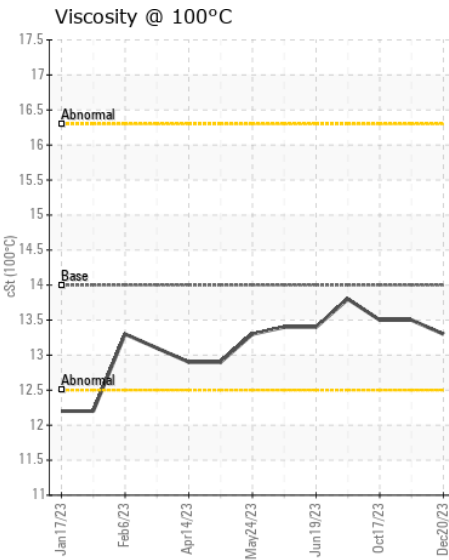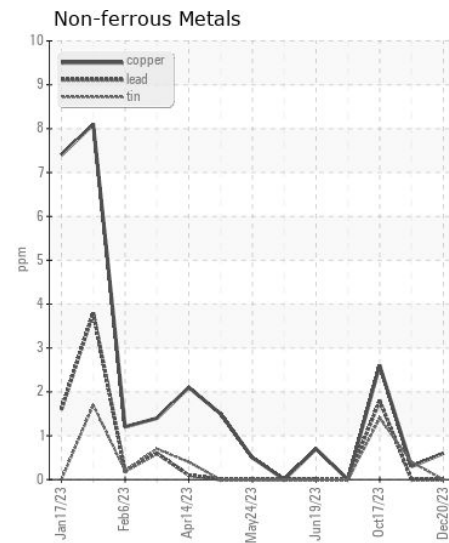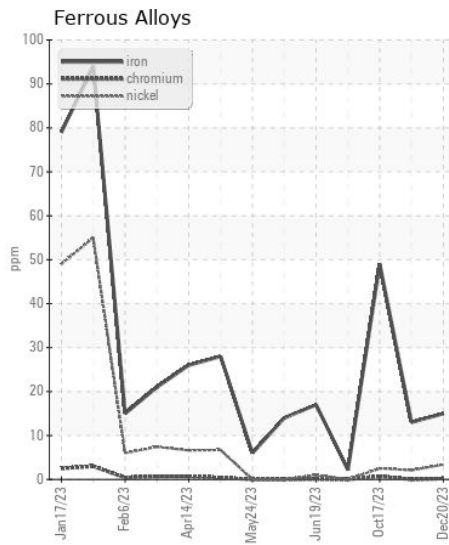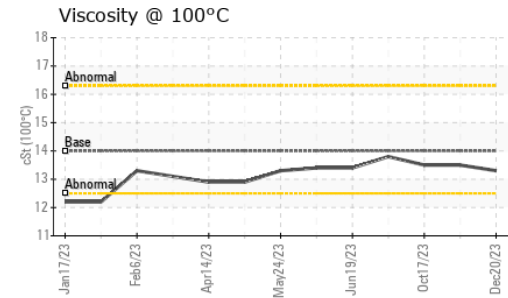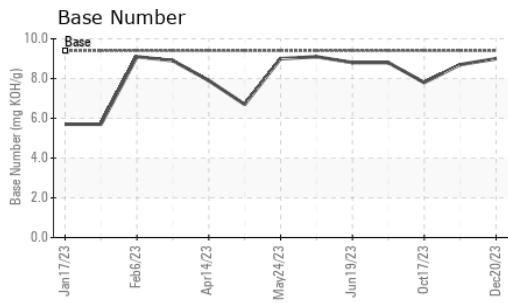

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0079718 **Received** : 10 Jan 2024
Lab Number : 06057296 **Diagnosed** : 11 Jan 2024
Unique Number : 10823245 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee
 Multiple Sites
 Montgomery, AL
 US 36108
 Contact: RICHARD HATFIELD
 rhatfield@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)