



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
Hatchet
 Component
Compressor
 Fluid
PETRO CANADA SENTRON LD 3000 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0111981	PCA0103391	PCA0103390
Sample Date		Client Info		02 Jan 2024	01 Dec 2023	01 Dec 2023
Machine Age	hrs	Client Info		157283	156471	156471
Oil Age	hrs	Client Info		157238	154171	154171
Filter Age	hrs	Client Info		157238	154171	154171
Oil Changed		Client Info		N/A	Oil Added	Oil Added
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<1	1	11
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	1	2
Lead	ppm	ASTM D5185m	>25	0	0	2
Copper	ppm	ASTM D5185m	>50	0	<1	2
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>25	1	2	4
Potassium	ppm	ASTM D5185m	>20	1	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	1	0	11	11
Molybdenum	ppm	ASTM D5185m	2	4	5	11
Manganese	ppm	ASTM D5185m	1	0	<1	<1
Magnesium	ppm	ASTM D5185m	5	7	6	12
Calcium	ppm	ASTM D5185m	1220	1269	1237	2000
Phosphorus	ppm	ASTM D5185m	298	311	298	464
Zinc	ppm	ASTM D5185m	350	320	332	555
Sulfur	ppm	ASTM D5185m	1995	2473	2916	3913
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	0.364	0.44	2.02
Visc @ 40°C	cSt	ASTM D445	124.3	121	118	125

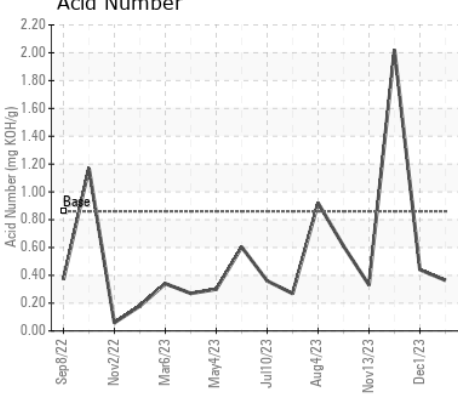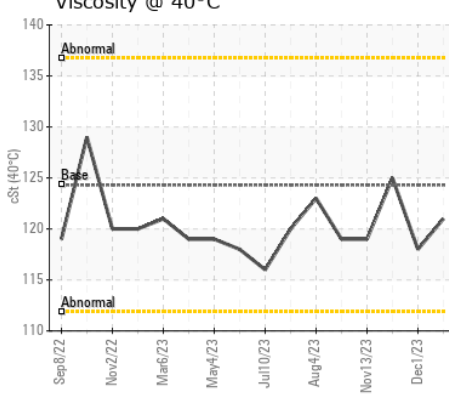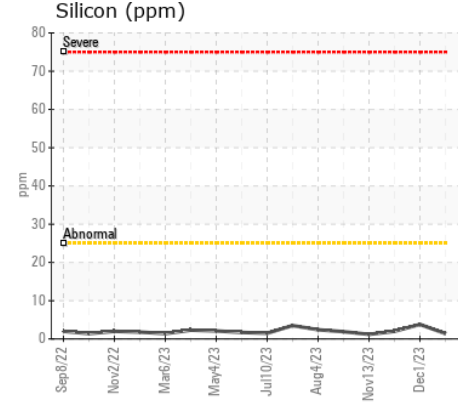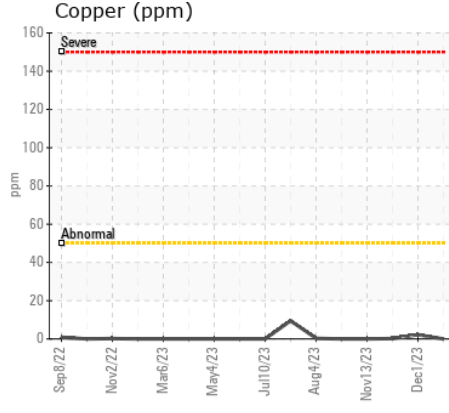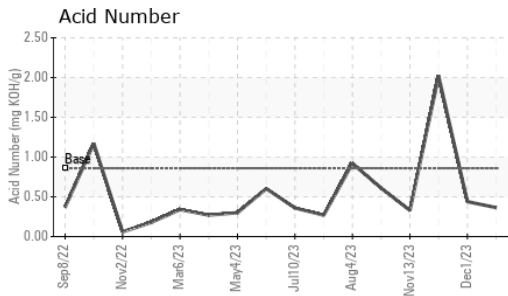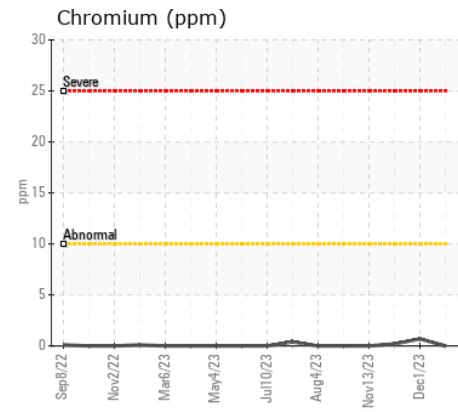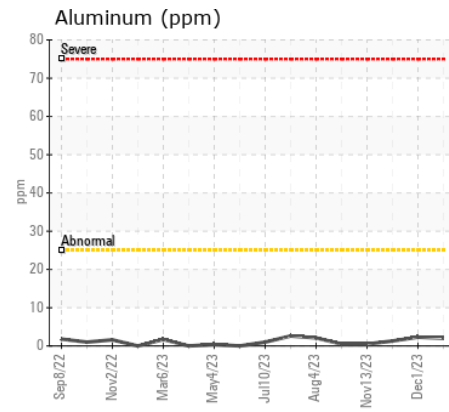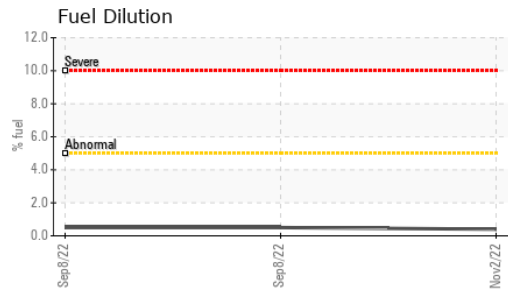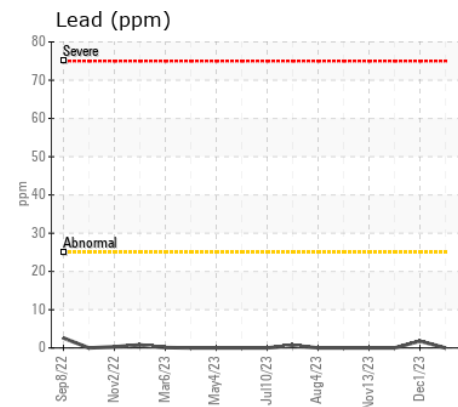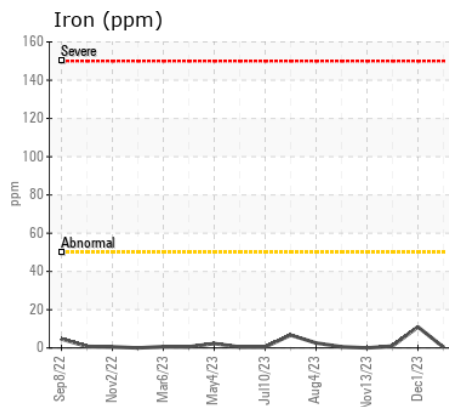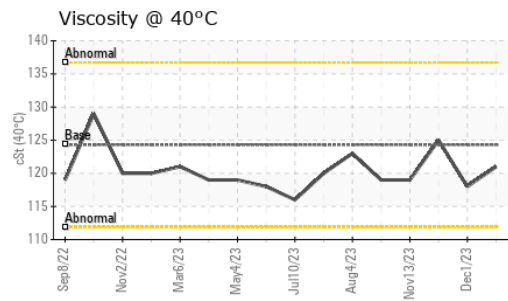

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111981 **Received** : 10 Jan 2024
Lab Number : 06057410 **Diagnosed** : 12 Jan 2024
Unique Number : 10823359 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution)

ENERVEST OPERATING - HATCHET
 126 AILY ROAD
 DANTE, VA
 US 24237
 Contact: Service Manager

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: