



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
Sandy Ridge 1
 Component
Compressor
 Fluid
PETRO CANADA SENTRON LD 3000 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0111982	PCA0103387	PCA0092124
Sample Date		Client Info		04 Jan 2024	06 Sep 2023	10 Jul 2023
Machine Age	hrs	Client Info		41906	39541	38150
Oil Age	hrs	Client Info		39541	39541	37732
Filter Age	hrs	Client Info		39541	39541	38150
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	<1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>25	2	2	1
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	<1
Boron	ppm	ASTM D5185m	5	0	<1	0
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	2	<1	0	8
Manganese	ppm	ASTM D5185m	1	0	<1	0
Magnesium	ppm	ASTM D5185m	5	9	8	7
Calcium	ppm	ASTM D5185m	1220	1256	1322	1342
Phosphorus	ppm	ASTM D5185m	298	319	294	291
Zinc	ppm	ASTM D5185m	350	322	345	352
Sulfur	ppm	ASTM D5185m	1995	2520	2922	3044
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	0.294	0.612	0.30
Visc @ 40°C	cSt	ASTM D445	124.3	120	116	119

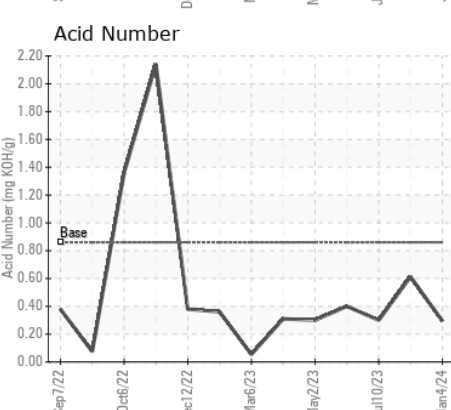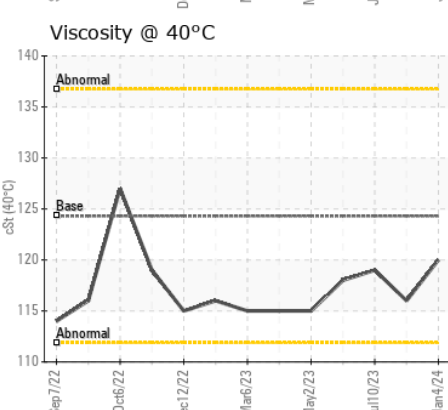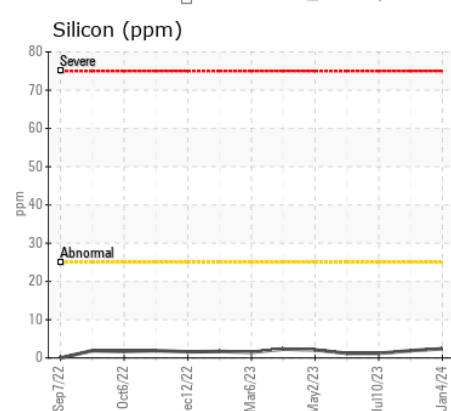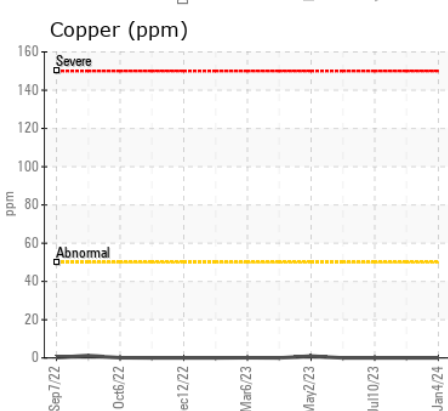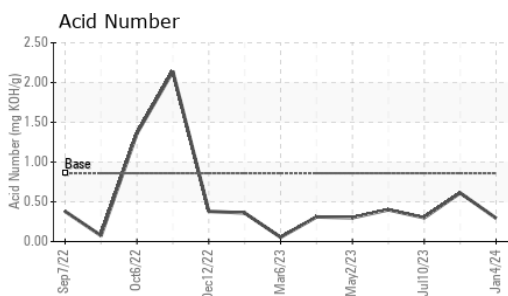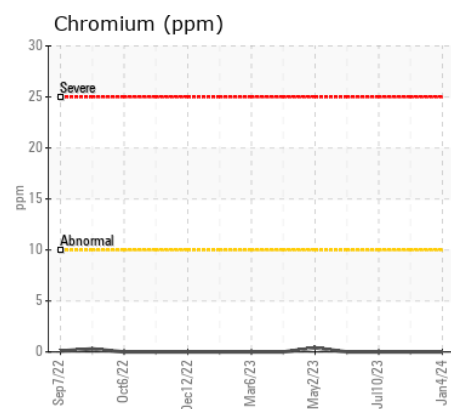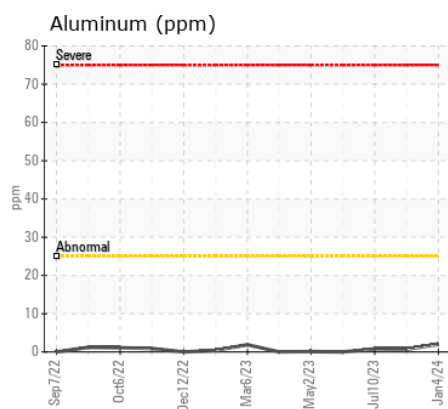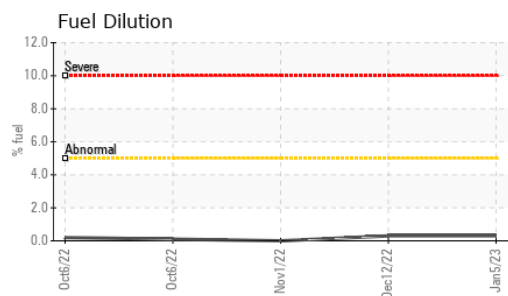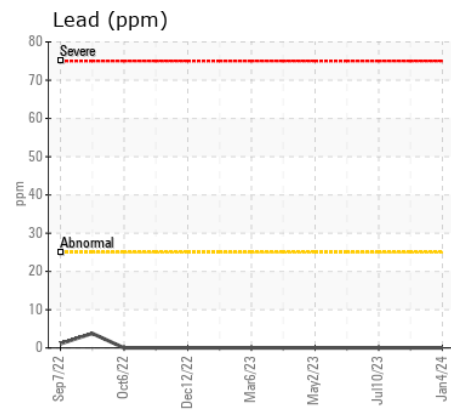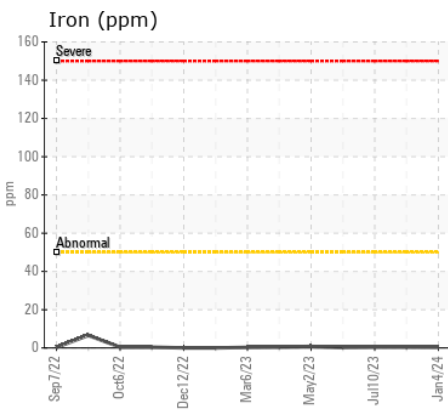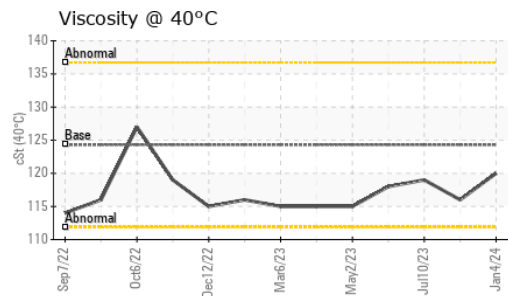

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111982 **Received** : 10 Jan 2024
Lab Number : 06057412 **Diagnosed** : 12 Jan 2024
Unique Number : 10823361 **Diagnostician** : Don Baldridge
Test Package : MOB 2 (Additional Tests: FuelDilution)

ENERVEST OPERATING - SANDY RIDGE
 5020 NEECE CREEK
 NORA, VA
 US 24272
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: