

Machine Id
42
Component
Compressor
Fluid
PETRO CANADA SENTRON LD 3000 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0111888	PCA0111928	PCA0111917
Sample Date		Client Info		02 Jan 2024	04 Dec 2023	09 Nov 2023
Machine Age	hrs	Client Info		97005	96360	96069
Oil Age	hrs	Client Info		2852	2205	1605
Filter Age	hrs	Client Info		2555	1908	1308
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	5	1	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	<1	<1
Lead	ppm	ASTM D5185m	>25	4	3	4
Copper	ppm	ASTM D5185m	>50	15	12	13
Tin	ppm	ASTM D5185m	>15	6	6	6
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	2	1
Potassium	ppm	ASTM D5185m	>20	4	1	<1
Fuel	%	ASTM D3524		0.2	---	---
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624		4.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415		14.7	---	---
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m	5	<1	0	<1
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	0	<1
Manganese	ppm	ASTM D5185m	1	0	0	<1
Magnesium	ppm	ASTM D5185m	5	17	19	17
Calcium	ppm	ASTM D5185m	1220	1394	1402	1344
Phosphorus	ppm	ASTM D5185m	298	322	292	287
Zinc	ppm	ASTM D5185m	350	344	370	351
Sulfur	ppm	ASTM D5185m	1995	2723	2618	2508
Oxidation	Abs/.1mm	*ASTM D7414		8.7	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	0.318	0.31	0.31
Base Number (BN)	mg KOH/g	ASTM D2896	3.85	3.19	---	---
Visc @ 40°C	cSt	ASTM D445	124.3	121.1	121	121
Visc @ 100°C	cSt	ASTM D445	13.7	13.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270	106	104	---	---

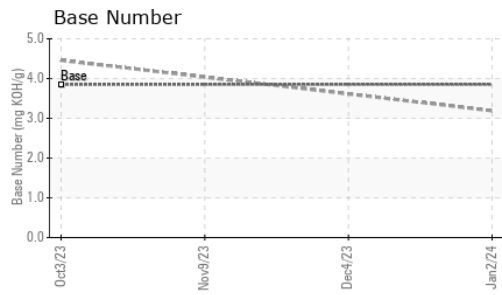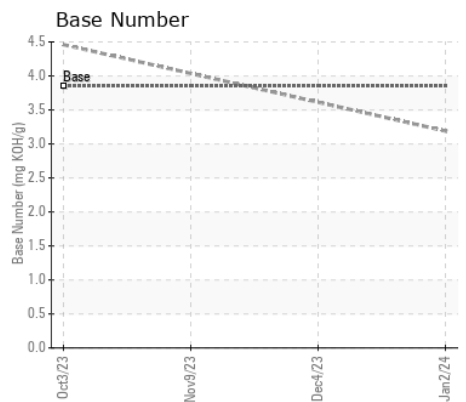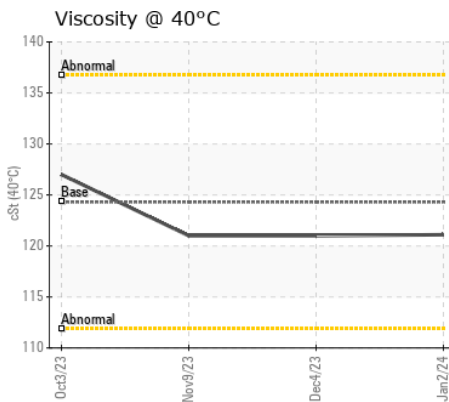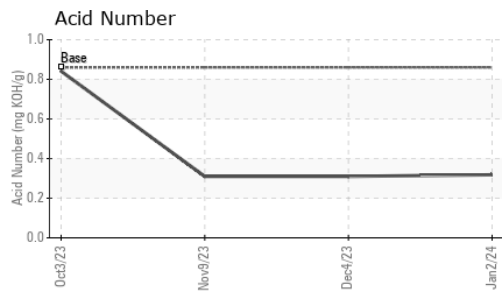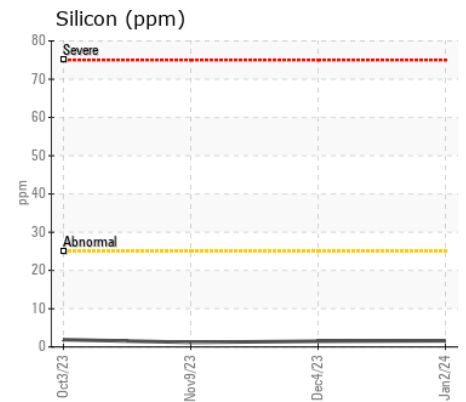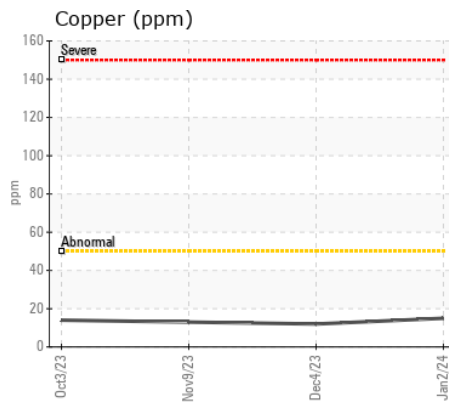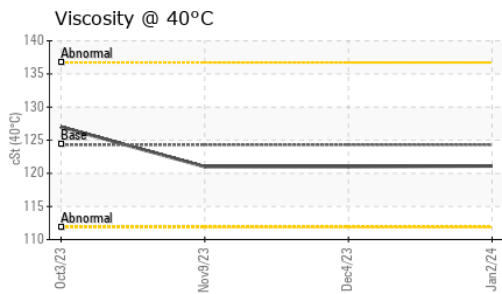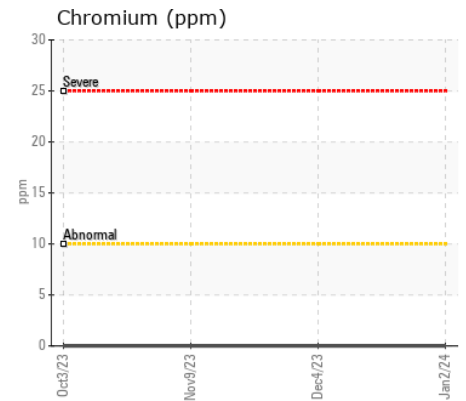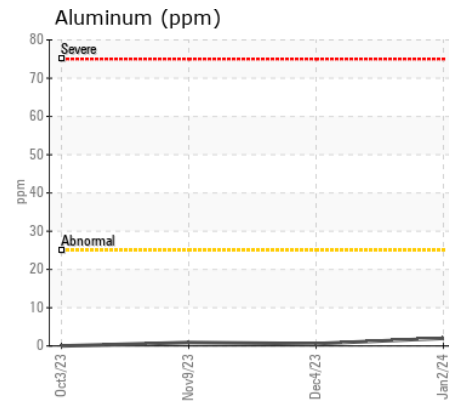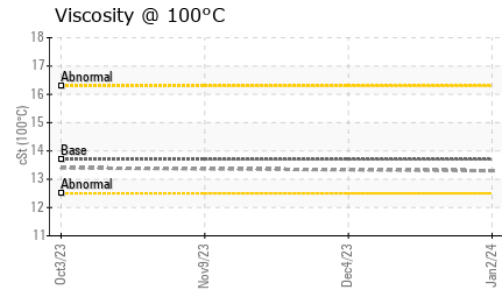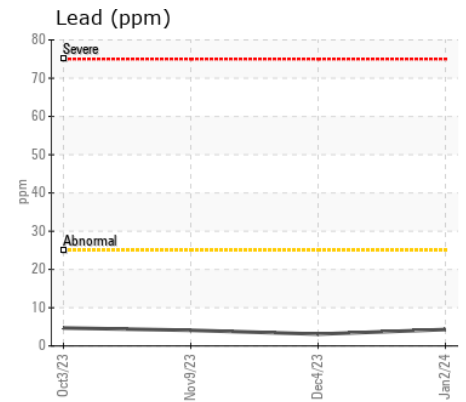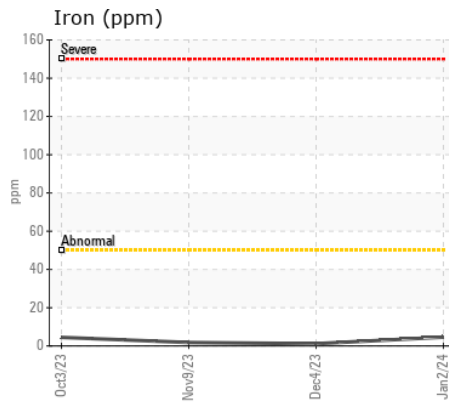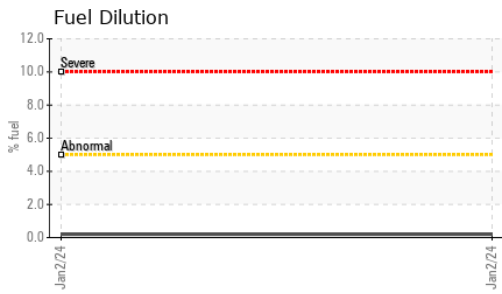

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111888 **Received** : 10 Jan 2024
Lab Number : 06057447 **Diagnosed** : 17 Jan 2024
Unique Number : 10823396 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, FuelDilution, KV100, PercentFuel, TBN, VI) Contact: Service Manager

ENERVEST OPERATING - HAYS BOOSTER
 1705 BREAKS PARK ROAD
 HAYS1, VA
 US 24256

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)