



OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
NORMAL

Machine Id
H0052

Component
Power Take Off

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0865348	---	---
Sample Date		Client Info		19 Dec 2023	---	---
Machine Age	hrs	Client Info		432	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>200	178	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>50	▲ 107	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>200	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>50	▲ 354	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	62	---	---
Boron	ppm	ASTM D5185m	250	3	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	19	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	450	517	---	---
Calcium	ppm	ASTM D5185m	3000	1912	---	---
Phosphorus	ppm	ASTM D5185m	1150	1117	---	---
Zinc	ppm	ASTM D5185m	1350	1286	---	---
Sulfur	ppm	ASTM D5185m	4250	3559	---	---
Visc @ 40°C	cSt	ASTM D445	115	59.6	---	---

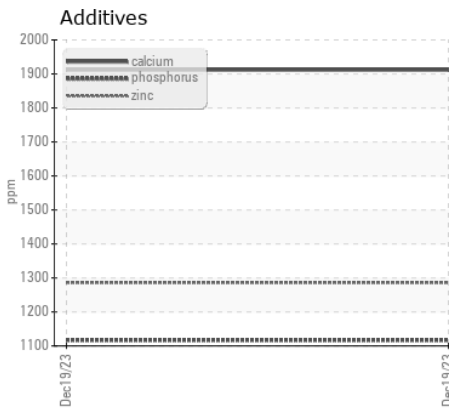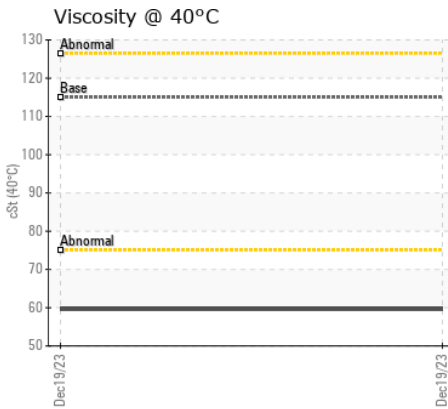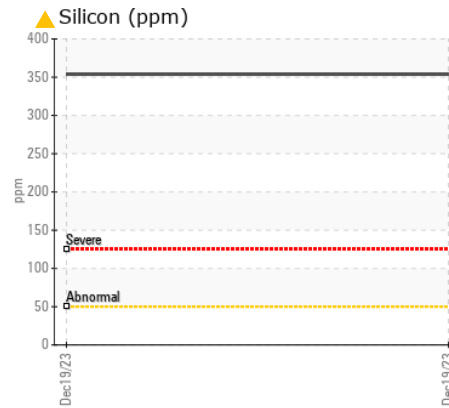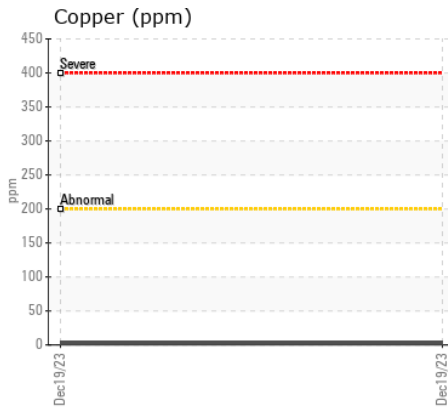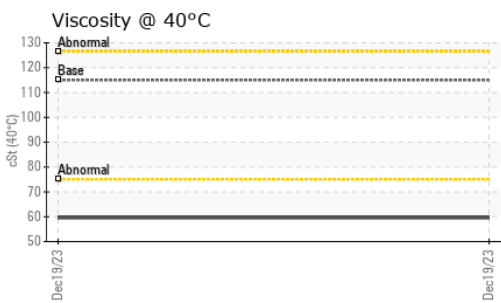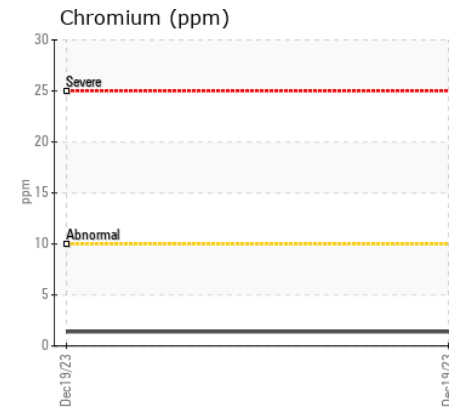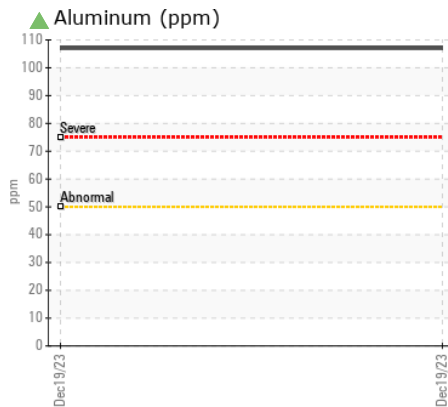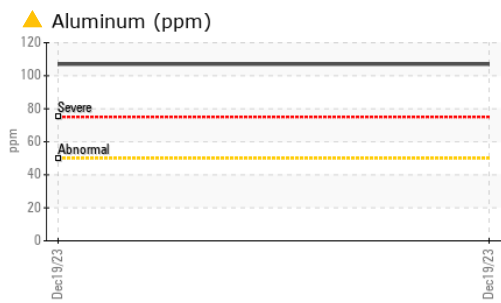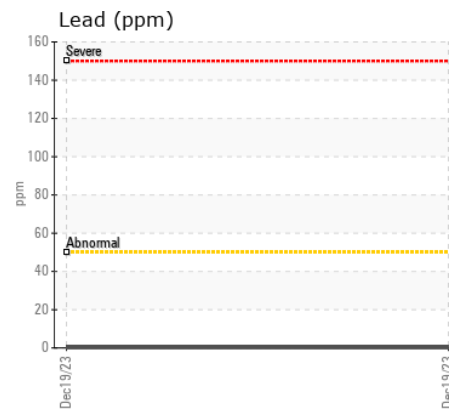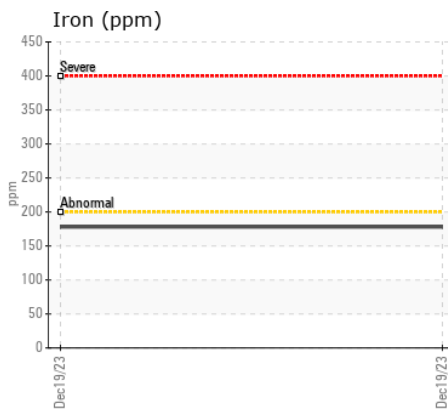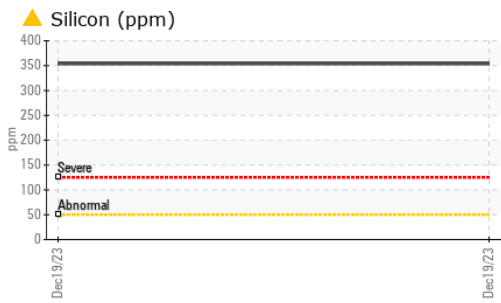

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0865348 **Received** : 10 Jan 2024
Lab Number : 06057537 **Diagnosed** : 12 Jan 2024
Unique Number : 10823486 **Diagnostician** : Don Baldrige
Test Package : MOB 1

BAE SYSTEMS
 34201 VAN DYKE AVE
 STERLING HEIGHTS, MI
 US 48312
 Contact: ISAAC RIFE
 isaac.rife@baesystems.com
 T: (248)318-4314
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)