



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
[67849]
 Machine Id
TTH037
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 sampled fluid)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086560	---	---
Sample Date		Client Info		03 Jan 2024	---	---
Machine Age	hrs	Client Info		502	---	---
Oil Age	hrs	Client Info		502	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	1	---	---
Copper	ppm	ASTM D5185m	>75	4	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<1	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION


Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	0	0	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m	0	<1	---	---
Magnesium	ppm	ASTM D5185m	0	<1	---	---
Calcium	ppm	ASTM D5185m	50	45	---	---
Phosphorus	ppm	ASTM D5185m	330	419	---	---
Zinc	ppm	ASTM D5185m	430	509	---	---
Sulfur	ppm	ASTM D5185m	760	1003	---	---
Visc @ 40°C	cSt	ASTM D445	67.4	▲ 43.3	---	---


▲ Viscosity @ 40°C




Iron (ppm)

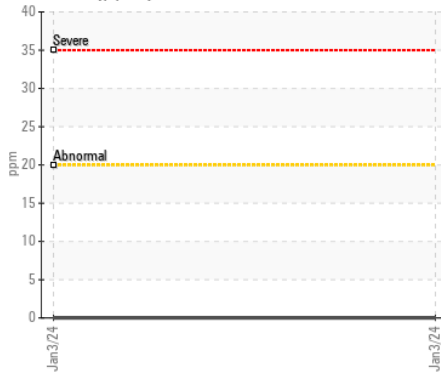


Lead (ppm)

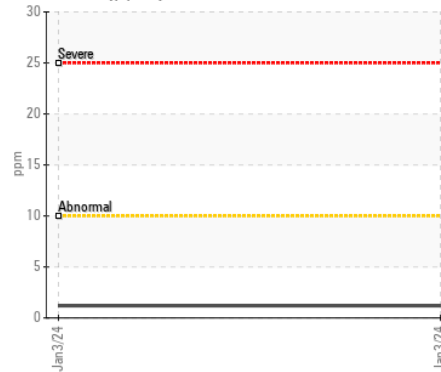


Aluminum (ppm)

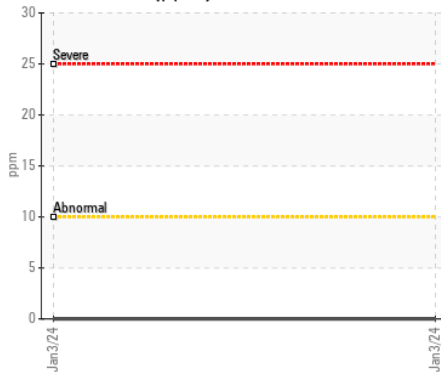


Chromium (ppm)

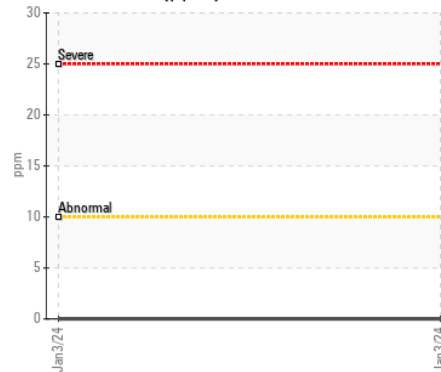


Copper (ppm)

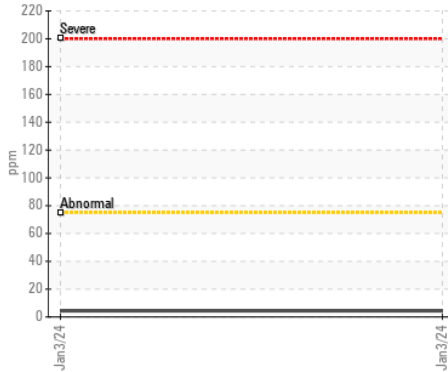


Silicon (ppm)

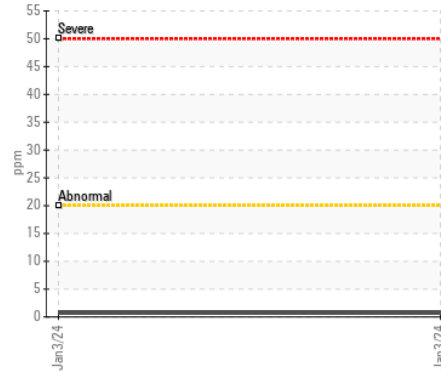

▲ Viscosity @ 40°C

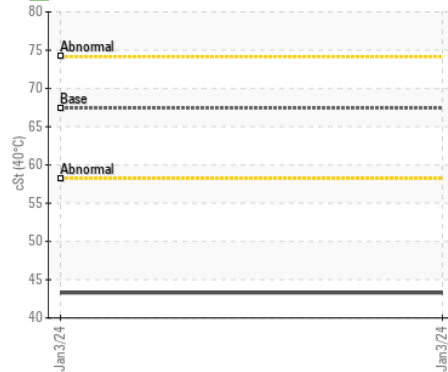

Additives

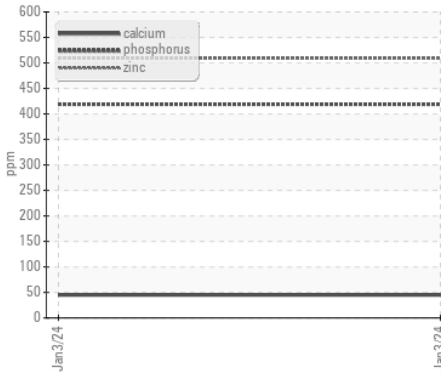

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0086560 Recieved : 10 Jan 2024
 Lab Number : 06057547 Diagnosed : 12 Jan 2024
 Unique Number : 10823496 Diagnostician : Don Baldrige
 Test Package : MOB 1

Kemp Quarries - River Valley - Arkoma
 12971 HWY 9a
 Shawnee, OK
 US 74804
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

arkomashop@kempquarries.net

T:
F: