



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Machine Id
JOHN DEERE 135G TH23 (S/N 1FF135GXPDE400401)

Component
Hydraulic System

Fluid
DURALENE Trans-Flo UTF (--- QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Recommend drain oil if not already done. Reduce drain interval to 2000 hours or drain and flush and use recommended zinc free oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033122	DC0018823	DC0010939
Sample Date		Client Info		09 Jan 2024	07 Jun 2022	08 Sep 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

The iron level is abnormal.

Iron	ppm	ASTM D5185m	>32	▲ 80	▲ 47	▲ 55
Chromium	ppm	ASTM D5185m	>9	9	<1	3
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		2	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>9	▲ 24	3	7
Lead	ppm	ASTM D5185m	>28	2	<1	0
Copper	ppm	ASTM D5185m	>50	17	7	19
Tin	ppm	ASTM D5185m	>5	2	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.


Silicon	ppm	ASTM D5185m	>11	▲ 58	10	16
Potassium	ppm	ASTM D5185m	>20	6	2	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION


Zinc level above manufacturer's recommendations.

Sodium	ppm	ASTM D5185m	>21	6	1	5
Boron	ppm	ASTM D5185m		48	58	39
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		<1	<1	2
Manganese	ppm	ASTM D5185m		2	<1	<1
Magnesium	ppm	ASTM D5185m		28	16	13
Calcium	ppm	ASTM D5185m		2028	1623	1652
Phosphorus	ppm	ASTM D5185m		898	767	750
Zinc	ppm	ASTM D5185m		▲ 875	735	676
Sulfur	ppm	ASTM D5185m		2191	1864	1491
Visc @ 40°C	cSt	ASTM D445		42.2	42.1	46.4


▲ Ferrous Alloys

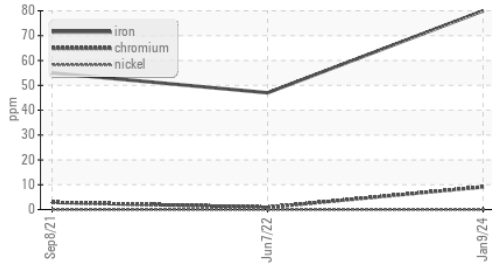


▲ Iron (ppm)

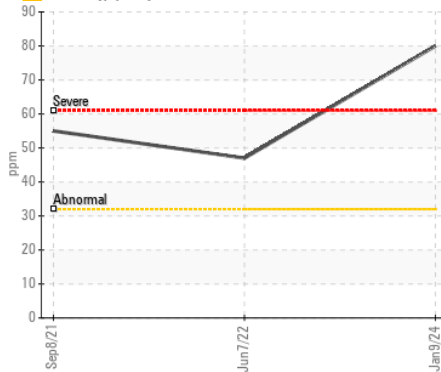


▲ Lead (ppm)

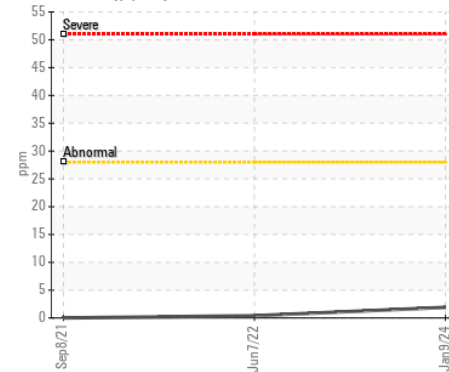


▲ Silicon (ppm)

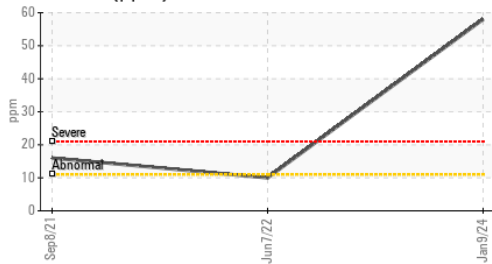


▲ Aluminum (ppm)

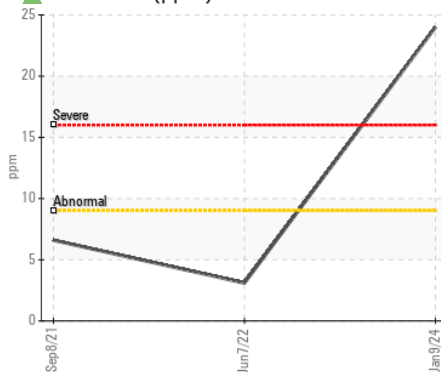


▲ Chromium (ppm)

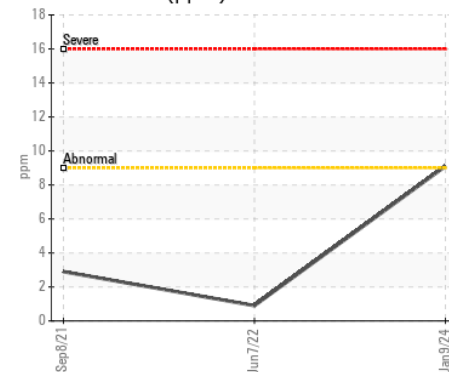


▲ Additives

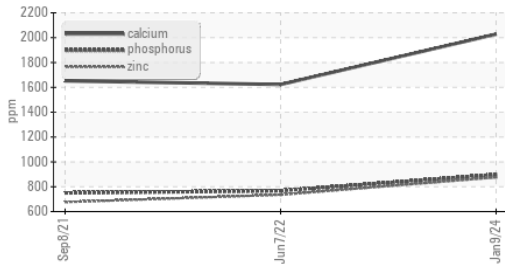


▲ Copper (ppm)

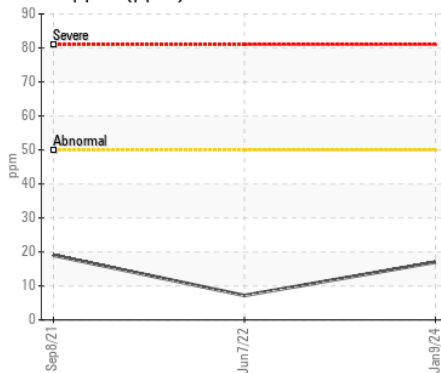


▲ Silicon (ppm)

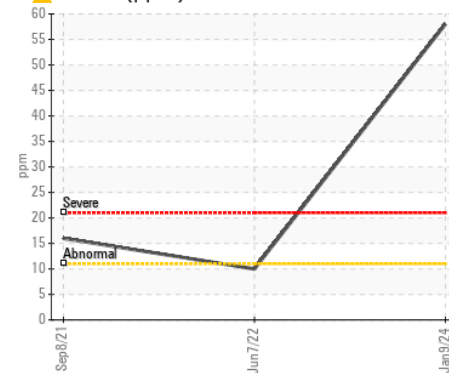


▲ Aluminum (ppm)

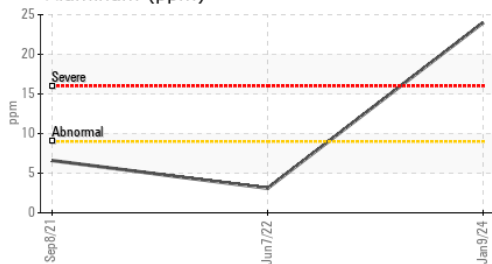


▲ Viscosity @ 40°C

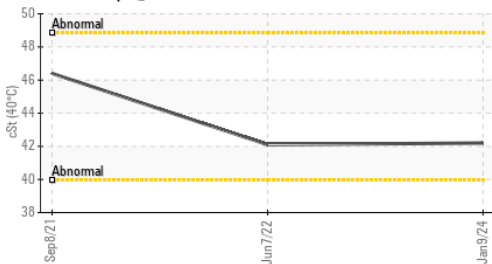

▲ Viscosity @ 40°C

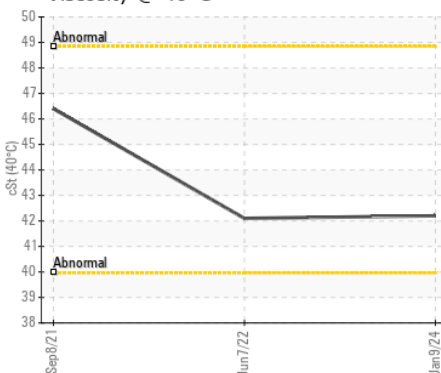

▲ Additives

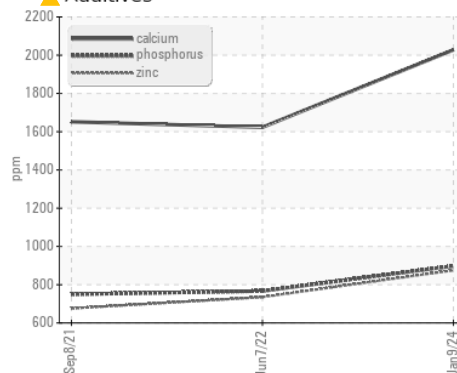

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033122 **Received** : 10 Jan 2024
Lab Number : 06057552 **Diagnosed** : 12 Jan 2024
Unique Number : 10823501 **Diagnostician** : Don Baldrige
Test Package : MOB 1

MAGSTONE

4141 BARKHILL RD
 UNION BRIDGE, MD
 US 21791

Contact: JACOB FLAUGHER
 jflaugher.magstone@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: