



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**713030**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0097487</b>	GFL0097514	GFL0092915
Sample Date		Client Info		<b>05 Jan 2024</b>	20 Oct 2023	08 Sep 2023
Machine Age	hrs	Client Info		<b>2861</b>	2206	2034
Oil Age	hrs	Client Info		<b>1285</b>	1285	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>5</b>	11	6
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	3	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	7	6
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>1</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	4
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.4</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	8.3	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.5</b>	19.7	18.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	3
Boron	ppm	ASTM D5185m	0	<b>6</b>	7	11
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	60	<b>57</b>	64	61
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>906</b>	924	958
Calcium	ppm	ASTM D5185m	1070	<b>1026</b>	1097	1204
Phosphorus	ppm	ASTM D5185m	1150	<b>934</b>	1014	1021
Zinc	ppm	ASTM D5185m	1270	<b>1239</b>	1238	1248
Sulfur	ppm	ASTM D5185m	2060	<b>2751</b>	3329	3609
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	15.7	13.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.0</b>	7.7	8.0
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	13.2	13.4

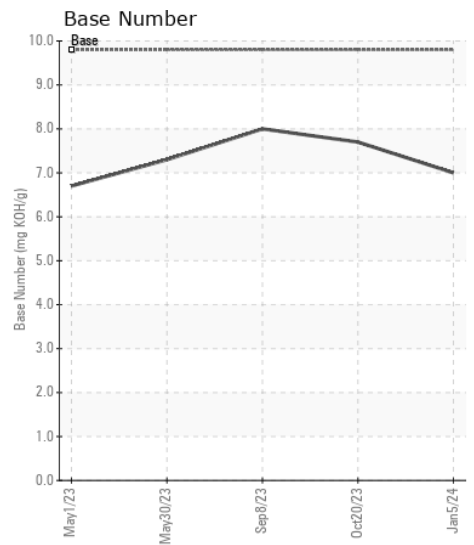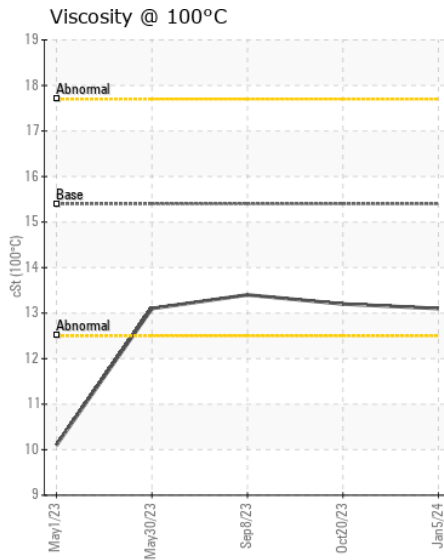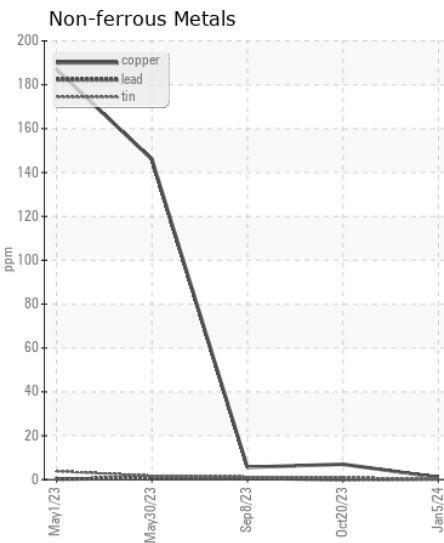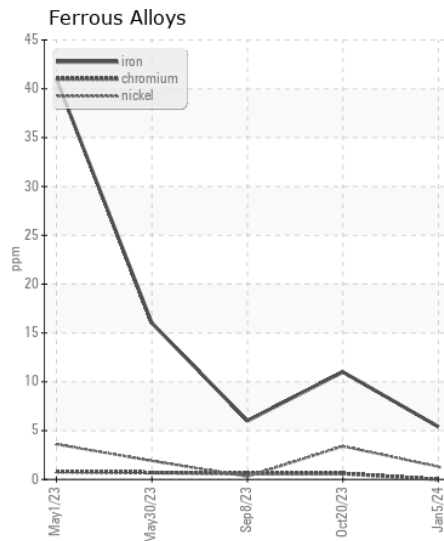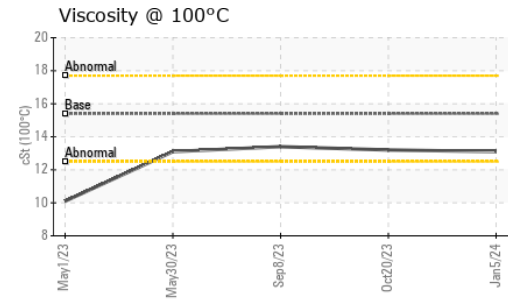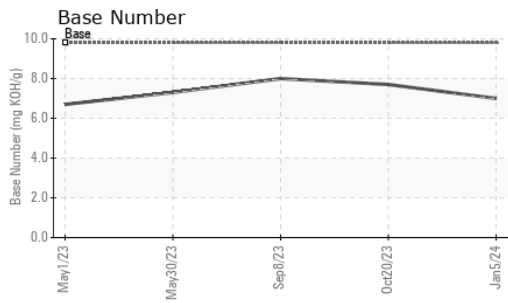

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0097487 **Received** : 11 Jan 2024  
**Lab Number** : 06057716 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10823665 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 641 - Alpena**  
 1241 KING SETTLEMENT RD  
 ALPENA, MI  
 US 49707  
 Contact: DYLAN TOLAN  
 dylan.tolan@gflenv.com  
 T: (989)854-7203  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)